



collingwood

**August 2024**

Essentials



# Light **Your** Moment

We believe in helping  
people light their  
moments sustainably

by continuously pushing the boundaries of LED lighting technology. We design our products with people's experience at heart, to enhance everyday life, and build a better future. Every occasion matters, we don't make lights, we make moments.





# Contents

## 01 Introduction

- 04 Light a better future
- 06 Greener packaging
- 08 Fast reliable service
- 10 No substitute for quality
- 12 What new?

## 14 Residential

- 18 Residential downlights
- 21 Bezel accessories

## 28 Strip lighting

- 32 LED Strip
- 42 Drivers
- 44 Profiles & Accessories

## 56 Floodlights

- 56 Residential floodlights

## 66 Commercial

- 66 Panels
- 78 Surface & Suspended
- 88 Battens
- 100 Commercial downlights
- 112 Commercial outdoors
- 124 Bulkheads

## 136 Emergency

- 140 Blade
- 141 Box
- 142 Bulkheads
- 143 Max
- 144 Emergency spot
- 145 Surface emergency spot
- 146 Twin spot
- 147 Accessories



## 48 | Landscape

48 | Wall lights

## 148 | Industrial

148 | Anti-corrosives  
162 | High bays  
182 | High / Low bays  
192 | Floodlights





An aerial photograph of a vast, dense forest of evergreen trees, likely spruce or fir, covering a hillside. The trees are tightly packed, creating a textured green surface. A semi-transparent teal graphic element is overlaid on the left side of the image.

**We aim to  
be carbon  
neutral by  
2030**



# Light a better future

## Sustainability is at the core of everything we do

Our commitment to tackle environmental challenges means we are pro-actively taking action to minimise the impact of our materials used and operations, to build towards carbon neutrality.



### Bronze medal EcoVadis

Methodology built on international sustainability standards. EcoVadis is the world's largest and most trusted provider to rate our business and provide you with transparency about our environmental, social and ethical performance - or sustainability. We are pleased to share that our sustainability efforts this past year has increased our score from 60 to 63, earning EcoVadis bronze medal. Placing us in the top 19%



### Recycling

- 100% of cardboard waste is either used as shredded packaging filler or recycled.
- 100% of plastic waste is used in bales or recycled.
- 100% of our warehouse pallets are recycled.



### Energy from renewable sources

100% of our electricity all comes from renewable energy sources such as solar and wind turbines.



### Waste experts partnership

We partner with waste experts to enhance our overall environmental performance.

- 100% of waste is diverted from landfill.
- 96% of waste is recycled, with the remaining 4% being recovered as energy from waste.
- Consolidating waste pick ups to minimise our carbon footprint.
- Euro 6 standard for all waste pick up vehicles.

# Greener packaging

## Reduce, re-use & recycle

As packaging is the most produced item to a business outside of the products themselves, we know how important it is to do everything we can to minimise the impact it has on the environment.



### 100% recyclable

- Our boxes are made entirely from card to make them easy to recycle.
- No plastics used to make our boxes (including the finish of the box).
- Vegetable oil inks are used to ensure they are recyclable.




### FSC approved card

The card used in our boxes comes from FSC approved forests. This means that the card used to make the box comes from a replenishable forest and for every tree used another one is planted.



### Less wastage

We make sure our boxes are designed to use as little material as possible to minimise their carbon footprint.



### Less ink

Our new brown box design uses significantly less ink than a full colour box with images. When producing the packaging this makes the carbon footprint much smaller.











# Fast reliable service

## We're here to help you succeed

We believe you have the ability to create amazing projects and we want to help you achieve it. We pride ourselves on always being readily available to provide a level of service that gets you what you need to excel and achieve unbelievable things.



**Place an order  
before 3pm**



**Free next day direct  
to site delivery**



### Free on site support

On large scale projects a member of our technical support team will go to your site to help plan your installation to ensure you have a smooth installation.



### Free on the phone support

Readily available and with expert knowledge of our product portfolio our technical support team are on hand to answer any question you have about our products.



### Online support

To ensure you get the support you need 24 hours a day we offer online support.

- Detailed product information on our website.
- Email updates to keep you informed.
- Literature available on our website.
- Product configurators to help you make the right choice easily.

# No substitute for quality

## You can be confident with us

Since we were established in 1901 we have been driven to deliver nothing but the highest quality in everything we do. We offer longer warranties and get third party accreditation to ensure you can trust in our products as we do.



### LIA accreditation

The Lighting Industry Association Quality Assurance scheme is a quality assurance scheme developed by industry experts. The scheme assesses the members quality system and product compliance, and supports the member in achieving and maintaining the standard expected for LIA membership. Collingwood have been awarded the LIAQA Assured Company mark.



### EDA accreditation

The EDA (Electrical Distributors' Association) is the trade association that represents the interests of wholesale distributors of electro-technical products in the UK. Collingwood are a product affiliate and together we work for the good of the sector.



### Long product warranties

You can trust in our products as we do. We offer up to 10 year warranties on our products because we believe in our products. They all go through vigorous testing to ensure they are of the highest quality that will stand the test of time.



### Two year on site warranty

We offer a two year on site warranty for all **commercial** and **industrial** lighting products.





We test all  
our products  
in our own  
**state of  
the art lab**

# What's new?

## Take a look at all of our new additions

We continuously push our product portfolio to make sure you have the best possible lights for your installations, with an emphasis on quality of light and ease of installation.



### H2 Sense

#### PIR Downlight

Pages 22-23

Now available in brushed steel finish. Integral emergency also available.



### H2 Deco

#### Baffled downlight

Pages 24-26

Architectural downlight with baffle for visual comfort



### WL95 Versa

#### Bulkhead

Pages 130-136

Wattage & colour switchable bulkheads with plug-in accessories.



### Trinity

#### Direct/Indirect UGR19 Recessed Modular

Pages 70-71

Wattage switchable recessed panel with optional plug-in PIR accessory







## Uniform Versa

### UGR 19 Classroom solution

Page 92

Wattage switchable linear with outstanding lit effect. Versa plug n play kits for emergency and sensor options.



## Caiman Versa

### IP66 Anti-Corrosive

Pages 152-159

Wattage & colour switchable anti-corrosives with unique installation feature



## Hydra CSP

### Modular Bollard

Pages 119-123

Interchangeable heads to make for easy stocking. Wattage & colour switchable.



## RackBay CSP

### Industrial low bay

Pages 186-191

Wattage & colour switchable low/high bays suitable for mounting from 3 up to 14 metres high



# Residential downlights





# Residential downlights

## H2 Lite, H2 Pro Extreme CSP and H4 Lite

### Upgradeable, Re-useable, lights that lasts

With approximately 5 million units supplied to a wide range of customers, H2 Lite, H4 Lite and H2 Pro Extreme have a proven history of excellent performance, fast installation, and lifetime you can trust.

Our next generation design builds on this further to offer the below new feature and benefits:

- Optimised design with no waste, minimizing the use of materials and impact on the planet.
- FSC certificated packaging ensure minimal waste.
- NEW unique interchangeable design which allows the driver to easily be replaced should it fail.

Backed by an industry leading warranties and should you have an issue, replacement drivers are stocked in the UK for quick after sales support.





## Colour switchable product

### One light, three or four colour temperatures

Always have the correct product on hand. Our range of colour switchable downlights are available to stock in 3 or 4 colour temperatures in 1 product (2200K, 2700K, 3000K & 4000K).

#### Advantages

- Simpler product range.
- Products can be adjusted after they are installed.

2200K



2700K




3000K



4000K



Use the CCT switch to choose the ideal colour for your installation.

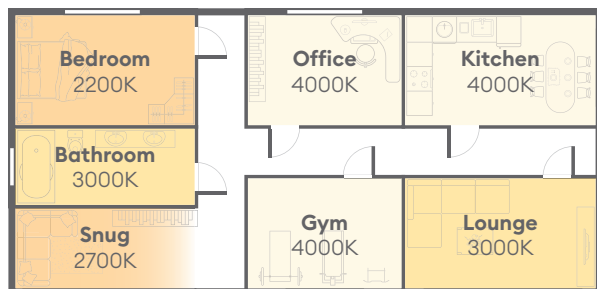


## Insulation coverable

### Install the product directly under insulation

Many of our downlights are insulation coverable, suitable for both rolled and blown installation.

#### Advantages

- Quick & easy to install.
- No need to buy insulation protectors.

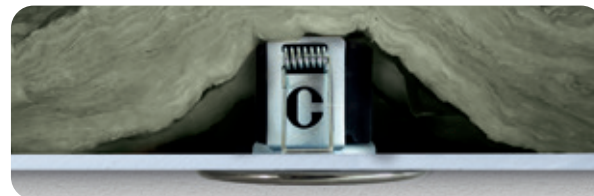

## I-joint and metal web approved

### Perfect for every installation

Our downlights have undergone vigorous testing to ensure they are perfect for use with I-joists, metal web and solid timber ceiling types.



# Residential downlights



Patented Easy-fit  
connector for first &  
second fix




Shallow depth 46mm



Insulation coverable

Guarantee	10 years
Connector	Easy-fit connector
IP rating	IP65 (from below) IP20 (from above)
Bathroom zone	1
Dimmable	Yes (Mains)
Tilttable	No
CRI	CRI>80
Input	220-240V AC
SELV	Yes
Building regulations	Part B, C, E, P & L
Cut-out size	64-72
Insulation coverable	Rolled and blown insulation
Ceiling joist approved	Solid timber, I-Joist and Metal Web



# H2 Lite fixed

TRIAC Dimmable, fire-rated downlight with integrated  
bezel & Easy-fit connector



Multipack  
8 x H2 Lite  
White bezel included



Product code	Finish	Type	W	CCT	Beam angle	Im	Im/W	Energy
DLT388BLK5530	Matt black	Single unit	4.3W	3000K	55°	460	107	
DLT388BLK5540	Matt black	Single unit	4.3W	4000K	55°	490	114	
DLT388BS5530	Brushed steel	Single unit	4.3W	3000K	55°	460	107	
DLT388BS5540	Brushed steel	Single unit	4.3W	4000K	55°	490	114	
DLT388MW5530	Matt white	Single unit	4.3W	3000K	55°	460	107	
DLT388MW5540	Matt white	Single unit	4.3W	4000K	55°	490	114	
DLT388MW5530A8	Matt white	Multipack x 8	4.3W	3000K	55°	460	107	




# H4 Lite adjustable

TRIAC Dimmable, adjustable fire-rated downlight with integrated bezel & Easy-fit connector

**10** year  
guarantee



**Repairable  
design**



## Residential downlights



**Patented Easy-fit  
connector for first &  
second fix**




**Adjustable with a 20° tilt**



**Insulation coverable**

<b>Guarantee</b>	10 years
<b>Connector</b>	Easy-fit connector
<b>IP rating</b>	IP65 (from below) IP20 (from above)
<b>Bathroom zone</b>	1
<b>Dimmable</b>	Yes (Mains)
<b>Tiltable</b>	20°
<b>CRI</b>	CRI>80
<b>Input</b>	220-240V AC
<b>SELV</b>	Yes
<b>Building regulations</b>	Part B, C, E, P & L
<b>Cut-out size</b>	68-72
<b>Insulation coverable</b>	Rolled and blown insulation
<b>Ceiling joist approved</b>	Solid timber, I-Joist and Metal Web

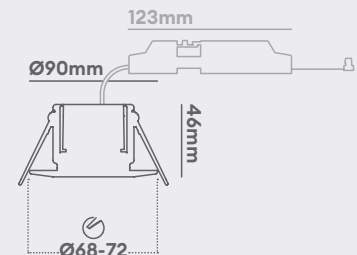

Product code	Finish	W	CCT	Beam angle	lm	lm/W	Energy
DL490BLK5530	Matt black	4.3W	3000K	55°	460	107	
DL490BLK5540	Matt black	4.3W	4000K	55°	490	114	
DL490BS5530	Brushed steel	4.3W	3000K	55°	460	107	
DL490BS5540	Brushed steel	4.3W	4000K	55°	490	114	
DL490MW5530	Matt white	4.3W	3000K	55°	460	107	
DL490MW5540	Matt white	4.3W	4000K	55°	490	114	



Residential  
downlights



Colour switchable  
between 2700K, 3000K  
and 4000K




Wattage switchable  
between 4.2W & 6W



Switches allow you  
to choose options at  
installation

Guarantee	7 years
Connector	2 part first fit connector
IP rating	IP65 (from below) IP20 (from above)
Bathroom zone	1
Dimmable	Yes (Mains)
Tiltable	No
CRI	CRI>80
Input	220-240V AC
SELV	No
Building regulations	Part B, C, E, P & L
Cut-out size	68-72
Insulation coverable	Rolled and blown insulation
Ceiling joist approved	Solid timber, I-Joist and Metal Web



# H2 Lite CSP

Colour & Wattage Switchable using switches under bezel



**Multipack**  
8 x H2 Lite CSP  
White bezel included

Switches  
under bezel



Click Flow  
compatible



Product code	Finish	Type	W	CCT	Beam angle	lm	lm/W	Energy
DLT551500A	White bezel included	Single unit	4.2W	2700K	55°	450	107	
				3000K	55°	520	124	
				4000K	55°	500	119	
			6W	2700K	55°	625	104	
				3000K	55°	720	120	
				4000K	55°	700	117	
DLT551500A8	White bezel included	Multipack x 8	4.2W	2700K	55°	450	107	
				3000K	55°	520	124	
				4000K	55°	500	119	
			6W	2700K	55°	625	104	
				3000K	55°	720	120	
				4000K	55°	700	117	

# Bezels & converter plates

Change the look without having to change the fitting with our twist and lock bezel options. Slimline, low profile, easy to fit and change. The converter plate allows downlights to be retrofitted into locations, where downlights were previously installed.



**Twist & lock**  
interchangeable bezel

Type	Antique brass	Matt black	Brushed steel	Matt white	Gloss white	Polished gold	Silver
Round bezel							
Square bezel	-		-		-		
Converter plate	-					-	-

Product Code	Type	Finish	Cut out	Compatible with
RB359AB	Round bezel	Antique brass	-	H2 Lite CSP
RB359BLK	Round bezel	Matt black	-	H2 Lite CSP
RB359BS	Round bezel	Brushed steel	-	H2 Lite CSP
RB359MW	Round bezel	Matt white	-	H2 Lite CSP
RB359PG	Round bezel	Polished gold	-	H2 Lite CSP
RB359SIL	Round bezel	Silver	-	H2 Lite CSP
RB359WH	Round bezel	Gloss white	-	H2 Lite CSP
SQB360BLK	Square bezel	Matt black	-	H2 Lite CSP
SQB360MW	Square bezel	Matt white	-	H2 Lite CSP
SQB360PG	Square bezel	Polished gold	-	H2 Lite CSP
SQB360SIL	Square bezel	Silver	-	H2 Lite CSP
DLCONVERT70BS	Converter plate	Brushed steel	Ø63-150mm	Round bezels
DLCONVERT70MW	Converter plate	Matt white	Ø70-150mm	Round bezels
DLCVT110BLK	Converter plate	Matt black	Ø72-95mm	Round bezels
DLCVT110BS	Converter plate	Brushed steel	Ø72-95mm	Round bezels
DLCVT110MW	Converter plate	Matt white	Ø72-95mm	Round bezels
DLCVT110WH	Converter plate	Gloss white	Ø72-95mm	Round bezels



Residential  
downlights



Colour switchable  
between 2700K, 3000K  
and 4000K




PIR light for switching  
lights OFF that keep  
getting left ON



High efficacy up to  
113lm/W

Warranty	5 years
Connector	Integrated terminals, loop-in/ loop-out
IP rating	IP65 (from below) IP20 (from above)
Bathroom zone	1
Dimmable	No
Tiltable	No
CRI	CRI>80
Input	220-240V AC
SELV	Yes
Building regulations	Part B, C, E, P & L
Cut-out size	68-72
Insulation coverable	Rolled and blown insulation
Ceiling joist approved	Solid timber, I-Joist and Metal Web



# H2 Sense

Fire-rated downlight within integral PIR and switched  
live out functionality



Switch load  
Control up to 30 other  
H2 Sense products



Product code	Finish	W	CCT	Beam angle	lm	lm/W	Energy
DLSENSE	Bezel sold separately	6W	2700K	50°	600	100	
			3000K	50°	650	108	
			4000K	50°	675	113	

# Bezel & emergency options

Choose between white, black or brushed steel standard or PIR bezel with our twist and lock bezel options.



**Twist & lock**  
interchangeable bezel

DLSENBBEZ

DLSENBBEZP

DLSENSBEZ

DLSENSBEZP

DLSENWBEZ

DLSENWBEZP

Accessory on it's own



Accessory on product



Product Code	Description	Compatible with
DLSENBBEZ	H2 Sense Black Bezel	H2 Sense
DLSENBBEZP	H2 Sense Black PIR Bezel	H2 Sense
DLSENSBEZ	H2 Sense Brushed Steel Bezel	H2 Sense
DLSENSBEZP	H2 Sense Brushed Steel PIR Bezel	H2 Sense
DLSENWBEZ	H2 Sense White Bezel	H2 Sense
DLSENWBEZP	H2 Sense White PIR Bezel	H2 Sense

Product Code	Description	Compatible with
LEDEP14	Emergency Converter 2.5W for H2 Sense. Suitable for stand Alone PIR and plain bezel luminaires	H2 Sense
LEDEP15	Emergency Converter 2.5W for H2 Sense. Suitable for primary switching PIR H2 Sense luminaires only	H2 Sense

Residential  
downlights



Designed for living spaces to suit architectural decor




True low glare UGR19 as opposed to perceived low glare



Wattage Switch enables range from 550 up to 1000 lumens

Warranty	5 years
Connector	Loop in / Loop out
IP rating	IP65 (from below) IP20 (from above)
Bathroom zone	1
Dimmable	Yes (Mains)
Tilttable	No
CRI	CRI>80
Input	220-240V AC
SELV	Yes
Building regulations	Part B, C, E, P & L
Cut-out size	68-75
Insulation coverable	Rolled and blown insulation
Ceiling joist approved	Solid timber, I-Joist and Metal Web



H2 Deco CSP

Wattage & CCT Switchable Architectural Downlight



Product code	Finish	W	CCT	∠°	lm	lm/W	Energy
H2D1BLKBLK	Black Bezel	6.5W	2200K	40°	500	77	
			2700K	40°	550	85	
			3000K	40°	600	92	
			4000K	40°	650	100	
		10W	2200K	40°	650	65	
			2700K	40°	750	75	
			3000K	40°	850	85	
			4000K	40°	900	90	



# H2 Deco CSP

Wattage & CCT Switchable Architectural Downlight



Product code	Finish	W	CCT	Beam angle	lm	lm/W	Energy
H2D1BLKWHI	White Bezel	6.5W	2200K	40°	500	77	
			2700K	40°	550	85	
			3000K	40°	600	92	
			4000K	40°	650	100	
		10W	2200K	40°	650	65	
			2700K	40°	750	75	
			3000K	40°	850	85	
			4000K	40°	900	90	

## Residential downlights



Designed for living spaces to suit architectural decor




True low glare UGR19 as opposed to perceived low glare



Wattage Switch enables range from 550 up to 1000 lumens

Warranty	5 years
Connector	Loop in / Loop out
IP rating	IP65 (from below) IP20 (from above)
Bathroom zone	1
Dimmable	Yes (Mains)
Tiltable	No
CRI	CRI>80
Input	220-240V AC
SELV	Yes
Building regulations	Part B, C, E, P & L
Cut-out size	68-75
Insulation coverable	Rolled and blown insulation
Ceiling joist approved	Solid timber, I-Joist and Metal Web



Residential  
downlights



Designed for living spaces to suit architectural decor




True low glare UGR19 as opposed to perceived low glare



Wattage Switch enables range from 550 up to 1000 lumens

Warranty	5 years
Connector	Loop in / Loop out
IP rating	IP65 (from below) IP20 (from above)
Bathroom zone	1
Dimmable	Yes (Mains)
Tilttable	No
CRI	CRI>80
Input	220-240V AC
SELV	Yes
Building regulations	Part B, C, E, P & L
Cut-out size	68-75
Insulation coverable	Rolled and blown insulation
Ceiling joist approved	Solid timber, I-Joist and Metal Web



# H2 Deco CSP

Wattage & CCT Switchable Architectural Downlight



Product code	Finish	W	CCT	∠	lm	lm/W	Energy
H2D1WHIWHI	White Bezel	6.5W	2200K	40°	550	85	
			2700K	40°	600	92	
			3000K	40°	650	100	
			4000K	40°	700	108	
		10W	2200K	40°	750	75	
			2700K	40°	900	90	
			3000K	40°	950	95	
			4000K	40°	1000	100	

# H2 Pro Extreme CSP

IP65 (above+below) downlight suitable for installing outdoor in building soffits and canopies



## Residential downlights



IP65 from above  
and below for total  
protection




Suitable for use in  
coastal applications



New 2200K to minimise  
effects of blue light

Warranty	4 years
Connector	Flying lead
IP rating	IP65 (from below and above)
Bathroom zone	1 (ceiling only)
Dimmable	Yes (Mains)
Tiltable	No
CRI	CRI>80
Input	220-240V AC
SELV	Yes
Building regulations	Part C, P & L
Cut-out size	65-75
Insulation coverable	No
Ceiling joist approved	No



Product code	Finish	W	CCT	Beam angle	lm	lm/W	Energy
H2EXT1A	Anthracite grey RAL7016	5W	2200K	40°	480	96	
			2700K	40°	570	114	
			3000K	40°	560	112	
H2EXT1B	Black	5W	2200K	40°	480	96	
			2700K	40°	570	114	
			3000K	40°	560	112	
H2EXT1W	White	5W	2200K	40°	480	96	
			2700K	40°	570	114	
			3000K	40°	560	112	



# Strip lights



# Strip lights

## Standard strip range

Our standard LED strip utilises constant voltage, making it the perfect solution for shorter distances as there will be no loss of light output up to 5m.

### Choose from:

- 2 IP ratings (IP20 & IP44)
- 2 wattages (4.8W & 9.6W)
- 3 colour temperatures
- (2700K, 3000K and 4000K)
- Max run up to 5m
- Bespoke lengths, perfect for specific installations

---

## 50m reel packaging

We offer 50m reels of LED strip in an easy to dispense packaging. Simply pull out as much LED strip as the customer needs and cut at a cut-point.

We offer the 50m reel packaging with the following LED strip:

- LSV02 (IP20, 4.8W)
- LSV05 (IP20, 9.6W)



---

## Easy installation

The new LSK connector series gives an invisible and secure option to join and power strip simply using a pair of pliers, avoiding the need to solder.





## LSP strip

### High Lumen output

LSP has a nearly unprecedented lumen output of approx. 2000lm/m. This allows you to use LSP as the primary light source in a room, and as it can easily be dimmed with the correct driver, gives you full flexibility to tailor the lighting to your current need.



### 238 chips per metre

With nearly twice as many LED chips as standard LED strip, LSP gives an incredibly even light, and will appear “dotless” in most profiles, avoiding unsightly spotting.

LSP



Standard



### High efficacy

With up to 160 lumens per watt, LSP is our most efficient strip to date, and one of the best in the market. It is also fully compliant with upcoming BEIS legislation.

160lm/w


## Neon strip

### Side Vs Top bending

Side bending strip is ideal for use alongside the creation of cylindrical shapes within indoor and outdoor applications. For example, around water features, bars and columns.



Top bending strip is ideal for use in the creation of rounded corners in architectural and landscape features. Long linear light patterns in creating secondary lit effects is an effective use of top bending strip.

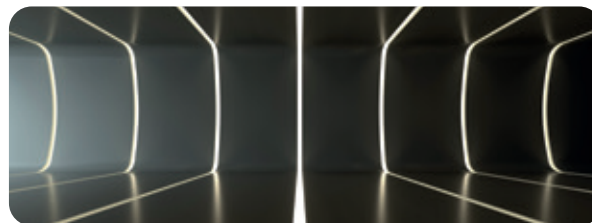

### IP67

Ideal for use in outdoor areas making it the perfect choice for landscapes and wet environments.

### IK08

We've made out neon strip durable to withstand tough environments making it perfect for use in landscapes.

## Strip lights



Bright enough to be the main, or primary, source of light




High efficiency up to 160 lumens per watt



Dotless light in profile

Guarantee	5 years
IP rating	IP20
Wattage	14W/m
CSP Switchable	Single CCT
Bespoke lengths	Yes
Maximum running length	5 m
Self-adhesive backing	Yes
Dimmable option	Driver dependent
LED lifetime	L70 54,000h
CRI	CRI>80
Input	24V DC
SDCM	SDCM4

5m/29.4mm



10mm

# LSP

LED Strip Primary, 14W/m, IP20, 5m

Use  
in Drop  
Ceilings



Product code	Reel length	W	CCT	∠	lm	lm/W	lx at 1m	Energy
LSP195027	5m reel	14W/m	2700K	120°	1960	140	651	
LSP205030	5m reel	14W/m	3000K	120°	2000	143	664	
LSP225040	5m reel	14W/m	4000K	120°	2240	160	744	

\*Drivers sold separately

Product code	Driver installation
PSMDIP10024	Mains dimmable up to 5mtrs
PSIP15024	On/off up to 10mtrs
PSIP25024	Dimmable with PDCINT1-10v up to 15mtrs





## Strip lights



**Ideal for accent lighting with 4.8W/m**



**Ideal for living room and hallways with IP20 rating**



**Bespoke lengths available**

Guarantee	3 years
IP rating	IP20
Wattage	4.8W/m
CSP Switchable	Single CCT
Bespoke lengths	Yes
Maximum running length	5 m
Self-adhesive backing	Yes
Dimmable option	Driver dependent
LED lifetime	L70 30,000h
CRI	CRI>80
Input	24V DC
SDCM	SDCM5

5m/100mm



8mm

# LSV02

Constant voltage, self-adhesive, flexible IP20 strip

**Use**  
in  
Coving



Product code	Reel length	W	CCT	∠	lm	lm/W	lx at 1m	Energy
LSV0227050	5m reel	4.8W/m	2700K	120°	450	94	151	
LSV0227500	50m reel	4.8W/m	2700K	120°	450	94	151	
LSV0230050	5m reel	4.8W/m	3000K	120°	460	96	154	
LSV0230500	50m reel	4.8W/m	3000K	120°	460	96	154	
LSV0240050	5m reel	4.8W/m	4000K	120°	520	108	175	
LSV0240500	50m reel	4.8W/m	4000K	120°	520	108	175	

\*Drivers sold separately

Product code	Driver installation
PSMD3024	Mains dimmable up to 5mtrs
LSD6024	On/off up to 10mtrs in parallel
PSMDIP10024	Dimmable with PDCINT1-10V up to 15mtrs

# LSV05

Constant voltage, self-adhesive, flexible IP20 strip



Product code	Reel length	W	CCT	∠°	lm	lm/W	lx at 1m	Energy
LSV0527050	5m reel	9.6W/m	2700K	120°	900	94	302	
LSV0527500	50m reel	9.6W/m	2700K	120°	900	94	302	
LSV0530050	5m reel	9.6W/m	3000K	120°	930	97	312	
LSV0530500	50m reel	9.6W/m	3000K	120°	930	97	312	
LSV0540050	5m reel	9.6W/m	4000K	120°	1040	108	349	
LSV0540500	50m reel	9.6W/m	4000K	120°	1040	108	349	

\*Drivers sold seperately


Product code	Driver installation
LSD6024	On/off up to 5mtrs
PSMDIP10024	Mains dimmable up to 10mtrs
PSIP25024	Dimmable with PDCINTI-10V up to 20mtrs

## Strip lights

- 9.6W/m** Ideal for atmospheric lighting with 9.6W/m
- IP20** Ideal for living room and hallways with IP20 rating
- BESPOKE** Bespoke lengths available

Guarantee	3 years
IP rating	IP20
Wattage	9.6W/m
CSP Switchable	Single CCT
Bespoke lengths	Yes
Maximum running length	5 m
Self-adhesive backing	Yes
Dimmable option	Driver dependent
LED lifetime	L70 30,000h
CRI	CRI>80
Input	24V DC
SDCM	SDCM5

5m/50mm



## Strip lights

4.8W/m

Ideal for accent lighting with 4.8W/m

IP44


Ideal for kitchen and bathroom with IP44 rating

BESPOKE

Bespoke lengths available

Guarantee	3 years
IP rating	IP44
Wattage	4.8W/m
CSP Switchable	Single CCT
Bespoke lengths	Yes
Maximum running length	5 m
Self-adhesive backing	Yes
Dimmable option	Driver dependent
LED lifetime	L70 30,000h
CRI	CRI>80
Input	24V DC
SDCM	SDCM5

5m/100mm



8mm

# LSV42

Constant voltage, self-adhesive, flexible IP44 strip

Use  
in  
Kitchen



Product code	Reel length	W	CCT	△	Im	Im/W	lx at 1m	Energy
LSV4227050	5m reel	4.8W/m	2700K	120°	410	86	129	
LSV4230050	5m reel	4.8W/m	3000K	120°	425	89	134	
LSV4240050	5m reel	4.8W/m	4000K	120°	480	100	151	

\*Drivers sold separately

Product code	Driver installation
PSMD3024	Mains dimmable up to 5mtrs
LSD6024	On/off up to 10mtrs In parallel
PSMDIP10024	Mains dimmable up to 20mtrs



# Build your LSV product code

## Bespoke lengths

Use the matrix below to build the product code for your LED strip.

1	2	3	4	5	6
<b>L S</b>	<b>V</b>	<b>0</b>	<b>2</b>	<b>2 7</b>	<b>0 1 0</b>
		4	5	3 0	0 2 0
				4 0	0 3 0
					0 4 0
					0 5 0

### 1 Product

**LS** LED strip

### 2 Strip type

**V** Constant voltage  
(Up to 5m lengths)

### 3 IP rating

**0** IP20  
**4** IP44

### 4 Wattage

**2** 4.8W  
**5** 9.6W

### 5 Colour temperature

**27** 2700K  
**30** 3000K  
**40** 4000K

### 6 Length

**010** 1m  
**020** 2m  
**030** 3m  
**:** ...  
**050** 5m

## Strip lights



**Ideal for accent lighting with 6.5W/m**




**Ideal for wet environments with IP67 rating**



**Side bending strip**

Guarantee	5 years
IP rating	IP67
Wattage	6.5W/m
CSP Switchable	Single CCT
Bespoke lengths	No
Maximum running length	10 m
Self-adhesive backing	No
Dimmable option	Driver dependent
LED lifetime	L70 60,000h
CRI	CRI>80
Input	24V DC
SDCM	SDCM3
Electric class	3

3m,5m,10m/50mm



# LSNS73

6.5 W/m, IP67, 24V constant voltage, side bend, waterproof flexible neon strip

**Use**  
Outdoors



Product code	Reel length	W	CCT	∠	lm	lm/W	lx at 1m	Energy
LSNS7327030	3m reel	6.5W/m	2700K	120°	290	45	79	
LSNS7327050	5m reel	6.5W/m	2700K	120°	290	45	79	
LSNS7327100	10m reel	6.5W/m	2700K	120°	290	45	79	
LSNS7330030	3m reel	6.5W/m	3000K	120°	310	47	82	
LSNS7330050	5m reel	6.5W/m	3000K	120°	310	47	82	
LSNS7330100	10m reel	6.5W/m	3000K	120°	310	47	82	
LSNS7340030	3m reel	6.5W/m	4000K	120°	315	48	85	
LSNS7340050	5m reel	6.5W/m	4000K	120°	315	48	85	
LSNS7340100	10m reel	6.5W/m	4000K	120°	315	48	85	

# LSNS75

9.6 W/m, IP67, 24V constant voltage, side bend, waterproof flexible neon strip




Product code	Reel length	W	CCT	∠	lm	lm/W	lx at 1m	Energy
LSNS7527030	3m reel	9.6W/m	2700K	120°	450	47	131	
LSNS7527050	5m reel	9.6W/m	2700K	120°	450	47	131	
LSNS7530030	3m reel	9.6W/m	3000K	120°	460	48	135	
LSNS7530050	5m reel	9.6W/m	3000K	120°	460	48	135	
LSNS7540030	3m reel	9.6W/m	4000K	120°	470	49	137	
LSNS7540050	5m reel	9.6W/m	4000K	120°	470	49	137	

## Strip lights

- Ideal for atmospheric light with 9.6W/m
- Ideal for wet environments with IP67 rating
- Side bending strip

Guarantee	5 years
IP rating	IP67
Wattage	9.6W/m
CSP Switchable	Single CCT
Bespoke lengths	No
Maximum running length	5 m
Self-adhesive backing	No
Dimmable option	Driver dependent
LED lifetime	L70 60,000h
CRI	CRI>80
Input	24V DC
SDCM	SDCM3
Electric class	3

3m,5m/50mm



## Strip lights



**Ideal for accent lighting with 6.5W/m**




**Ideal for wet environments with IP67 rating**



**Top bending strip**

<b>Guarantee</b>	5 years
<b>IP rating</b>	IP67
<b>Wattage</b>	6.5W/m
<b>CSP Switchable</b>	Single CCT
<b>Bespoke lengths</b>	No
<b>Maximum running length</b>	10 m
<b>Self-adhesive backing</b>	No
<b>Dimmable option</b>	Driver dependent
<b>LED lifetime</b>	L70 60,000h
<b>CRI</b>	CRI>80
<b>Input</b>	24V DC
<b>SDCM</b>	SDCM3
<b>Electric class</b>	3

3m,5m,10m/50mm



# LSNT73

6.5 W/m, IP67, 24V constant voltage, top bend, waterproof flexible neon strip

**Use**  
Outdoors



Product code	Reel length	W	CCT	∠	lm	lm/W	lx at 1m	Energy
LSNT7327030	3m reel	6.5W/m	2700K	120°	510	78	152	
LSNT7327050	5m reel	6.5W/m	2700K	120°	510	78	152	
LSNT7327100	10m reel	6.5W/m	2700K	120°	510	78	152	
LSNT7330030	3m reel	6.5W/m	3000K	120°	520	80	156	
LSNT7330050	5m reel	6.5W/m	3000K	120°	520	80	156	
LSNT7330100	10m reel	6.5W/m	3000K	120°	520	80	156	
LSNT7340030	3m reel	6.5W/m	4000K	120°	530	81	159	
LSNT7340050	5m reel	6.5W/m	4000K	120°	530	81	159	
LSNT7340100	10m reel	6.5W/m	4000K	120°	530	81	159	



# LSNT75

9.6 W/m, IP67, 24V constant voltage, top bend, waterproof flexible neon strip




Product code	Reel length	W	CCT	∠	lm	lm/W	lx at 1m	Energy
LSNT7527030	3m reel	9.6W/m	2700K	120°	770	80	224	
LSNT7527050	5m reel	9.6W/m	2700K	120°	770	80	224	
LSNT7530030	3m reel	9.6W/m	3000K	120°	780	81	227	
LSNT7530050	5m reel	9.6W/m	3000K	120°	780	81	227	
LSNT7540030	3m reel	9.6W/m	4000K	120°	792	82	230	
LSNT7540050	5m reel	9.6W/m	4000K	120°	792	82	230	

## Strip lights

- Ideal for atmospheric light with 9.6W/m
- Ideal for wet environments with IP67 rating
- Top bending strip

Guarantee	5 years
IP rating	IP67
Wattage	9.6W/m
CSP Switchable	Single CCT
Bespoke lengths	No
Maximum running length	5 m
Self-adhesive backing	No
Dimmable option	Driver dependent
LED lifetime	L70 60,000h
CRI	CRI>80
Input	24V DC
SDCM	SDCM3
Electric class	3

3m,5m/50mm



# Drivers







## Choose the ideal driver

Use the matrix to find the perfect driver for your LED strip

Driver information	PS1524	PS3024B	PSMD3024	LSD6024	PS7524	LSD12024
Driver						
Wattage	15W	30W	30W	60W	75W	120W
IP Rating	IP20	IP20	IP20	IP20	IP20	IP20
Dimmable	1-10V*	1-10V*	Mains	1-10V*	1-10V*	1-10V*

Strip	Maximum strip length per driver					
LSP	≤ 1m	≤ 2.1m	≤ 1.3 - 2.1m	≤ 4.2m	≤ 5.3m	≤ 8.5m
LSV02	≤ 3.1m	≤ 6.2m	≤ 3.8 - 6.2m	≤ 12.5m	≤ 15.6m	≤ 25m
LSV05	≤ 1.5m	≤ 3.1m	≤ 1.9 - 3.1m	≤ 6.2m	≤ 7.8m	≤ 12.5m
LSV42	≤ 3.1m	≤ 6.2m	≤ 3.8 - 6.2m	≤ 12.5m	≤ 15.6m	≤ 25m
LSNS73	≤ 2.3m	≤ 4.6m	≤ 2.8 - 4.6m	≤ 9.2m	≤ 11.5m	≤ 8.5m
LSNS75	≤ 1.5m	≤ 3.1m	≤ 1.9 - 3.1m	≤ 6.2m	≤ 7.8m	≤ 25m
LSNT73	≤ 2.3m	≤ 4.6m	≤ 2.8 - 4.6m	≤ 9.2m	≤ 11.5m	≤ 12.5m
LSNT75	≤ 1.5m	≤ 3.1m	≤ 1.9 - 3.1m	≤ 6.2m	≤ 7.8m	≤ 25m

\* Requires a **PDCINT1-10V** interface to make it 1 - 10V dimmable

PSDIP6024	PSDIP10024	PSMDIP10024	PSDAL20024	PSIP15024	PSIP25024
					
60W	100W	100W	200W	150W	250W
IP66	IP66	IP66	IP66	IP67	IP67
1-10V	1-10V	Mains	DALI	1-10V*	1-10V*
≤ 4.2m	≤ 7.1m	≤ 7.1m	≤ 14.2m	≤ 10.7m	≤ 17.8m
≤ 12.5m	≤ 20.8m	≤ 20.8m	≤ 20.8m	≤ 15.6m	≤ 26m
≤ 6.2m	≤ 10.4m	≤ 10.4m	≤ 41.6m	≤ 31.2m	≤ 52m
≤ 12.5m	≤ 20.8m	≤ 20.8m	≤ 20.8m	≤ 15.6m	≤ 26m
≤ 9.2m	≤ 15.3m	≤ 15.3m	≤ 30.7m	≤ 23m	≤ 38.4m
≤ 6.2m	≤ 10.4m	≤ 10.4m	≤ 20.8m	≤ 15.6m	≤ 26m
≤ 9.2m	≤ 15.3m	≤ 15.3m	≤ 30.7m	≤ 23m	≤ 38.4m
≤ 6.2m	≤ 10.4m	≤ 10.4m	≤ 20.8m	≤ 15.6m	≤ 26m

For full product specification visit [collingwoodlighting.com](http://collingwoodlighting.com)

# Connector & profile accessories

Find the ideal connectors for your strip











Use the matrix to find the perfect connectors for your LED strip

## Strip to strip

Strip to strip connectors connect one end of the strip directly to another end of strip creating an almost seamless transition from one piece of strip to the next.

## Strip to strip with fly-leads

Connect one piece of strip to another with the flexibility of having fly-leads between them.

	LSK2208SS	LSK2208SD	LSK2208FB	LSK2208LB	LSK2210SS	LSK2210SD	LSK2210FB	LSK2210LB	LSNS1217B2P	LSNS1217E2P
Connector information										
Type	Strip to strip	Strip to driver	Flex bend	L bend	Strip to strip	Strip to driver	Flex bend	L bend	150mm fly-lead at bottom	150mm fly-lead at end
										
Flexible tape - Constant voltage										
LSV02	•	•	•	•						
LSV05	•	•	•	•						
LSV42										
Dotless										
LSP					•	•	•	•		
Neon strip										
LSNS73									•	•
LSNS75									•	•
LSNT73										
LSNT75										



## Fly-leads

Use a connector that adds fly-leads to your strip to connect your strip to a power supply.

## End cap

This is needed at the end of neon strip to complete the circuit.

## L bend

Perfect for connecting strip directly to strip on a corner.

LSNS1217L2P

LSNS1217R2P

LSNS1217SSF

LSNS1217SS

LSNS1217EC

LSNT1312B2P

LSNT1312E2P

LSNT1312L2P

LSNT1312R2P

LSNT1312SSF

LSNT1312SS

LSNT1312EC

150mm  
fly-lead  
at left150mm fly-lead  
at rightStrip to strip  
150mm  
fly-lead

Strip to strip



End cap

150mm  
fly-lead  
at bottom150mm  
fly-lead  
at end150mm  
fly-lead  
at left150mm  
fly-lead  
at rightStrip to strip  
150mm  
fly-lead

Strip to strip



End cap










For full product specification visit [collingwoodlighting.com](http://collingwoodlighting.com)

# Connector & profile accessories

## Easily install strip anywhere

Use the matrix to find the perfect profiles for your LED strip

	RP7010	RP7020	RP28010	RP28020	SM7010	SM7020	SM28010	SM28020	LSPLA21314
Connector information									
Mount	Recessed	Recessed	Recessed	Recessed	Surface mount	Surface mount	Surface mount	Surface mount	Plaster-in
Type	Straight	Straight	Straight	Straight	Straight	Straight	Straight	Straight	Straight
Depth	7mm	7mm	28mm	28mm	7mm	7mm	28mm	28mm	10mm
Length	1m	2m	1m	2m	1m	2m	1m	2m	2m
									
Flexible tape - Constant voltage									
LSV02	•	•	•	•	•	•	•	•	
LSV05	•	•	•	•	•	•	•	•	
LSV42	•	•	•	•	•	•	•	•	
Dotless									
LSP	•	•	•	•	•	•	•	•	•
Neon strip									
LSNS73									
LSNS75									
LSNT73									
LSNT75									

[illegible]

For full product specification visit [collingwoodlighting.com](http://collingwoodlighting.com)

# Wall lights





Wall lights

# Wall lights



11W




Integral bracket for easy installation



IP54 ideal for framing doorways and entrances

Guarantee	5 years
IP rating	IP54
Wattage	11.0W
CSP Switchable	Single CCT
Dimmable	No
LED lifetime	L70 30,000h
CRI	CRI>80
Input	220-240V AC
Electric class	1



# WL012

Diffused window design



Product code	Finish	W	CCT	∠°	lm	lm/W	lx at 1m	Energy
WL012G30	Grey RAL7022	11.0W	3000K	338°	610	55	72	
WL012X30	Black RAL9011	11.0W	3000K	338°	610	55	72	

# WL013

Creates shadow effects



Product code	Finish	W	CCT	∠°	lm	lm/W	lx at 1m	Energy
WL013G30	Grey RAL7022	6.5W	3000K	107°/91°	390	60	99	
WL013X30	Black RAL9011	6.5W	3000K	107°/91°	390	60	99	

## Wall lights



6.5W




Integral bracket for easy installation



IP65 ideal for outdoor environments

Guarantee	5 years
IP rating	IP65
Wattage	6.5W
CSP Switchable	Single CCT
Dimmable	No
LED lifetime	L70 30,000h
CRI	CRI>80
Input	220-240V AC
Electric class	1



# Wall lights



5.7W




Integral bracket for easy installation



IP54 ideal for framing doorways and entrances

Guarantee	5 years
IP rating	IP54
Wattage	5.7W
CSP Switchable	Single CCT
Dimmable	No
LED lifetime	L70 30,000h
CRI	CRI>80
Input	220-240V AC
Electric class	1



# WL014

Decorative lit effect



Product code	Finish	W	CCT	∠°	lm	lm/W	lx at 1m	Energy
WL014G30	Grey RAL7022	5.7W	3000K	22°/26°	350	61	1061	
WL014X30	Black RAL9011	5.7W	3000K	22°/26°	350	61	1061	



# WL015

Powerful illumination



Product code	Finish	W	CCT	∠°	lm	lm/W	lx at 1m	Energy
WL015G30	Grey RAL7022	13.0W	3000K	88°	1000	77	362	
WL015X30	Black RAL9011	13.0W	3000K	88°	1000	77	362	

## Wall lights



13W



Integral bracket for easy installation




IP65 ideal for outdoor environments

Guarantee	5 years
IP rating	IP65
Wattage	13.0W
CSP Switchable	Single CCT
Dimmable	No
LED lifetime	L70 30,000h
CRI	CRI>80
Input	220-240V AC
Electric class	1

100mm

65mm



160mm

Wall lights



2.6W




Coastal protected



IP65 ideal for outdoor environments

Guarantee	7 years
IP rating	IP65
Wattage	2.6W
CSP Switchable	Single CCT
Dimmable	No
LED lifetime	L70 70,000h
CRI	CRI>80
Input	220-240V AC
Electric class	1



WL060 | WL160

Straight to mains LED halo / flood wall light



Product code	Finish	W	CCT	⤴	lm	lm/W	lx at 1m	Energy
WL060 NW	Silver	2.6W	4000K	120°	82	32	46	
WL060 WW	Silver	2.6W	3000K	120°	58	22	26	
WL160 27	Black	2.6W	2700K	120°	56	22	25	
WL160 NW	Black	2.6W	4000K	120°	82	32	46	
WL160 WW	Black	2.6W	3000K	120°	58	22	26	



ANCE

# Residential floodlights





# Residential floodlights

## Quick & easy installation bracket

### Circular first fix bracket

The circular bracket is detachable and can be mounted to the surface before the rest of the product, allowing for a remarkably easy installation. The product is then simply bolted on to the bracket and the installation completed.

#### Advantages

- Quick & easy installation.
- This bracket is for first fixing onto the wall, and because it's circular, there is no need for spirit level.
- 360° rotation, allowing the floodlight to be installed in a variety of applications.
- Pre-wired with 1m cable.



## 360° rotatable and 180° tiltable

### Flexibility and reliability

Combining 360° rotation and 180° tilt, this light can be pointed in any direction, ensuring you can illuminate a space from any position.

#### 360° rotation


The product has a circular bracket at the end which allows it to be rotated in any direction. Once installed onto a wall, the light can be pointed in any direction with ease.

#### 180° tiltable

The bracket directly attached to the floodlight allows the product to tilt both upwards and downwards.

#### Advantages

- Illuminate space from any direction.
- Can adjust into correct area after it's installed.

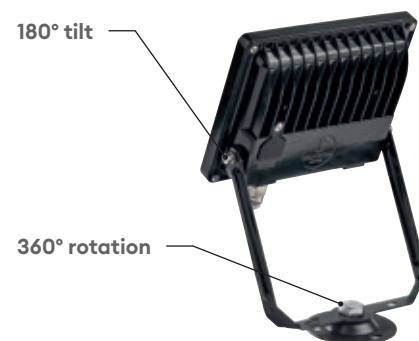

## CCT switchable

### One light, three colour temperatures

Our range of colour switchable floodlights allows you to stock 3 colour temperatures in 1 product (3000K, 4000K & 6500K).

#### Advantages

- Simpler product range.
- Products can be easily adjusted after they are installed thanks to a convenient IP65 switch on the back.
- Always have the correct product on hand.


#### 3000K



#### 4000K



#### 6500K

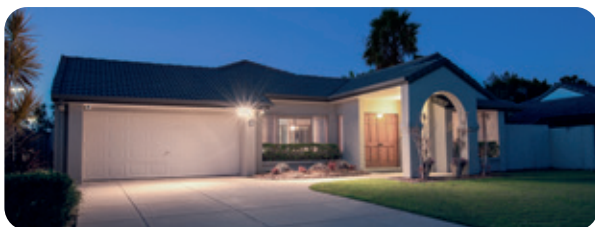

## IP65 directional PIR sensor

### PIR sensor: Passive infrared sensor

The IP65 rating provides optimum protection against the impacts of rainwater and general adverse weather conditions. The PIR sensor can rotate, meaning that the activation can occur in a different area to where the floodlight illuminates. For example, the sensor could be pointed to a door so that when a person exits the building a separate walkway is illuminated, increasing safety.

#### Advantages

- IP65 rated sensor ideal for adverse weather conditions.
- Sensor rotates allowing the activation to occur in a different area to the illumination.
- Easily adjust motion sensitivity, lux levels and time required on the sensor.
- Save your customer energy and money.



## Coastal protection

### Rust & salt mist protection

With corrosion resistant protection and coastal protective paint, our floodlights are perfect for use in coastal areas.

#### Advantages

- Feel confident you can install these floodlights anywhere.
- Can be installed into coastal areas without any worry of products failing.



# Floodlights



High efficacy of up to 130lm/W




First fix bracket for quick & easy installation



Ideal for coastal areas

Guarantee	5 years
Wattage	10W
IP rating	IP65
IK rating	IK07
Tiltable	180°
Rotatable	360°
Dimmable	No
Input	220-240V AC
LED lifetime	L70 50,000h
Connector	Flying lead
Ambient temperature	-40°C - 40°C
Electric class	1

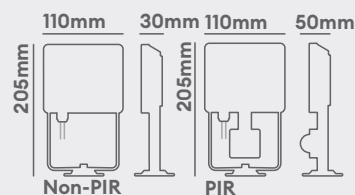

## FL01

10W colour switchable floodlight suitable for 6.5m height



**3 in 1**  
stock less & sell more

Product code	Finish	Type	W	CCT	∠	Im	lm/W	lx at 1m	Energy
FL01APCS	Anthracite grey RAL7016	PIR sensor	10W	3000K	120°	1100	110	419	
				4000K	120°	1150	115	502	
				6500K	120°	1300	130	461	
FL01AXCS	Anthracite grey RAL7016	Standard	10W	3000K	120°	1100	110	419	
				4000K	120°	1150	115	502	
				6500K	120°	1300	130	461	
FL01BPCS	Black	PIR sensor	10W	3000K	120°	1100	110	419	
				4000K	120°	1150	115	502	
				6500K	120°	1300	130	461	
FL01BXCS	Black	Standard	10W	3000K	120°	1100	110	419	
				4000K	120°	1150	115	502	
				6500K	120°	1300	130	461	
FL01WPCS	White RAL9016	PIR sensor	10W	3000K	120°	1100	110	419	
				4000K	120°	1150	115	502	
				6500K	120°	1300	130	461	
FL01WXCS	White RAL9016	Standard	10W	3000K	120°	1100	110	419	
				4000K	120°	1150	115	502	
				6500K	120°	1300	130	461	

# FL02

20W colour switchable floodlight suitable for 9m height




Product code	Finish	Type	W	CCT	Beam angle	Im	lm/W	lx at 1m	Energy
FL02APCS	Anthracite grey RAL7016	PIR sensor	20W	3000K	120°	2200	110	832	
				4000K	120°	2400	120	1040	
				6500K	120°	2400	120	999	
FL02AXCS	Anthracite grey RAL7016	Standard	20W	3000K	120°	2200	110	832	
				4000K	120°	2400	120	1040	
				6500K	120°	2400	120	999	
FL02BPCS	Black	PIR sensor	20W	3000K	120°	2200	110	832	
				4000K	120°	2400	120	1040	
				6500K	120°	2400	120	999	
FL02BXCS	Black	Standard	20W	3000K	120°	2200	110	832	
				4000K	120°	2400	120	1040	
				6500K	120°	2400	120	999	
FL02WPCS	White RAL9016	PIR sensor	20W	3000K	120°	2200	110	832	
				4000K	120°	2400	120	1040	
				6500K	120°	2400	120	999	
FL02WXCS	White RAL9016	Standard	20W	3000K	120°	2200	110	832	
				4000K	120°	2400	120	1040	
				6500K	120°	2400	120	999	

## Floodlights

- High efficacy of up to 120lm/W
- First fix bracket for quick & easy installation
- Ideal for coastal areas

Guarantee	5 years
Wattage	20W
IP rating	IP65
IK rating	IK07
Tilttable	180°
Rotatable	360°
Dimmable	No
Input	220-240V AC
LED lifetime	L70 50,000h
Connector	Flying lead
Ambient temperature	-40°C - 40°C
Electric class	1

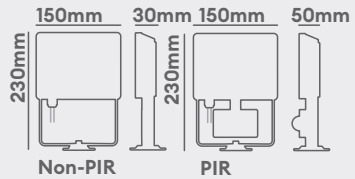

## Floodlights



High efficacy of up to  
130lm/W




First fix bracket for quick  
& easy installation



Ideal for coastal areas

Guarantee	5 years
Wattage	30W
IP rating	IP65
IK rating	IK07
Tiltable	180°
Rotatable	360°
Dimmable	No
Input	220-240V AC
LED lifetime	L70 50,000h
Connector	Flying lead
Ambient temperature	-40°C - 40°C
Electric class	1

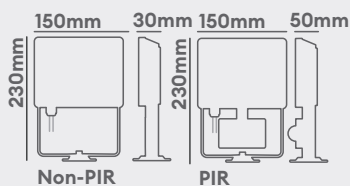

# FL03

30W colour switchable floodlight suitable for 11m height



**3 in 1**

stock less &  
sell more

Product code	Finish	Type	W	CCT	Beam angle	Im	lm/W	lx at 1m	Energy
FL03APCS	Anthracite grey RAL7016	PIR sensor	30W	3000K	120°	3000	100	1242	
				4000K	120°	3300	110	1448	
				6500K	120°	3900	130	1407	
FL03AXCS	Anthracite grey RAL7016	Standard	30W	3000K	120°	3000	100	1242	
				4000K	120°	3300	110	1448	
				6500K	120°	3900	130	1407	
FL03BPCS	Black	PIR sensor	30W	3000K	120°	3000	100	1242	
				4000K	120°	3300	110	1448	
				6500K	120°	3900	130	1407	
FL03BXCS	Black	Standard	30W	3000K	120°	3000	100	1242	
				4000K	120°	3300	110	1448	
				6500K	120°	3900	130	1407	
FL03WPCS	White RAL9016	PIR sensor	30W	3000K	120°	3000	100	1242	
				4000K	120°	3300	110	1448	
				6500K	120°	3900	130	1407	
FL03WXCS	White RAL9016	Standard	30W	3000K	120°	3000	100	1242	
				4000K	120°	3300	110	1448	
				6500K	120°	3900	130	1407	



# FL05

50W colour switchable floodlight suitable for 15m height



Product code	Finish	Type	W	CCT	∠	lm	lm/W	lx at 1m	Energy
FL05APCS	Anthracite grey RAL7016	PIR sensor	50W	3000K	120°	5000	100	2230	
				4000K	120°	5600	112	2449	
				6500K	120°	5100	102	2230	
FL05AXCS	Anthracite grey RAL7016	Standard	50W	3000K	120°	5000	100	2230	
				4000K	120°	5600	112	2449	
				6500K	120°	5100	102	2230	
FL05BPCS	Black	PIR sensor	50W	3000K	120°	5000	100	2230	
				4000K	120°	5600	112	2449	
				6500K	120°	5100	102	2230	
FL05BXCS	Black	Standard	50W	3000K	120°	5000	100	2230	
				4000K	120°	5600	112	2449	
				6500K	120°	5100	102	2230	
FL05WPCS	White RAL9016	PIR sensor	50W	3000K	120°	5000	100	2230	
				4000K	120°	5600	112	2449	
				6500K	120°	5100	102	2230	
FL05WXCS	White RAL9016	Standard	50W	3000K	120°	5000	100	2230	
				4000K	120°	5600	112	2449	
				6500K	120°	5100	102	2230	

## Floodlights



High efficacy of up to 112lm/W




First fix bracket for quick & easy installation



Ideal for coastal areas

Guarantee	5 years
Wattage	50W
IP rating	IP65
IK rating	IK07
Tilttable	180°
Rotatable	360°
Dimmable	No
Input	220-240V AC
LED lifetime	L70 50,000h
Connector	Flying lead
Ambient temperature	-40°C - 40°C
Electric class	1

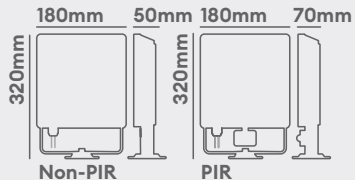

# Floodlights



High efficacy of up to 118lm/W




First fix bracket for quick & easy installation



Ideal for coastal areas

Guarantee	5 years
Wattage	100W
IP rating	IP65
IK rating	IK07
Tiltable	180°
Rotatable	360°
Dimmable	No
Input	220-240V AC
LED lifetime	L70 50,000h
Connector	Flying lead
Ambient temperature	-40°C - 40°C
Electric class	1



# FL10

100W colour switchable floodlight suitable for 20m height



3 in 1  
stock less & sell more



Easy install bracket  
Install the bracket first and then attach the floodlight

Product code	Finish	Type	W	CCT	∠°	lm	lm/W	lx at 1m	Energy
FL10BXCS	Black	Standard	100W	3000K	120°	10250	103	4275	
				4000K	120°	11810	118	4926	
				6500K	120°	10970	110	4575	



# Panels





## Panels



**UGR16** for office,  
classroom and retail  
application



**Wattage switchable**  
between 22W, 24W, 25W  
& 27W



**Energy efficient up to**  
164 Llm/W

<b>Guarantee</b>	5 years (product), 3 years (emg battery), 2 years (on-site)
<b>Wattage</b>	22W - 24W - 25W - 27W
<b>IP rating</b>	IP40
<b>Dimmable</b>	No
<b>UGR</b>	16
<b>TP rating</b>	TP(a)
<b>Input</b>	220-240V AC
<b>Emergency version available</b>	Yes, using converter
<b>Connector</b>	2 part first fit connector
<b>Electric class</b>	2



# Domino Black

Ultra-low Glare 600x600 Architectural Panel

**2 year**  
on site  
guarantee



Product code	Dimming	Driver required	UGR	W	CCT	△	lm	lm/W	Energy
DMB66N4K	Non-Dimmable	Driver included with lumen output switch	16	22W	4000K	75°	3550	161	
				24W	4000K	75°	3850	160	
				25W	4000K	75°	4100	164	
				27W	4000K	75°	4350	161	
DMB66X4K	Dimmable	Use driver PS6501100MA	16	27W	4000K	75°	4350	161	

\*Emergency packs sold separately

Product code	Description
LEDEP10EM	Emergency pack for converting panels into emergency manual-test option
LEDEP10	Emergency pack for converting panels into emergency self or manual test option

# Domino White

Ultra-low Glare 600x600 Architectural Panel

2 year  
on site  
guarantee



Product code	Dimming	Driver required	UGR	W	CCT	Beam angle	lm	lm/W	Energy
DMW66N4K	Non-Dimmable	Driver included with lumen output switch	16	22W	4000K	75°	3550	161	
				24W	4000K	75°	3850	160	
				25W	4000K	75°	4100	164	
				27W	4000K	75°	4350	161	
DMW66X4K	Dimmable	Use driver PS6501100MA	16	27W	4000K	75°	4350	161	

\*Emergency packs sold separately

Product code	Description
LEDEP10EM	Emergency pack for converting panels into emergency manual-test option
LEDEP10	Emergency pack for converting panels into emergency self or manual test option

## Panels



UGR16 for office, classroom and retail application




Wattage switchable between 22W, 24W, 25W & 27W



Energy efficient up to 164 Lm/W

Guarantee	5 years (product), 3 years (emg battery), 2 years (on-site)
Wattage	22W - 24W - 25W - 27W
IP rating	IP40
Dimmable	No
UGR	16
TP rating	TP(a)
Input	220-240V AC
Emergency version available	Yes, using converter
Connector	2 part first fit connector
Electric class	2



## Panels



UGR19



Wattage switchable from 13W to 26W



Ultra-efficient up to 156 Lm/W

Guarantee	5 years (product), 3 years (emg battery), 2 years (on-site)
Wattage	13 - 26W
IP rating	IP20
Dimmable	Yes (DALI-2, PUSH-DIM)
UGR	19
TP rating	TP(a)
Input	220-240V AC
Emergency version available	Manual, Self & DALI-2 options
Connector	Easy-fit connector
Electric class	2

595mm




40mm



# Trinity Versa 600x600

Direct/Indirect UGR19 Recessed Modular

2 year  
on site  
guarantee

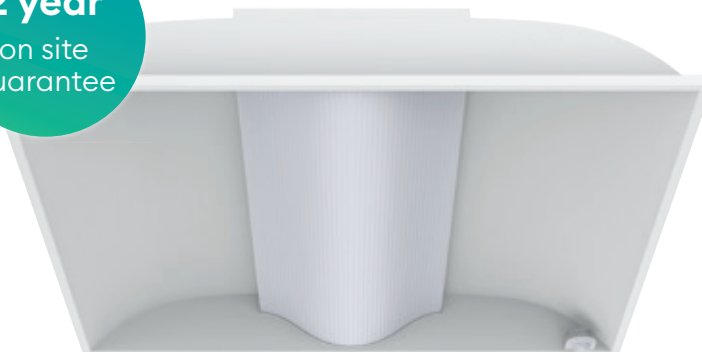

Product code	Dimming	Driver required	UGR	W	CCT	△°	lm	lm/W	Energy
TRI66N40	On-Off	Mains	19	13W	4000K	80°	1900	146	
				16W	4000K	80°	2500	156	
				18W	4000K	80°	2800	156	
				20W	4000K	80°	3100	155	
				26W	4000K	80°	3700	142	
TRI66X40	Driverless	Select Driver	19	13W	4000K	80°	1900	146	
				16W	4000K	80°	2500	156	
				18W	4000K	80°	2700	156	
				20W	4000K	80°	3100	155	
				26W	4000K	80°	3900	142	

\*Emergency packs sold separately

Product code	Description
LEDEP10EM	Emergency pack for converting panels into emergency manual-test option
LEDEP10	Emergency pack for converting panels into emergency self or manual test option
LEDEP09DA	Emergency pack for converting panel into DALI emergency self-test option

# Trinity Versa accessories

## Meet your project requirements

Optional PIR sensor, driver and emergency accessories combine excellence and unrivalled cost savings. The emergency pack turns your Trinity Versa into an emergency version.

### Use the tables below to choose the perfect kit for your installation

	TRIONOFFPIR	TRISDIMPIR	TRISDIMDRV	TRIREMOTE	TRIDALIPIR	TRIDALIDRV	TRIKITPUL
Accessory on it's own							
Accessory on product			-	-		-	

Product Code	Type	Compatible with
TRIONOFFPIR	On/Off PIR sensor (adjustable time delay, sensitivity, day light switching)	Trinity Versa
TRISDIMPIR	Step-dim PIR sensor (to 10% or 30% when absence is detected, adjustable time delay, sensitivity, day light switching)	Trinity Versa
TRISDIMDRV	Step-dim plug-in driver (using PWM output)	Trinity Versa
TRIREMOTE	Remote controller (for use with <b>TRIONOFFPIR</b> & <b>TRISDIMPIR</b> ) (Requires 2 x AAA batteries, not included)	Trinity Versa
TRIDALIPIR	DALI-2 PIR sensor (head-end control required)	Trinity Versa
TRIDALIDRV	DALI-2/PUSH-DIM/0-10V plug-in driver	Trinity Versa
TRIKITPUL	Pull-up mounting kit for concealed ceiling grids	Trinity Versa
LEDEP09DA	Emergency pack for converting panel into DALI emergency self-test option	Trinity Versa
LEDEP10	Emergency pack for converting panels into emergency self-test & manual test switchable option	Trinity Versa
LEDEP10EM	Emergency pack for converting panels into emergency manual-test option	Trinity Versa

## Panels



**Low UGR with UGR19 available**



**Wattage switchable between 22W, 24W, 26W & 28W**





**Energy rating B up to 160 Lm/W**

<b>Guarantee</b>	5 years (product), 3 years (emerg battery), 2 years (on-site)
<b>Wattage</b>	22W - 24W - 26W - 28W or 28W
<b>IP rating</b>	IP44
<b>Dimmable</b>	Yes (DALI-2, 0-10V, PUSH-DIM)
<b>UGR</b>	19
<b>TP rating</b>	TP(a)
<b>Input</b>	220-240V AC
<b>Emergency version available</b>	Yes, using converter
<b>Connector</b>	Integrated terminals, loop-in/loop-out
<b>Electric class</b>	2

595mm

32mm



# Solis Pro 600x600

Highly Efficient 160 Lm/W IP44 Collingwood Switchable Product

**2 year  
on site  
guarantee**



Product code	Dimming	Driver required	UGR	W	CCT	Beam angle	lm	lm/W	Energy
SOLP66N4K	Non-Dimmable	Driver included with lumen output switch	19	22W	4000K	90°	3520	160	
				24W	4000K	90°	3840	160	
				26W	4000K	90°	4160	160	
				28W	4000K	90°	4480	160	
SOLP66X4K	Dimmable	Driver excluded use PS6501100MA	19	28W	4000K	90°	4480	160	

\*Emergency packs sold separately

Product code	Description
LEDEP10EM	Emergency pack for converting panels into emergency manual-test option
LEDEP10	Emergency pack for converting panels into emergency self or manual test option
LEDEP09DA	Emergency pack for converting panel into DALI emergency self-test option



# Solis IP65

600 x 600 IP65 LED panel



Product code	W	UGR	Driver	Dimming	CCT	∠	lm	lm/w	Energy
SOLIP66N4K	40W	UGR22	Driver included	On-Off	4000K	110°	4500	113	


\*Emergency packs sold separately

Product code	Description
LEDEP10EM	Emergency pack for converting panels into emergency manual-test option
LEDEP10	Emergency pack for converting panels into emergency self or manual test option
LEDEP09DA	Emergency pack for converting panel into DALI emergency self-test option

## Panels

- IP65** IP65 from below for a high level of dust & water protection
- Supplied with T connector for fast installation**
- EM!** Manual test emergency option is available with LEDEP10EM

<b>Guarantee</b>	5 years (product), 3 years (emg battery)
<b>Wattage</b>	40W
<b>IP rating</b>	IP65 (from below) IP20 (from above)
<b>Dimmable</b>	No
<b>UGR</b>	22
<b>TP rating</b>	TP(a)
<b>Input</b>	220-240V AC
<b>Emergency version available</b>	Yes, using converter
<b>Connector</b>	Push-fit terminal, loop-in/loop-out
<b>Electric class</b>	2



## Panels



Low UGR with UGR16 available



DALI-2, Push-Dim, & 0-10V options are available



Emergency option is available with LEDEP10

Guarantee	5 years (product), 3 years (emg battery)
Wattage	30W
IP rating	IP40
Dimmable	Yes (DALI-2, 0-10V, PUSH-DIM)
UGR	16
TP rating	TP(a)
Input	220-240V AC
Emergency version available	Yes, using converter
Connector	2 part first fit connector
Electric class	2



# Solis 600 x 600

4000K + 5000K LED panel range

2 year  
on site  
guarantee



Product code	W	UGR	Driver	Dimming	CCT	△	Im	Im/w	Energy
P2A16S30WA	30W	UGR16	Driver included	On-Off	4000K	90°	3450	115	
P2A16X30WA	30W	UGR16	PS6501100MA or EUP30T-IHMC-0	DALI2/ 0-10V/ Push-Dim	4000K	90°	3450	115	
P2A19S40WA	40W	UGR19	Driver included	On-Off	4000K	90°	4600	115	
P2A19X40WA	40W	UGR19	Driver excluded Use PS6501100MA	Dimmable	4000K	90°	4600	115	
P2A22S30WA	30W	UGR22	Driver included	On-Off	4000K	110°	3450	115	
P2A22S40WA	40W	UGR22	Driver included	On-Off	4000K	110°	4600	115	
P5A19S30WA	30W	UGR19	Driver included	On-Off	5000K	90°	3450	115	
P5A19X30WA	30W	UGR19	Driver excluded Use PS6501100MA	Dimmable	5000K	90°	3450	115	

\*Emergency packs sold separately

Product code	Description
LEDEP10EM	Emergency pack for converting panels into emergency manual-test option
LEDEP10	Emergency pack for converting panels into emergency self or manual test option
LEDEP09DA	Emergency pack for converting panel into DALI emergency self-test option

# Solis 1200 x 300

1200 x 300 LED panel

2 year  
on site  
guarantee



Product code	W	UGR	Driver	Dimming	CCT	Beam angle	lm	lm	Energy
P2B16S30WA	30W	UGR16	Driver included	On-Off	4000K	90°	3450	115	
P2B16X30WA	30W	UGR16	Driver excluded use PS6501100MA	DALI2/ 0-10V/ Push-Dim	4000K	90°	3450	115	
P2B16X30WA	30W	UGR16	Driver excluded use EUP30T-IHMC-0	TRIAC Mains Dim	4000K	90°	3450	115	

\*Emergency packs sold separately

Product code	Description
LEDEP10EM	Emergency pack for converting panels into emergency manual-test option
LEDEP10	Emergency pack for converting panels into emergency self or manual test option
LEDEP09DA	Emergency pack for converting panel into DALI emergency self-test option

## Panels



Low UGR with UGR16 available




Dimmable with TRIAC mains, Push-Dim, DALI 2 & 0-10V



Emergency option is available with LEDEP10

Guarantee	5 years (product), 3 years (emg battery)
Wattage	30W
IP rating	IP40
Dimmable	Yes (DALI-2, 0-10V, PUSH-DIM)
UGR	16
TP rating	TP(a)
Input	220-240V AC
Emergency version available	Yes, using converter
Connector	2 part first fit connector
Electric class	2



## Panels



**Low UGR with UGR19 available**



**Dimmable with TRIAC mains, Push-Dim, DALI 2 & 0-10V**



**Emergency option is available with LEDEP10**

<b>Guarantee</b>	5 years (product), 3 years (emg battery)
<b>Wattage</b>	60W
<b>IP rating</b>	IP40
<b>Dimmable</b>	Yes (DALI-2, 0-10V, PUSH-DIM)
<b>UGR</b>	19
<b>TP rating</b>	TP(a)
<b>Input</b>	220-240V AC
<b>Emergency version available</b>	Yes, using converter
<b>Connector</b>	2 part first fit connector
<b>Electric class</b>	2



# Solis 1200 x 600

1200 x 600 LED panel

**2 year**  
on site  
guarantee



Product code	W	UGR	Driver	Dimming	CCT	∠	lm	lm/w	Energy
<b>P2C19S60WA</b>	60W	UGR19	Driver included	On-Off	4000K	90°	6600	110	
<b>P2C19X60WA</b>	60W	UGR19	TR28000677	DALI2/ Push-Dim	4000K	90°	6600	110	
<b>P2C22S60WA</b>	60W	UGR22	Driver included	On-Off	4000K	110°	6900	115	

\*Emergency packs sold separately














Product code	Description
<b>LEDEP10EM</b>	Emergency pack for converting panels into emergency manual-test option
<b>LEDEP10</b>	Emergency pack for converting panels into emergency self or manual test option
<b>LEDEP09DA</b>	Emergency pack for converting panel into DALI emergency self-test option

# Panel accessories

## Easily install panels anywhere

The surface mount frame is an ideal solution to mount panels in places without suspended ceiling grids, and where recessed mounting is not possible. The suspension kit allows the panel to be suspended from a ceiling, which is ideal for situations where recessed mounting is not possible. The emergency pack turns your panel into an emergency version.

### Use the tables below to choose the perfect kit for your installation

Type	Use with 600 x 600mm panels	Use with 1200 x 300mm panels	Use with 1200 x 600mm panels
Surface mount kit	 <p>P2SMA</p>	 <p>P2SMB</p>	 <p>P2SMC</p>
Suspension mount kit	 <p>P1SK</p>	 <p>P1SK</p>	 <p>P1SKC</p>
Wattage switchable driver	 <p>DRV3001050</p>	 <p>DRV3001050</p>	 <p>DRV3001050</p>
Emergency pack	   <p>LEDEP09DA   LEDEP10   LEDEP10EM</p>	   <p>LEDEP09DA   LEDEP10   LEDEP10EM</p>	   <p>LEDEP09DA   LEDEP10   LEDEP10EM</p>

Product Code	Type	Compatible with
P2SMA	Surface mount kit for mounting panels onto solid surfaces	Solis 600x600
P2SMB	Surface mount kit for mounting panels onto solid surfaces	Solis 1200x300
P2SMC	Surface mount kit for mounting panels onto solid surfaces	Solis 1200x600
P1SK	Suspension mount kit for suspending panels from solid surfaces	Solis 600x600 & 1200x300
P1SKC	Suspension mount kit for suspending panels from solid surfaces	Solis 1200x600
DRV3001050	Driver for converting your Solis panel (maximum 40W) to wattage switchable	Solis 600x600 & 1200x300
LEDEP09DA	Emergency pack for converting panel into DALI emergency self-test option	Solis 600x600, 1200x300 & 1200x600
LEDEP10	Emergency pack for converting panels into emergency self-test & manual test switchable option	Solis 600x600, 1200x300 & 1200x600
LEDEP10EM	Emergency pack for converting panels into emergency manual-test option	Solis 600x600, 1200x300 & 1200x600



# Surface & Suspended



# Surface & Suspended

## Choice of finish

Choose the ideal colour for your installations aesthetic.

### Linear (Vera Tile & Linear Cell)

Versa Tile is available in all 3 colour finishes and Linear Cell is available in White and black, making them work with any installations aesthetic.



White



Black



Silver

## Choice of form

Choose the shape of fitting that is ideal for the environment it is going into.

### Linear fittings

Perfect for matching up to the building architecture of the windows and furniture.



1200mm  
Vera Tile



1500mm  
Linear Cell

## Shallow depth (Vera Tile & Linear Cell)

Designed to have a shallow depth for an architectural look.

38mm

**Versa Tile**  
Shallow depth of 38mm

50mm

**Linear Cell**  
Shallow width of 50mm

## Choice of lit effect (Versa Tile & Linear Cell)

Choose between Versa Tile and Linear Cell to create the ideal lit effect for your installation.

### Direction of light


#### Versa Tile

Up-down light (75% DLOR, 25% ULOR)  
for a decorative lit effect on your ceiling.



#### Linear Cell

Downward lit effect (100% DLOR).

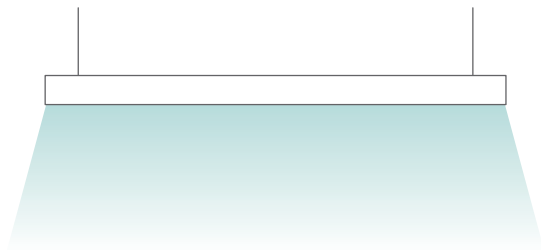

### Stand alone Vs Continuous light

#### Stand alone

Provide individual light and control for your users so they personalise what they like.



#### Continuous light

Creates lines of light up to 20 metres long using a single electrical feed.



## Versa Box (Versa Tile)

The Versa Box is a uniquely design compartment to house all of the components at either end of the Versa Tile. Through-wired, this makes it easy to plug-in different drivers, sensors and emergency packs to suit your project needs and makes the product very easy to repair, replace or upgrade.



## Surface & Suspended



Slim depth of just 38mm




UGR19 for low glare



75% down / 25% up ratio  
uses light efficiently

<b>Guarantee</b>	7 years (product), 5 years (emerg battery)
<b>Wattage</b>	45W
<b>IP rating</b>	IP20
<b>IK rating</b>	IK02
<b>Dimmable</b>	Yes (DALI-2, PUSH-DIM)
<b>Input</b>	220-240V AC
<b>LED lifetime</b>	L80 54,000h
<b>Emergency version available</b>	Yes, Self-Test
<b>Install connector type</b>	Push-fit terminal, loop-in/loop-out
<b>Ambient temperature</b>	0°C - 40°C
<b>Electric class</b>	1

1558mm



38mm




166mm

# Versa Tile White

UGR19 architectural linear suitable for surface, suspension or wall mount

2 year  
on site  
guarantee



Connector kit  
**VTWCON\***



Wall mount kit  
**VTWWALL\***

**Wattage**  
Switchable  
DALI-2\*

\*By custom request, please contact our sales team on 01604 495151

Product code	Finish	Type	W	CCT	°	lm	lm/W	Energy
<b>VTWID</b>	Matt white RAL9003	DALI-2 dimmable	45W	4000K	80	5500	120	
<b>VTWIDEM</b>	Matt white RAL9003	Emergency DALI-2 dimmable	45W	4000K	80	5500	120	
<b>VTWIDP</b>	Matt white RAL9003	DALI-2 Dimmable PIR Sensor	45W	4000K	80	5500	120	
<b>VTWIDPEM</b>	Matt white RAL9003	Emergency DALI-2 Dimmable PIR Sensor	45W	4000K	80	5500	120	
<b>VTWIN</b>	Matt white RAL9003	Standard	45W	4000K	80	5500	120	
<b>VTWINEM</b>	Matt white RAL9003	Emergency	45W	4000K	80	5500	120	
<b>VTWINP</b>	Matt white RAL9003	PIR sensor	45W	4000K	80	5500	120	
<b>VTWINPEM</b>	Matt white RAL9003	Emergency	45W	4000K	80	5500	120	



# Versa Tile Black

UGR19 architectural linear suitable for surface, suspension or wall mount

**2 year**  
on site  
guarantee



Connector kit  
**VTBCON\***



Wall mount kit  
**VTBWALL\***

**Wattage**  
Switchable  
DALI-2\*

\*By custom request, please contact our sales team on 01604 495151

Product code	Finish	Type	W	CCT	△	lm	lm/W	Energy
<b>VTB1D</b>	Black RAL9005	DALI-2 dimmable	45W	4000K	80	4500	100	
<b>VTB1DEM</b>	Black RAL9005	Emergency DALI-2 dimmable	45W	4000K	80	4500	100	
<b>VTB1DP</b>	Black RAL9005	DALI-2 Dimmable PIR Sensor	45W	4000K	80	4500	100	
<b>VTB1DPEM</b>	Black RAL9005	Emergency DALI-2 Dimmable PIR Sensor	45W	4000K	80	4500	100	
<b>VTB1N</b>	Black RAL9005	Standard	45W	4000K	80	4500	100	
<b>VTB1NEM</b>	Black RAL9005	Emergency	45W	4000K	80	4500	100	
<b>VTB1NP</b>	Black RAL9005	PIR sensor	45W	4000K	80	4500	100	
<b>VTB1NPEM</b>	Black RAL9005	Emergency	45W	4000K	80	4500	100	

## Surface & Suspended



**Slim depth of just 38mm**




**UGR19 for low glare**



**75% down / 25% up ratio  
uses light efficiently**

<b>Guarantee</b>	7 years (product), 5 years (emerg battery)
<b>Wattage</b>	45W
<b>IP rating</b>	IP20
<b>IK rating</b>	IK02
<b>Dimmable</b>	Yes (DALI-2, PUSH-DIM)
<b>Input</b>	220-240V AC
<b>LED lifetime</b>	L80 54,000h
<b>Emergency version available</b>	Yes, Self-Test
<b>Install connector type</b>	Push-fit terminal, loop-in/loop-out
<b>Ambient temperature</b>	0°C - 40°C
<b>Electric class</b>	1

**1558mm**



**38mm**



## Surface & Suspended



Slim depth of just 38mm




UGR19 for low glare



75% down / 25% up ratio  
uses light efficiently

<b>Guarantee</b>	7 years (product), 5 years (emerg battery)
<b>Wattage</b>	45W
<b>IP rating</b>	IP20
<b>IK rating</b>	IK02
<b>Dimmable</b>	Yes (DALI-2, PUSH-DIM)
<b>Input</b>	220-240V AC
<b>LED lifetime</b>	L80 54,000h
<b>Emergency version available</b>	Yes, Self-Test
<b>Install connector type</b>	Push-fit terminal, loop-in/loop-out
<b>Ambient temperature</b>	0°C - 40°C
<b>Electric class</b>	1

1558mm



38mm




166mm


# Versa Tile Silver

UGR19 architectural linear suitable for surface, suspension or wall mount

2 year  
on site  
guarantee



Connector kit  
**VTSCON\***



Wall mount kit  
**VTSWALL\***

**Wattage**  
Switchable  
DALI-2\*

\*By custom request, please contact our sales team on 01604 495151

Product code	Finish	Type	W	CCT	∠°	lm	lm/W	Energy
<b>VTS1D</b>	Silver	DALI-2 dimmable	45W	4000K	80	5000	110	
<b>VTS1DEM</b>	Silver	Emergency DALI-2 dimmable	45W	4000K	80	5000	110	
<b>VTS1DP</b>	Silver	DALI-2 Dimmable PIR Sensor	45W	4000K	80	5000	110	
<b>VTS1DPEM</b>	Silver	Emergency DALI-2 Dimmable PIR Sensor	45W	4000K	80	5000	110	
<b>VTS1N</b>	Silver	Standard	45W	4000K	80	5000	110	
<b>VTS1NEM</b>	Silver	Emergency	45W	4000K	80	5000	110	
<b>VTS1NIP</b>	Silver	PIR sensor	45W	4000K	80	5000	110	
<b>VTS1NPEM</b>	Silver	Emergency	45W	4000K	80	5000	110	



Surface & Suspended



Colour Switchable  
between 3000K-3500K-  
4000K




Contributes to a UGR19  
lighting design



Energy efficient up to  
130Lm/W

Guarantee	5 years (product), 5 years (emerg battery)
Wattage	38W
IP rating	IP20
IK rating	IK06
Dimmable	Yes (DALI-2, PUSH-DIM)
Input	220-240V AC
LED lifetime	L70 50,000h
Emergency version available	Yes
Install connector type	Push-fit terminal, loop-in/loop-out
Ambient temperature	-20°C - 50°C
Electric class	1



Linear Cell White

Low glare suspended light line luminaire



Connector kit  
**LCLCONKIT**



Ceiling Rose kit  
**LCLWIDCRKIT**




\*By custom request, please contact our sales team on 01604 495151

Product code	Finish	Type	W	CCT	Beam angle	lm	lm/W	Energy
LCLWID	White RAL9003	DALI-2 dimmable	38W	3000K	75°	4600	120	
				3500K	75°	5000	130	
				4000K	75°	4800	126	
LCLWIDEM	White RAL9003	Emergency DALI-2 dimmable	38W	3000K	75°	4600	120	
				3500K	75°	5000	130	
				4000K	75°	4800	126	

# Linear Cell Black

Low glare suspended light line luminaire

2 year  
on site  
guarantee

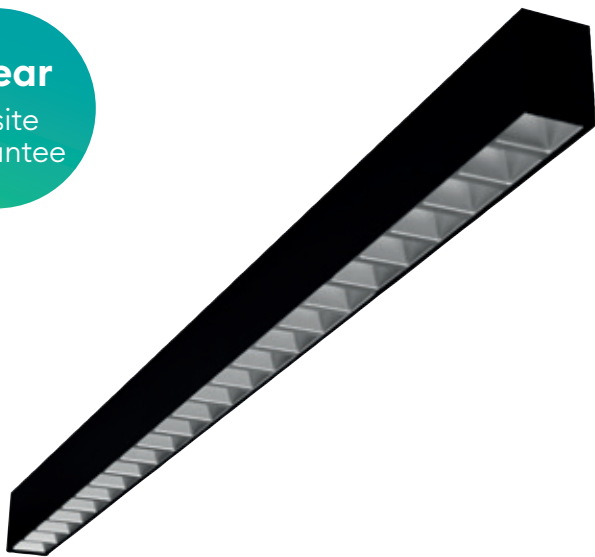

Connector kit  
**LCLCONKIT**



Ceiling Rose kit  
**LCLBS1DCRKIT**

Wattage  
Switchable  
DALI-2

\*By custom request, please contact our sales team on 01604 495151

Product code	Finish	Type	W	CCT	Beam angle	Im	Im/W	Energy
LCLBS1D	Matt black RAL9017	DALI-2 dimmable	38W	3000K	70°	4600	120	
				3500K	70°	5000	130	
				4000K	70°	4800	126	
LCLBS1DEM	Matt black RAL9017	Emergency DALI-2 dimmable	38W	3000K	70°	4600	120	
				3500K	70°	5000	130	
				4000K	70°	4800	126	


## Surface & Suspended

Colour Switchable  
between 3000K-3500K-  
4000K

UGR19  
Contributes to a UGR19  
lighting design

130lm/W  
Energy efficient up to  
130Llm/W

Guarantee	5 years (product), 5 years (emerg battery)
Wattage	38W
IP rating	IP20
IK rating	IK06
Dimmable	Yes (DALI-2, PUSH-DIM)
Input	220-240V AC
LED lifetime	L70 50,000h
Emergency version available	Yes
Install connector type	Push-fit terminal, loop-in/loop-out
Ambient temperature	-20°C - 50°C
Electric class	1



# Battens





# Battens

## Uniform | Uniform Versa

### Wattage switchable: one light, four wattage outputs

Wattage switchable product enables one luminaire to meet various lux levels within a project using a wattage output switch.

20W | 30W



23W | 35W



26W | 40W



30W | 45W



## IP44 & IK08 | IK06

High impact resistance ensures that accidental collisions will not adversely effect the performance of the product. Combine this with IP44 rated allows the product to be used in a wide range of applications

IK08

IP44

## Borealis easy installation

### Quick release button

The quick release buttons makes installation simple. Located on each end, and either side, they open up the batten to separate the diffuser and the gear tray from the base, with the hanging clips in place to ensure added convenience.



## Emergency bolt-on & PIR bolt-on sensors

The bolt-on's convert your Uniform linear or Borealis batten into an emergency, dimming or motion sensor. The PIRBOLT allow the user to set up on/off control or PIRBOLTDIM allows two step-dim parameter.

### Up to 6m high

Install as high as 6m high.

### Quick attachment

Fast 4 minute conversion time.

### Easy attachment

M20 interface for easy installation.

### LiFePO4 with 2-year guarantee

Long lasting battery.  
(Emergency bolt-on only)

### On/Off PIR control & daylight switching

Save energy and money.  
(PIR bolt-on only)

EMBOLT...



PIRBOLT




PIRBOLTDIM



## 20mm Cable entry

There are conduit/cable gland entry points from either side and the back of the fixture, which enables this product to satisfy many installation requirements, giving the option to conceal wiring behind the fixture or link them together via their loop-in loop-out terminal.

### Rear cable entry



### Side cable entry



## BESA mounting options

The battens can be mounted either directly on the surface, through the pre-drilled holes on the base of the fitting, or suspended via a hanging kit. The gear tray is can be removed entirely or it can be suspended from the base, whilst you work to mount.

### Surface mounted



### Suspended



**Borealis suspension kit** - Product code: **BTSK1**

**Uniform CSP suspension kit** - Product code: **UNISUS2M**

## Battens



**Wattage switchable**  
30W, 35W, 40W & 45W,  
4500lm to 6750lm



**Ultra-efficient up to 150**  
Llm/W



**UGR19 compliant low**  
glare lighting

<b>Guarantee</b>	7 years (product), 5 years (battery)
<b>Wattage</b>	30W - 35W - 40W - 45W
<b>IP rating</b>	IP44
<b>IK rating</b>	IK06
<b>Dimmable</b>	Yes (DALI-2, PUSH-DIM)
<b>Input</b>	220-240V AC
<b>LED lifetime</b>	L80 70,000h
<b>Emergency version available</b>	Manual, Self & DALI-2 options
<b>Install connector type</b>	Push-fit terminal, loop-in/loop-out
<b>Ambient temperature</b>	-20°C - 40°C
<b>Electric class</b>	1



# Uniform Versa 5ft

Wattage Switchable UGR19 Linear with plug-in Versabox accessories

**2 year**  
on site  
guarantee



**UGR19**

Product code	Finish	Dimmable	W	CCT	Beam angle	lm	lm/W	Energy
UNV5D40	White RAL9003	DALI-2 dimmable	30W	4000K	80°	4500	150	
			35W	4000K	80°	5250	150	
			40W	4000K	80°	6000	150	
			45W	4000K	80°	6750	150	
UNV5N40	White RAL9003	Standard non-dimmable	30W	4000K	80°	4500	150	
			35W	4000K	80°	5250	150	
			40W	4000K	80°	6000	150	
			45W	4000K	80°	6750	150	
UNV5NM40	White RAL9003	Microwave sensor non-dimmable	30W	4000K	80°	4500	150	
			35W	4000K	80°	5250	150	
			40W	4000K	80°	6000	150	
			45W	4000K	80°	6750	150	
UNV5V40	White RAL9003	1-10V dimmable	24W	4000K	80°	3600	150	
			30W	4000K	80°	4500	150	
			35W	4000K	80°	5400	150	
			40W	4000K	80°	6000	150	

Replace 'N' at the end of the part code with 'NE' for Emergency, 'NME' for Emergency microwave sensor, 'DE' for Emergency DALI-2 dimmable, and 'VE' for Emergency 0-10V. Plug-in kits are also available as separate accessories.

# Uniform 5ft

1500mm Surface Linear

2 year  
on site  
guarantee



**Bolt-on accessories**  
PIR or emergency bolt-on  
accessories available


UGR22

Product code	Finish	Dimmable	Type	W	CCT	∠°	lm	lm/W	Energy
UNL5SD	White RAL9016	DALI-2 dimmable	-	30W	4000K	120°	4500	150	
UNL5SDE	White RAL9016	Emergency DALI-2 dimmable	Emergency	30W	4000K	120°	4500	150	
UNL5SN	White RAL9016	Non-Dimmable with Wattage Output Switch	-	20W	4000K	120°	3000	150	
				23W	4000K	120°	3450	150	
				26W	4000K	120°	3984	150	
				30W	4000K	120°	4500	150	
UNL5SNE	White RAL9016	Non-Dimmable with Wattage Output Switch	Emergency	20W	4000K	120°	3000	150	
				23W	4000K	120°	3450	150	
				26W	4000K	120°	3900	150	
				30W	4000K	120°	4500	150	

## Battens

- Wattage switchable** between 20W, 23W, 26W & 30W
- Ultra-efficient** up to 150 Lm/W
- Quick and easy installation** with Push-fit terminal

Guarantee	5 years (product), 3 years (emerg battery)
Wattage	30W
IP rating	IP44 (ceiling surface mount) IP40 (suspended or wall mounted)
IK rating	IK08
Dimmable	Yes (DALI-2, PUSH-DIM)
Input	220-240V AC
LED lifetime	L80 70,000h
Emergency version available	Yes, Self-Test
Install connector type	Push-fit terminal, loop-in/loop-out
Ambient temperature	-20°C - 40°C
Electric class	1



## Battens



Wattage switchable  
between 20W, 23W, 26W  
& 30W




Ultra-efficient up to 150  
Llm/W



Quick and easy  
installation with Push-fit  
terminal

<b>Guarantee</b>	5 years (product), 3 years (emerg battery)
<b>Wattage</b>	30W or 20W - 23W - 26W - 30W
<b>IP rating</b>	IP44 (ceiling surface mount) IP40 (suspended or wall mounted)
<b>IK rating</b>	IK08
<b>Dimmable</b>	Yes (DALI-2, PUSH-DIM)
<b>Input</b>	220-240V AC
<b>LED lifetime</b>	L80 70,000h
<b>Emergency version available</b>	Yes, Self-Test
<b>Install connector type</b>	Push-fit terminal, loop-in/loop-out
<b>Ambient temperature</b>	-20°C - 40°C
<b>Electric class</b>	1



# Uniform 4ft

1200mm Surface Linear

**2 year**  
on site  
guarantee



**Bolt-on accessories**  
PIR or emergency bolt-on  
accessories available

**UGR22**

Product code	Finish	Dimmable	Type	W	CCT	△	lm	lm/W	Energy
UNL4SD	White RAL9016	DALI-2 dimmable	-	30W	4000K	120°	4500	150	
UNL4SDE	White RAL9016	Emergency DALI-2 dimmable	Emergency	30W	4000K	120°	4500	150	
UNL4SN	White RAL9016	Non- Dimmable with Wattage Output Switch	-	20W	4000K	120°	2822	150	
				23W	4000K	120°	3383	150	
				26W	4000K	120°	3984	150	
				30W	4000K	120°	4500	150	
UNL4SNE	White RAL9016	Non- Dimmable with Wattage Output Switch	Emergency	20W	4000K	120°	2822	150	
				23W	4000K	120°	3383	150	
				26W	4000K	120°	3984	150	
				30W	4000K	120°	4500	150	



# Uniform 6ft

1800mm Surface Linear

**2 year**  
on site  
guarantee



**Bolt-on accessories**  
PIR or emergency bolt-on  
accessories available


**UGR22**

Product code	Finish	Dimmable	Type	W	CCT	Beam angle	lm	lm/W	Energy
UNL6SD	White RAL9016	DALI-2 dimmable	-	30W	4000K	120°	4500	150	
UNL6SDE	White RAL9016	Emergency DALI-2 dimmable	Emergency	30W	4000K	120°	4500	150	
UNL6SN	White RAL9016	Non-Dimmable with Wattage Output Switch	-	20W	4000K	120°	2822	150	
				23W	4000K	120°	3383	150	
				26W	4000K	120°	3984	150	
				30W	4000K	120°	4500	150	
UNL6SNE	White RAL9016	Non-Dimmable with Wattage Output Switch	Emergency	20W	4000K	120°	2822	150	
				23W	4000K	120°	3383	150	
				26W	4000K	120°	3984	150	
				30W	4000K	120°	4500	150	

## Battens

- Wattage switchable** between 20W, 23W, 26W & 30W
- Ultra-efficient up to 150 lm/W**
- Quick and easy installation with Push-fit terminal**

<b>Guarantee</b>	5 years (product), 3 years (emerg battery)
<b>Wattage</b>	30W or 20W - 23W - 26W - 30W
<b>IP rating</b>	IP44 (ceiling surface mount) IP40 (suspended or wall mounted)
<b>IK rating</b>	IK08
<b>Dimmable</b>	Yes (DALI-2, PUSH-DIM)
<b>Input</b>	220-240V AC
<b>LED lifetime</b>	L80 70,000h
<b>Emergency version available</b>	Yes, Self-Test
<b>Install connector type</b>	Push-fit terminal, loop-in/loop-out
<b>Ambient temperature</b>	-20°C - 40°C
<b>Electric class</b>	1



## Battens



**High efficacy of  
130lm/W**



**Suspended gear tray for  
easy installation**



**Emergency option  
available**

<b>Guarantee</b>	5 years (product), 2 years (emerg battery)
<b>Wattage</b>	20W or 40W
<b>IP rating</b>	IP20
<b>IK rating</b>	IK06
<b>Dimmable</b>	Yes (DALI-2, 0-10V)
<b>Input</b>	220-240V AC
<b>LED lifetime</b>	L70 54,000h
<b>Emergency version available</b>	Yes
<b>Install connector type</b>	Loop in / Loop out
<b>Ambient temperature</b>	-20°C - 40°C
<b>Electric class</b>	1

1220mm



70mm



# Borealis 4ft

4ft Single, LED Batten, 20W Single and 40W Twin

**2 year  
on site  
guarantee**



**Bolt-on accessories**  
PIR or emergency bolt-on  
accessories available

Product code	Size	Type	W	CCT	Beam angle	lm	lm/W	Em lm	Energy
<b>BT4SD40</b>	Single	DALI-2 dimmable	20W	4000K	120°	2600	130	-	
<b>BT4SD40EM</b>		Emergency DALI-2 dimmable	20W	4000K	120°	2600	130	250	
<b>BT4SS40</b>		Standard	20W	4000K	120°	2600	130	-	
<b>BT4SS40EM</b>		Emergency	20W	4000K	120°	2600	130	250	
<b>BT4SV40</b>		1-10V dimmable	20W	4000K	120°	2600	130	-	
<b>BT4TD40</b>		DALI-2 dimmable	40W	4000K	120°	5200	130	-	
<b>BT4TD40EM</b>	Twin	Emergency DALI-2 dimmable	40W	4000K	120°	5200	130	250	
<b>BT4TS40</b>		Standard	40W	4000K	120°	5200	130	-	
<b>BT4TS40EM</b>		Emergency	40W	4000K	120°	5200	130	250	
<b>BT4TV40</b>		1-10V dimmable	40W	4000K	120°	5200	130	-	

# Borealis 5ft

5ft Single, LED Batten, 32W Single and 54W Twin













2 year  
on site  
guarantee



**Bolt-on accessories**  
PIR or emergency bolt-on  
accessories available

 **smart**  
Wireless available  
on request

Product code	Size	Type	W	CCT	Beam angle	lm	lm/W	Em lm	Energy
BT5SD40	Single	DALI-2 dimmable	32W	4000K	120°	4160	130	-	
BT5SD40EM		Emergency DALI-2 dimmable	32W	4000K	120°	4160	130	250	
BT5SS40		Standard	32W	4000K	120°	4160	130	-	
BT5SS40EM		Emergency	32W	4000K	120°	4160	130	250	
BT5SV40		1-10V dimmable	32W	4000K	120°	4160	130	-	
BT5TD40		DALI-2 dimmable	54W	4000K	120°	7020	130	-	
BT5TD40EM	Twin	Emergency DALI-2 dimmable	54W	4000K	120°	7020	130	250	
BT5TS40		Standard	54W	4000K	120°	7020	130	-	
BT5TS40EM		Emergency	54W	4000K	120°	7020	130	250	
BT5TV40		1-10V dimmable	54W	4000K	120°	7020	130	-	

## Battens

-  **High efficacy of 130lm/W**
-  **Suspended gear tray for easy installation**
-  **Emergency option available**

Guarantee	5 years (product), 2 years (emerg battery)
Wattage	32W or 54W
IP rating	IP20
IK rating	IK06
Dimmable	Yes (DALI-2, 0-10V)
Input	220-240V AC
LED lifetime	L70 54,000h
Emergency version available	Yes
Install connector type	Loop in / Loop out
Ambient temperature	-20°C - 40°C
Electric class	1



## Battens



High efficacy of  
124lm/W



Suspended gear tray for  
easy installation



Emergency option  
available

Guarantee	5 years (product), 2 years (emerg battery)
Wattage	42W or 70W
IP rating	IP20
IK rating	IK06
Dimmable	Yes (DALI-2, 0-10V)
Input	220-240V AC
LED lifetime	L70 54,000h
Emergency version available	Yes
Install connector type	Loop in / Loop out
Ambient temperature	-20°C - 40°C
Electric class	1

1828mm



76mm



# Borealis 6ft

6ft Single, LED Batten, 42W Single and 70W Twin

2 year  
on site  
guarantee



**Bolt-on accessories**  
PIR or emergency bolt-on  
accessories available

**smart**

Wireless available  
on request


Product code	Size	Type	W	CCT	△°	lm	lm/W	Em lm	Energy
BT6SD40	Single	DALI-2 dimmable	42W	4000K	120°	5200	124	-	
BT6SD40EM		Emergency DALI-2 dimmable	42W	4000K	120°	5200	124	250	
BT6SS40		Standard	42W	4000K	120°	5200	124	-	
BT6SS40EM		Emergency	42W	4000K	120°	5200	124	250	
BT6SV40	Twin	1-10V dimmable	42W	4000K	120°	5200	124	-	
BT6TD40		DALI-2 dimmable	70W	4000K	120°	8680	124	-	
BT6TD40EM		Emergency DALI-2 dimmable	70W	4000K	120°	8680	124	250	
BT6TS40		Standard	70W	4000K	120°	8680	124	-	
BT6TS40EM		Emergency	70W	4000K	120°	8680	124	250	
BT6TV40		1-10V dimmable	70W	4000K	120°	8680	124	-	

# Batten accessories

Make your batten perfect for your installation

Optional PIR sensor and emergency accessories combine excellence and unrivalled cost savings.

Use the tables below to choose the perfect accessory for your batten

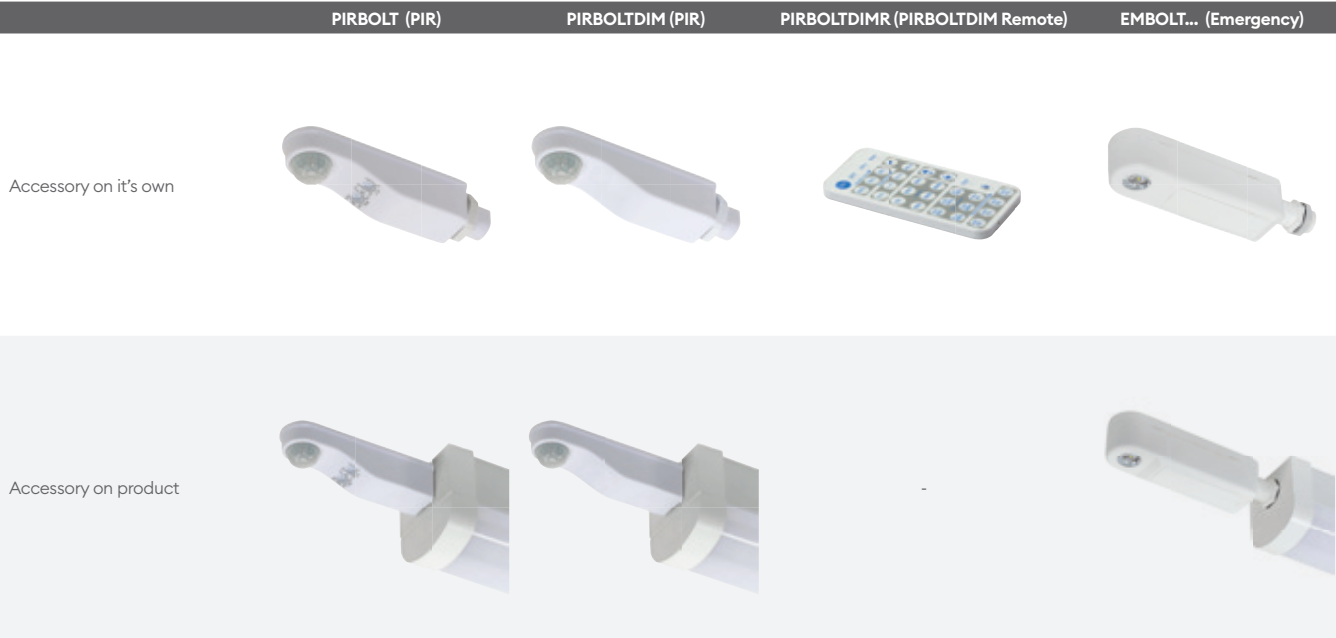

Product Code	Type	Compatible with
PIRBOLT	Bolt on PIR motion sensor	Borealis - single / twin, Uniform CSP
PIRBOLTDIM	Bolt on PIR dimming sensor (requires 0-10V driver)	Borealis - single / twin, Uniform CSP
PIRBOLTDIMR	Remote control for use with PIRBOLTDIM	Borealis - single / twin, Uniform CSP
EMBOLTCOR	Manual test corridor emergency bolt-on	Borealis - single / twin, Uniform CSP
EMBOLTMOPEN	Manual test open area lens emergency bolt-on	Borealis - single / twin, Uniform CSP
EMBOLTSCOR	Self-test corridor emergency bolt-on	Borealis - single / twin, Uniform CSP
EMBOLTSOPEN	Self-test open area lens emergency bolt-on	Borealis - single / twin, Uniform CSP

# Commercial downlights





# Commercial downlights

## Thea Pro

### Downlight

Offers two options from 145mm to 180mm and 165mm to 200mm making it a truly versatile product.

#### Advantages

- Ultra efficient 142Llm/W ensure low running costs
- UGR19 compliant low glare lighting when insert is used, snap fit accessory for ease of installation.
- DALI-2 drivers available to make your fitting dimmable.



## Converter plate (Thea Lite CSP and Pro only)

### Retro-fit downlights

Easily retro-fit your commercial downlight by using a converter plate. Simply place the downlight into the converter plate and the product will fill a hole Ø240-290mm.

#### Advantages

- Easily install downlights into ceilings with cut-outs too large for our products.



#### Product Code

DL801MW

#### Compatible with

Thea Lite CSP 200mm and Thea Pro 165-200mm

## Thea Lite CSP 3 products in 1

**CCT switchable:**  
**one light, three CCT temperatures**

Our range of colour switchable downlights allows you to stock 3 colour temperatures in 1 product (3000K, 4000K & 6000K / 6500K).

### Advantages

- Simpler product range.
- Products can be adjusted after they are installed.

#### 3000K



#### 4000K



#### 6500K



## CDL 6 products in 1

**Wattage switchable & CCT switchable:**  
**one light, two wattage, three CCT temperatures**

Our CDL02 is a wattage switchable downlight, which allows you to stock 2 wattage outputs in 1 product.

### Advantages

- Simpler product range.
- Products can be adjusted after they are installed.

#### Lower output



#### Higher output



## Commercial downlights



**Highly efficient 142  
Llm/W ensures low  
running costs**




**IP65 protected as  
standard, suitable  
for bathroom zone 1**



**UGR19 compliant low  
glare lighting when  
insert is used**

<b>Guarantee</b>	5 years (product), 3 years (emergency)
<b>Wattage</b>	10W
<b>IP rating</b>	IP65
<b>Dimmable</b>	Yes (DALI-2, PUSH-DIM)
<b>CRI</b>	CRI>80
<b>TP rating</b>	TP(a)
<b>Input</b>	220-240V AC
<b>Emergency version available</b>	Yes, using converter
<b>Install connector type</b>	Push-fit terminal, loop-in/loop-out
<b>Cut-out size</b>	145-180
<b>Electric class</b>	2



# Thea Pro 145-180mm 10W

High Performance UGR19 (using insert accessory) Downlight

**2 year  
on site  
guarantee**



Product code	Finish	Dimmable	Driver	W	CCT	Beam angle	lm	lm/W	Energy
<b>THP1N</b>	White RAL9003	On-Off	Driver Included	10W	4000K	80°	1400	140	
<b>THP1X</b>	White RAL9003	Dimmable	Driver Excluded Use THP1DD	10W	4000K	80°	1400	140	
<b>THP2N</b>	White RAL9003	On-Off	Driver Included	14W	4000K	80°	2000	142	
<b>THP2X</b>	White RAL9003	Dimmable	Driver Excluded Use THP23DD	14W	4000K	80°	2000	142	

\*Emergency packs sold separately

Product code	Description
<b>LEDEP10EM</b>	Emergency pack for converting into emergency manual-test option
<b>LEDEP10</b>	Emergency pack for converting into emergency self-test option
<b>LEDEP09ADA</b>	Emergency pack for converting into DALI emergency self-test option

# Thea Pro 165-200mm

## 14W

High Performance UGR19 (using insert accessory) Downlight



Product code	Finish	Dimmable	Driver	W	CCT	△	lm	lm	Energy
THP3N	White RAL9003	On-Off	Driver Included	14W	4000K	80°	2000	142	
THP3X	White RAL9003	Dimmable	Driver Excluded Use THP23DD	14W	4000K	80°	2000	142	
THP4N	White RAL9003	On-Off	Driver Included	25W	4000K	80°	3500	140	
THP4X	White RAL9003	Dimmable	Driver Excluded Use THP4DD	25W	4000K	80°	3500	140	


\*Emergency packs sold separately

Product code	Description
LEDEP10EM	Emergency pack for converting into emergency manual-test option
LEDEP10	Emergency pack for converting into emergency self-test option
LEDEP09ADA	Emergency pack for converting into DALI emergency self-test option

### Commercial downlights

- 142lm/W** Highly efficient 142 Llm/W ensures low running costs
- IP65** IP65 protected as standard, suitable for bathroom zone 1
- UGR19 or UGR22** UGR19 compliant low glare lighting when insert is used

Guarantee	5 years (product), 3 years (emergency)
Wattage	14W
IP rating	IP65
Dimmable	Yes (DALI-2, PUSH-DIM)
CRI	CRI>80
TP rating	TP(a)
Input	220-240V AC
Emergency version available	Yes, using converter
Install connector type	Push-fit terminal, loop-in/loop-out
Cut-out size	165-200
Electric class	2

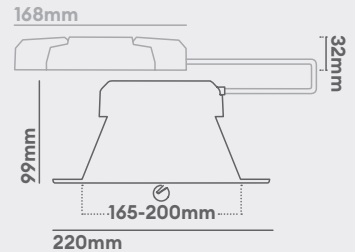

# Thea Pro accessories

## Make your downlight perfect for your installation

Reduce the UGR rating of your product with our UGR19 Inserts.  
Choose a suitable dimming option for your installation with the DALI 2 drivers.

### Use the tables below to choose the perfect accessory for your Thea Pro



### Thea Pro 145-180mm accessory product codes

Product Code	Description	Compatible with
THP12UGR	UGR19 baffle insert	Thea Pro 145-185mm (THP1 & THP2)
THP12GOLWHI	White bezel with gold baffle insert	Thea Pro 145-185mm (THP1 & THP2)
THP12BLKWHI	Black bezel with white baffle insert	Thea Pro 145-185mm (THP1 & THP2)
THP12BLKBLK	Black bezel with black baffle insert	Thea Pro 145-185mm (THP1 & THP2)
THP12BROBLK	Black bezel with bronze baffle insert	Thea Pro 145-185mm (THP1 & THP2)
THP12SURKITW	White surface mounting kit for THP1 + THP2, Only compatible with THP23DD driver	Thea Pro 145-185mm (THP1 & THP2)
THP12SURKITB	Black surface mounting kit for THP1 + THP2, Only compatible with THP23DD driver	Thea Pro 145-185mm (THP1 & THP2)
THP1DD	DALI-2 Driver for THP1	Thea Pro 145-185mm (THP1 only)
THP23DD	DALI-2 Driver for THP2	Thea Pro 145-185mm (THP2 only)
LEDEP10EM	Emergency pack for converting Thea Pro into emergency manual-test option	Thea Pro 145-185mm
LEDEP10	Emergency pack for converting Thea Pro into emergency self-test option	Thea Pro 145-185mm
LEDEP09DA	Emergency pack for converting Thea Pro into DALI emergency self-test option	Thea Pro 145-185mm

The Surface kit with integral emergency are prebuilt at Collingwood. For suspension kits please contact us for further information



	THP1DD	THP23DD	THP4DD	LEDEP10EM	LEDEP10	LEDEP09DA	
Drivers & Emergency							
	THP34UGR	THP34GOLWHI	THP34BLKWHI	THP34BLKBLK	THP34BROBLK	THP34SURKITW	THP34SURKITB
Accessory on it's own							
Accessory on product							

## Thea Pro 165-200mm accessory product codes

Product Code	Description	Compatible with
THP34UGR	UGR19 baffle insert	Thea Pro 165-200mm (THP3 & THP4)
THP34GOLWHI	White bezel with gold baffle insert	Thea Pro 165-200mm (THP3 & THP4)
THP34BLKWHI	Black bezel with white baffle insert	Thea Pro 165-200mm (THP3 & THP4)
THP34BLKBLK	Black bezel with black baffle insert	Thea Pro 165-200mm (THP3 & THP4)
THP34BROBLK	Black bezel with bronze baffle insert	Thea Pro 165-200mm (THP3 & THP4)
THP34SURKITW	White surface mounting kit for THP3 + THP4, Only compatible with THP4DD driver	Thea Pro 165-200mm (THP3 & THP4)
THP34SURKITB	Black surface mounting kit for THP3 + THP4, Only compatible with THP4DD driver	Thea Pro 165-200mm (THP3 & THP4)
THP23DD	DALI-2 Driver for THP3	Thea Pro 165-200mm (THP3 only)
THP4DD	DALI-2 Driver for THP4	Thea Pro 165-200mm (THP4 only)
LEDEP10EM	Emergency pack for converting Thea Pro into emergency manual-test option	Thea Pro 165-200mm
LEDEP10	Emergency pack for converting Thea Pro into emergency self-test option	Thea Pro 165-200mm
LEDEP09DA	Emergency pack for converting Thea Pro into DALI emergency self-test option	Thea Pro 165-200mm

The Surface kit with integral emergency are prebuilt at Collingwood. For suspension kits please contact us for further information

# Commercial downlights



Colour temperature switchable, 3000K-4000K-6000K




Highly efficient up to 120 Lm/W ensures low running costs



Quick and easy installation with plug & play connectors

Guarantee	5 years (product), 3 years (emergency)
Wattage	10W
IP rating	IP54 (from below) IP20 (from above)
Dimmable	Yes (DALI-2, 0-10V, PUSH-DIM)
CRI	CRI>80
TP rating	TP(a)
Input	220-240V AC
Emergency version available	Yes, using converter
Install connector type	Push-fit terminal, loop-in/loop-out
Cut-out size	100
Electric class	2



# Thea Lite CSP 100mm

Colour Switchable IP54 Downlight



Product code	Finish	Dimmable	Driver	W	CCT	Beam	Im	Im/W	Energy
THLIT	White RAL9003	Mains-Dim	Driver Included Mains	10W	3000K	80°	1100	110	
					4000K	80°	1200	120	
					6000K	80°	1200	120	
THLIX	White RAL9003	Dimmable	Driver Excluded Use PS250600MA	10W	3000K	80°	1100	110	
					4000K	80°	1200	120	
					6000K	80°	1200	120	
THLBIT	Matt Black RAL9005	Mains-Dim	Driver Included Mains	10W	3000K	80°	1000	100	
					4000K	80°	1100	110	
					6000K	80°	1100	110	
THLBIX	Matt Black RAL9005	Dimmable	Driver Excluded Use PS250600MA	10W	3000K	80°	1000	100	
					4000K	80°	1100	110	
					6000K	80°	1100	110	

\*Emergency packs sold separately

Product code	Description
LEDEP10EM	Emergency pack for converting into emergency manual-test option
LEDEP10	Emergency pack for converting into emergency self-test option
LEDEP09ADA	Emergency pack for converting into DALI emergency self-test option

# Thea Lite CSP 150mm

Colour Switchable IP54 Downlight



Product code	Finish	Dimmable	Driver	W	CCT	Beam angle	lm	lm/W	Energy
THL2T	White RAL9003	Mains-Dim	Driver Included Mains	14W	3000K	90°	1550	111	
					4000K	90°	1680	120	
					6500K	90°	1680	120	
THL2X	White RAL9003	Dimmable	Driver Excluded Use PS250600MA	14W	3000K	90°	1550	111	
					4000K	90°	1680	120	
					6500K	90°	1680	120	
THLB2T	Matt Black RAL9005	Mains-Dim	Driver Included Mains	14W	3000K	90°	1500	107	
					4000K	90°	1600	114	
					6500K	90°	1600	114	
THLB2X	Matt Black RAL9005	Dimmable	Driver Excluded Use PS250600MA	14W	3000K	90°	1500	107	
					4000K	90°	1600	114	
					6500K	90°	1600	114	

\*Emergency packs sold separately

Product code	Description
LEDEP10EM	Emergency pack for converting into emergency manual-test option
LEDEP10	Emergency pack for converting into emergency self-test option
LEDEP09ADA	Emergency pack for converting into DALI emergency self-test option

## Commercial downlights



Colour temperature  
switchable,  
3000K-4000K-6500K




Highly efficient up to  
120 lm/W ensures low  
running costs



Quick and easy  
installation with plug &  
play connectors

Guarantee	5 years (product), 3 years (emergency)
Wattage	14W
IP rating	IP54 (from below) IP20 (from above)
Dimmable	Yes (DALI-2, 0-10V, PUSH-DIM)
CRI	CRI>80
TP rating	TP(a)
Input	220-240V AC
Emergency version available	Yes, using converter
Install connector type	Push-fit terminal, loop-in/loop-out
Cut-out size	150
Electric class	2

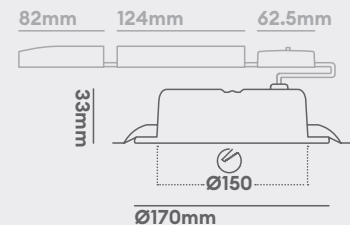

## Commercial downlights



Colour temperature  
switchable,  
3000K-4000K-6500K




Highly efficient up to  
120 Lm/W ensures low  
running costs



Quick and easy  
installation with plug &  
play connectors

<b>Guarantee</b>	5 years (product), 3 years (emergency)
<b>Wattage</b>	20W
<b>IP rating</b>	IP54 (from below) IP20 (from above)
<b>Dimmable</b>	Yes (DALI-2, 0-10V, PUSH-DIM)
<b>CRI</b>	CRI>80
<b>TP rating</b>	TP(a)
<b>Input</b>	220-240V AC
<b>Emergency version available</b>	Yes, using converter
<b>Install connector type</b>	Push-fit terminal, loop-in/loop-out
<b>Cut-out size</b>	200
<b>Electric class</b>	2



# Thea Lite CSP 200mm

Colour Switchable IP54 Downlight

**2 year**  
on site  
guarantee



Product code	Finish	Dimmable	Driver	W	CCT	Beam angle	Im	Im/W	Energy
THL3T	White RAL9003	Mains-Dim	Driver Included Mains	20W	3000K	90°	2200	110	
					4000K	90°	2400	120	
					6500K	90°	2400	120	
THL3X	White RAL9003	Dimmable	Driver Excluded Use PS250600MA	20W	3000K	90°	2200	110	
					4000K	90°	2400	120	
					6500K	90°	2400	120	
THLB3T	Matt Black RAL9005	Mains-Dim	Driver Included Mains	20W	3000K	90°	2050	103	
					4000K	90°	2250	113	
					6500K	90°	2250	113	
THLB3X	Matt Black RAL9005	Dimmable	Driver Included	20W	3000K	90°	2050	103	
					4000K	90°	2250	113	
					6500K	90°	2250	113	

\*Emergency packs sold separately

Product code	Description
LEDEP10EM	Emergency pack for converting into emergency manual-test option
LEDEP10	Emergency pack for converting into emergency self-test option
LEDEP09ADA	Emergency pack for converting into DALI emergency self-test option

# CDL 12-18W

Colour and wattage switchable commercial downlight



2 year  
on site  
guarantee



Product code	Finish	W	CCT	Beam angle	lm	lm/W	Energy
CDL0218S	Matt white	12W	3000K	110°	1250	104	
			4000K	110°	1450	120	
			6000K	110°	1400	116	
		18W	3000K	110°	1650	92	
			4000K	110°	2000	111	
			6000K	110°	1800	100	

## Commercial downlights



Colour switchable  
between 3000k, 4000K  
& 6500K




Wattage switchable  
between 12W & 18W



High efficacy of up to  
120lm/W

Guarantee	3 years
Wattage	12W / 18W
IP rating	IP44
Dimmable	No
CRI	CRI>80
Input	220-240V AC
Emergency version available	No
Install connector type	Flying lead
Cut-out size	120-200
Electric class	2



# Commercial outdoors





## Perimeter lighting

### Energy savings

Automatically switch the light **off** during daylight and when there is no presence to save energy.

#### Advantages

- Save energy
- Save money



#### Motion detection (Halo)

Turns light on with movement.



#### Daylight switching

Holds light off during daylight hours.


## Warmer light

### 2200K **Ember** light

Minimising the blue light content of outdoor lighting is key to improving the survival and growth rates of nocturnal animals.



That's why Collingwood is introducing outdoor lighting with 2200K. The amount of blue light in 2200K is significantly less than 4000K or even 3000K.

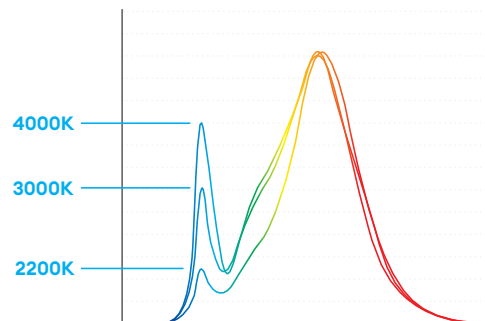

## Complete exterior solution

Our range of outdoor exterior lights designed to work perfectly together.



**Arc / Arc Pro**  
Perimeter light



**Halo**  
Entrance light



**Tilt**  
Building / Landscape light



**Fountain**  
Pond light



**Hydra**  
Pathway / Car park light

**Cyclo**

## Hydra bollard

**CCT & Wattage switchable: one light, two CCT temperatures and three wattage outputs**

Hydra colour and wattage switchable bollard allows you to stock 2 colour temperatures (2200K & 3000K) and 3 wattage outputs (14W, 19W & 24W) in 1 product.

**2200K**



**3000K**



**14W**



**19W**



**24W**



## Commercial outdoor



CCT switchable between  
3000K, 4000K & 5000K



Up to 165lm/W efficacy




Integral photocell as  
standard

Guarantee	5 years
Wattage	10W or 17W
IP rating	IP66
Dimmable	No
Input	220-240V AC
LED lifetime	L70 54,000h
Emergency version available	Yes
Sensor available	PC Dusk to Dawn
Install connector type	Push-fit terminal, loop-in/loop-out
Ambient temperature	-30°C - 50°C
Electric class	1

293mm

97mm


289mm



# Arc 10W & 17W

Wallpack suitable for 3m (10W) or 4m (17W) mounting height

**2 year**  
on site  
guarantee



Product code	Finish	Type	W	CCT	Beam angle	Im	lm/W	Em lm	Energy
ARA1N	Anthracite grey RAL7016	Standard	10W	3000K	98°/114°	1550	155	-	
				4000K	98°/114°	1650	165	-	
				5000K	98°/114°	1600	160	-	
ARA1NE	Anthracite grey RAL7016	Emergency	10W	3000K	98°/114°	1550	155	300	
				4000K	98°/114°	1650	165	300	
				5000K	98°/114°	1600	160	300	
ARA2N	Anthracite grey RAL7016	Standard	17W	3000K	98°/114°	2600	153	-	
				4000K	98°/114°	2750	162	-	
				5000K	98°/114°	2700	159	-	
ARA2NE	Anthracite grey RAL7016	Emergency	17W	3000K	98°/114°	2600	153	300	
				4000K	98°/114°	2750	162	300	
				5000K	98°/114°	2700	159	300	

# Arc Pro CSP 6W - 15W

0% ULOR Wallpack suitable for mounting heights from 2.5 up to 4 metres

2 year  
on site  
guarantee



Product code	Finish	Type	W	CCT	∠°	lm	lm/W	Energy
ARPBIN	Matt Black RAL9005	Standard	6W	2700K	140° x 70°	850	142	
				3000K	140° x 70°	850	142	
			8W	2700K	140° x 70°	1100	138	
				3000K	140° x 70°	1100	138	
			10W	2700K	140° x 70°	1400	127	
				3000K	140° x 70°	1400	127	
			12W	2700K	140° x 70°	1650	138	
				3000K	140° x 70°	1650	138	
			15W	2700K	140° x 70°	2000	133	
				3000K	140° x 70°	2000	133	
				2700K	140° x 70°	2000	133	
				3000K	140° x 70°	2000	133	

Add 'E' at the end of the part code to order an Emergency version

## Commercial outdoor



CCT switchable between  
2700K & 3000K (default)



Wattage Switchable  
between 6,8,10,12, & 15W




Integral photocell as  
standard

Guarantee	5 years
Wattage	6 - 8 - 10 - 12 - 15 or 17W
IP rating	IP66
Dimmable	Yes (DALI-2)
Input	220-240V AC
LED lifetime	L70 54,000h
Emergency version available	Yes
Sensor available	PC Dusk to Dawn
Install connector type	Push-fit terminal, loop-in/loop-out
Ambient temperature	-30°C - 50°C
Electric class	1

293mm

97mm



292mm

## Commercial outdoor



360-degree lit effect



IK10 perfect for external use




CCT switchable between 3000K, 4000K & 5700K

Guarantee	5 years
Wattage	12W
IP rating	IP65
Dimmable	No
Input	220-240V AC
LED lifetime	L70 50,000h
Emergency version available	Yes
Sensor available	Microwave
Install connector type	Loop in / Loop out
Ambient temperature	-20°C - 45°C
Electric class	2

Ø275mm

67mm



# Halo Wall Light 12W

12W Wall Light CSP Switchable

2 year  
on site  
guarantee



Eyelid fascia  
**WLHAEYE**

Product code	Finish	Type	W	CCT	∠°	lm	lm/W	Em lm	Energy
WLHA1M	Anthracite grey RAL7016	Microwave sensor	12W	3000K	110°	1250	104	-	
				4000K	110°	1300	108	-	
				5700K	110°	1350	113	-	
WLHA1ME	Anthracite grey RAL7016	Microwave and Emergency	12W	3000K	110°	1250	104	200	
				4000K	110°	1300	108	200	
				5700K	110°	1350	113	200	
WLHA1N	Anthracite grey RAL7016	Standard	12W	3000K	110°	1250	104	-	
				4000K	110°	1300	108	-	
				5700K	110°	1350	113	-	
WLHA1NE	Anthracite grey RAL7016	Emergency	12W	3000K	110°	1250	104	200	
				4000K	110°	1300	108	200	
				5700K	110°	1350	113	200	



# Hydra Bollard Black

Interchangeable top head bollard with 1.5% ULOR



Post & ground kit  
sold separately  
**HYBXBOLLARD**



Product code	Finish	Type	W	CCT	∠°	lm	lm/W	Energy
HYB1CONEB	Black - Black	Standard	14W	2200K	360°	1000	71	
				3000K	360°	1150	82	
			19W	2200K	360°	1400	74	
				3000K	360°	1500	79	
			24W	2200K	360°	1700	71	
				3000K	360°	1800	75	
HYB1CONEBPC	Black - Black	Photocell	14W	2200K	360°	1000	71	
				3000K	360°	1150	82	
			19W	2200K	360°	1400	74	
				3000K	360°	1500	79	
			24W	2200K	360°	1700	71	
				3000K	360°	1800	75	

## Commercial outdoor



IK10 for a robust fitting




CCT Switchable between  
2200K & 3000K



Wattage Switchable  
between 14W, 19W &  
24W

Guarantee	5 years
Wattage	14W - 24W
IK rating	IK10
IP rating	IP65
Dimmable	No
Input	220-240V AC
LED lifetime	L80 50,000h
Sensor available	Photocell
Ambient temperature	-40°C - 45°C
Electric class	1

Ø160mm



## Commercial outdoor



IK10 for a robust fitting




CCT Switchable between 2200K & 3000K



Wattage Switchable between 14W, 19W & 24W

Guarantee	5 years
Wattage	14W - 24W
IK rating	IK10
IP rating	IP65
Dimmable	No
Input	220-240V AC
LED lifetime	L80 50,000h
Sensor available	Photocell
Ambient temperature	-40°C - 45°C
Electric class	1

Ø160mm



813mm

# Hydra Bollard Silver

Interchangeable top head bollard for specular effect



Post & ground kit sold separately  
**HYBXBOLLARD**



Product code	Finish	Type	W	CCT	Beam angle	lm	lm/W	Energy
HYB1CONES	Black - Silver	Standard	14W	2200K	360°	1300	93	
				3000K	360°	1500	107	
			19W	2200K	360°	1800	95	
				3000K	360°	1950	103	
			24W	2200K	360°	2250	94	
				3000K	360°	2400	100	
HYB1CONESPC	Black - Silver	Photocell	14W	2200K	360°	1300	93	
				3000K	360°	1500	107	
			19W	2200K	360°	1800	95	
				3000K	360°	1950	103	
			24W	2200K	360°	2250	94	
				3000K	360°	2400	100	

# Hydra Bollard White

Interchangeable top head bollard for maximum coverage



Post & ground kit  
sold separately  
**HYBXBOLLARD**



Product code	Finish	Type	W	CCT	Beam angle	lm	lm/W	Energy
HYB1OPALW	Black - White	Standard	14W	2200K	360°	1050	75	
				3000K	360°	1200	86	
			19W	2200K	360°	1450	76	
				3000K	360°	1550	82	
			24W	2200K	360°	1750	73	
				3000K	360°	1900	79	
HYB1OPALWPC	Black - White	Photocell	14W	2200K	360°	1050	75	
				3000K	360°	1200	86	
			19W	2200K	360°	1450	76	
				3000K	360°	1550	82	
			24W	2200K	360°	1750	73	
				3000K	360°	1900	79	

Commercial  
outdoor



IK10 for a robust fitting



CCT Switchable between  
2200K & 3000K



Wattage Switchable  
between 14W, 19W &  
24W

Guarantee	5 years
Wattage	14W - 24W
IK rating	IK10
IP rating	IP65
Dimmable	No
Input	220-240V AC
LED lifetime	L80 50,000h
Sensor available	Photocell
Ambient temperature	-40°C - 45°C
Electric class	1

Ø160mm



# Choosing the ideal Hydra bollard

## For your installation

Use the four easy steps below to select the perfect bollard for your installation.

### 1 Bollard heads



Standard - **HYB1CONEB**  
Photocell - **HYB1CONEBPC**



Standard - **HYB1CONES**  
Photocell - **HYB1CONESPC**




Standard - **HYB1OPALW**  
Photocell - **HYB1OPALWPC**

### 2 Bollard post & ground kit



**HYBxBOLLARD\***  
Including post, base and ground  
fixing kit

### 3 Ground fixing options



**HYBxBOLTKIT**  
Concrete



**HYBxROOTKIT**  
Soft ground

### 4 180° Spill light kit











**HYBxSPILLKIT**  
Transforms your 360° light  
into a 180° light output

- This is required for your bollard installation, unless you are fitting the head to an existing post of the same diameter.

# Hydra accessories

Make your bollard perfect for your installation

When ordering your bollard head, you must order HYBXBOLLARD (post and ground kit)  
See other accesories below

	HYBXBOLLARD	HYBXBOLTKIT	HYBXROOTKIT	HYBXSPILLKIT
Accessory on it's own				
Accessory on product				

## Product codes

Product Code	Description	Guarantee
HYBXBOLLARD	Post with ground kit for Hydra Bollard	5 years
HYBXBOLTKIT	Expansion bolt kit for Hydra Bollard	5 years
HYBXROOTKIT	Root mounting kit for Hydra Bollard	5 years
HYBXSPILLKIT	Spill light kit for Hydra Bollard	5 years

For full product specification visit [collingwoodlighting.com](http://collingwoodlighting.com)

# Bulkheads





# Bulkheads

## Bulkheads

### CCT switchable: one light, three CCT temperatures

Our range of colour switchable bulkheads allows you to stock 3 colour temperatures in 1 product (3000K, 4000K & 6000K).

#### Advantages

- Simpler product range.
- Products can be adjusted after they are installed.

3000K



4000K



6000K



### Wattage switchable: one light, three wattage outputs

Our WL95 Versa range of wattage switchable bulkhead allows you to stock 3 wattage outputs in 1 product.

#### Advantages

- Simpler product range.
- Products can be adjusted after they are installed.

Lower output



Medium output



Higher output



## Quick & easy installation

**WL94** bulkhead come with push-fit terminals and detachable bracket for quick & easy installation.

Push-fit terminals.



Removable twist and lock panel for easy access.



Simply push the quick release button to detach the bracket.



**WL95 Versa** bulkheads comes with detachable push-fit terminals for convenient wiring, and 4 way conduit entry points for quick & easy installation.

Detachable Push-fit terminal.



4 x Conduit entry points



**WL95 Versa** plug in kits available

## Microwave



Microwave + Photocell plug-in options

## Emergency



Manual-test, Self-test DALI-2 test plug-in options

## Microwave step-dim sensor

The WL94 sensor detects movement from up to 6 meters away and allows the user to set up two step-dim parameters, reducing the light output during stand-by period, saving energy whilst maintaining ambient illuminance for a prolonged period, until turns off, offering full control of the luminaire light output and the time it is on.

### Sufficient daylight

With sufficient daylight, even when movement detected, light remains off.



### Insufficient daylight

With insufficient daylight, when movement detected, light turns on.



### Hold time

After last detection, light will be dimmed down to stand-by dimming level.



### Stand-by period

After stand-by dimming level period, light turns off.



Bulkheads



CCT switchable between 3000K, 4000K & 6500K




Quick and easy installation bracket



Emergency option available

Guarantee	3 years
Wattage	10W
IP rating	IP44
Dimmable	No
Input	220-240V AC
LED lifetime	L70 35,000h
Emergency version available	Yes
Sensor available	Microwave (Step-Dim)
Install connector type	4 ways, push-fit
Ambient temperature	-20°C - 40°C
Electric class	2



WL94 10W

IP44 LED slim decorative Bulkhead

2 year  
on site  
guarantee



Product code	Finish	Type	W	CCT	∠°	lm	lm/W	Energy
WL9410CCS	White	Emergency Microwave sensor	10W	3000K	120°	1000	100	
				4000K	120°	1100	110	
				6500K	120°	1100	110	
WL9410ECS	White	Emergency	10W	3000K	120°	1000	100	
				4000K	120°	1100	110	
				6500K	120°	1100	110	
WL9410MCS	White	Microwave sensor	10W	3000K	120°	1000	100	
				4000K	120°	1100	110	
				6500K	120°	1100	110	
WL9410SCS	White	Standard	10W	3000K	120°	1000	100	
				4000K	120°	1100	110	
				6500K	120°	1100	110	

# WL94 18W

IP44 LED slim decorative Bulkhead

2 year  
on site  
guarantee



Product code	Finish	Type	W	CCT	Beam angle	lm	lm/W	Energy
WL9418CCS	White	Emergency Microwave sensor	18W	3000K	120°	1800	100	
				4000K	120°	2000	111	
				6500K	120°	2000	111	
WL9418ECS	White	Emergency	18W	3000K	120°	1800	100	
				4000K	120°	2000	111	
				6500K	120°	2000	111	
WL9418MCS	White	Microwave sensor	18W	3000K	120°	1800	100	
				4000K	120°	2000	111	
				6500K	120°	2000	111	
WL9418SCS	White	Standard	18W	3000K	120°	1800	100	
				4000K	120°	2000	111	
				6500K	120°	2000	111	

## Bulkheads



CCT switchable between  
3000K, 4000K & 6500K




Quick and easy  
installation bracket



Emergency option  
available

Guarantee	3 years
Wattage	18W
IP rating	IP44
Dimmable	No
Input	220-240V AC
LED lifetime	L70 35,000h
Emergency version available	Yes
Sensor available	Microwave (Step-Dim)
Install connector type	4 ways, push-fit
Ambient temperature	-20°C - 40°C
Electric class	2

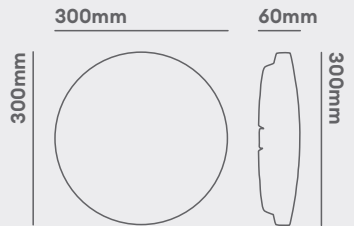

# Bulkheads



CCT switchable between  
3000K, 4000K & 6000K




Wattage switchable  
options from 5W to 20W



IK09 for impact  
protection

Guarantee	5 years (product), 5 years (battery), 2 years (on-site)
Wattage	5W - 6.5W - 8W
IP rating	IP65
Dimmable	Yes (DALI-2)
Input	220-240V AC
LED lifetime	L70 50,000h
Emergency version available	Manual & Self options
Sensor available	Microwave + Photocell options
Install connector type	Push-fit terminal, loop-in/loop-out
Ambient temperature	-20°C - 40°C
Electric class	2



# WL95 Versa 5W - 8W

CCT Colour & Wattage Switchable Bulkhead with plug-in  
Versabox accessories

Coming soon

2 year  
on site  
guarantee



Plug-in  
kits available

Product code	Finish	Type	W	CCT	Beam angle	Im	Im/W	Energy
WL95W2DCS	White	250mm DALI-2	5W	3000K	115°	700	140	
				4000K	115°	750	150	
				6000K	115°	750	150	
			6.5W	3000K	115°	950	146	
				4000K	115°	1000	154	
				6000K	115°	1000	154	
			8W	3000K	115°	1200	150	
				4000K	115°	1250	156	
				6000K	115°	1250	156	
WL95W2NCS	White	250mm On-Off	5W	3000K	115°	700	140	
				4000K	115°	750	150	
				6000K	115°	750	150	
			6.5W	3000K	115°	950	146	
				4000K	115°	1000	154	
				6000K	115°	1000	154	
			8W	3000K	115°	1200	150	
				4000K	115°	1250	156	
				6000K	115°	1250	156	



# WL95 Versa 5W - 8W

CCT Colour & Wattage Switchable Bulkhead with plug-in Versabox accessories

Coming soon

2 year  
on site  
guarantee



Plug-in  
kits available

Product code	Finish	Type	W	CCT	Beam angle	Im	Im/W	Energy
WL95B2DCS	Black	250mm DALI-2	5W	3000K	115°	700	140	
				4000K	115°	750	150	
				6000K	115°	750	150	
			6.5W	3000K	115°	950	146	
				4000K	115°	1000	154	
				6000K	115°	1000	154	
			8W	3000K	115°	1200	150	
				4000K	115°	1250	156	
				6000K	115°	1250	156	
			5W	3000K	115°	700	140	
				4000K	115°	750	150	
				6000K	115°	750	150	
WL95B2NCS	Black	250mm On-Off	5W	3000K	115°	700	140	
				4000K	115°	750	150	
				6000K	115°	750	150	
			6.5W	3000K	115°	950	146	
				4000K	115°	1000	154	
				6000K	115°	1000	154	
			8W	3000K	115°	1200	150	
				4000K	115°	1250	156	
				6000K	115°	1250	156	
			5W	3000K	115°	700	140	
				4000K	115°	750	150	
				6000K	115°	750	150	


## Bulkheads

CCT switchable between 3000K, 4000K & 6000K

Wattage switchable options from 5W to 20W

IK09 for impact protection

Guarantee	5 years (product), 5 years (battery), 2 years (on-site)
Wattage	5W - 6.5W - 8W
IP rating	IP65
Dimmable	Yes (DALI-2)
Input	220-240V AC
LED lifetime	L70 50,000h
Emergency version available	Manual & Self options
Sensor available	Microwave + Photocell options
Install connector type	Push-fit terminal, loop-in/loop-out
Ambient temperature	-20°C - 40°C
Electric class	2

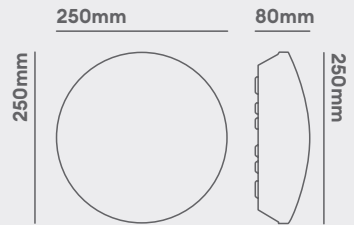

## Bulkheads



CCT switchable between  
3000K, 4000K & 6000K




Wattage switchable  
options from 5W to 20W



IK09 for impact  
protection

Guarantee	5 years (product), 5 years (battery), 2 years (on-site)
Wattage	10W - 15W - 20W
IP rating	IP65
Dimmable	Yes (DALI-2)
Input	220-240V AC
LED lifetime	L70 50,000h
Emergency version available	Manual, Self & DALI-2 options
Sensor available	Microwave + Photocell options
Install connector type	Push-fit terminal, loop-in/loop-out
Ambient temperature	-20°C - 40°C
Electric class	2



# WL95 Versa 10W - 20W

CCT Colour & Wattage Switchable Bulkhead with plug-in  
Versabox accessories

Coming soon

2 year  
on site  
guarantee



Plug-in  
kits available

Product code	Finish	Type	W	CCT	Beam angle	Im	Im/W	Energy
WL95W3DCS	White	300mm DALI-2	10W	3000K	115°	1450	140	A++ C
				4000K	115°	1500	150	
				6000K	115°	1500	150	
			15W	3000K	115°	2100	140	
				4000K	115°	2200	147	
				6000K	115°	2200	147	
			20W	3000K	115°	2800	140	
				4000K	115°	3000	150	
				6000K	115°	3000	150	
WL95W3NCS	White	300mm On-Off	10W	3000K	115°	1450	145	A++ C
				4000K	115°	1500	150	
				6000K	115°	1500	150	
			15W	3000K	115°	2100	140	
				4000K	115°	2200	147	
				6000K	115°	2200	147	
			20W	3000K	115°	2800	140	
				4000K	115°	3000	150	
				6000K	115°	3000	150	

# WL95 Versa 10W - 20W

CCT Colour & Wattage Switchable Bulkhead with plug-in Versabox accessories

Coming soon

2 year  
on site  
guarantee



Plug-in  
kits available

Product code	Finish	Type	W	CCT		lm	lm/W	Energy
WL95B3DCS	Black	300mm DALI-2	10W	3000K	115°	1450	140	
				4000K	115°	1500	150	
				6000K	115°	1500	150	
			15W	3000K	115°	2100	140	
				4000K	115°	2200	147	
				6000K	115°	2200	147	
			20W	3000K	115°	2800	140	
				4000K	115°	3000	150	
				6000K	115°	3000	150	
			WL95B3NCS	Black	300mm On-Off	10W	3000K	
4000K	115°	1500					150	
6000K	115°	1500					150	
15W	3000K	115°				2100	140	
	4000K	115°				2200	147	
	6000K	115°				2200	147	
20W	3000K	115°				2800	140	
	4000K	115°				3000	150	
	6000K	115°				3000	150	


## Bulkheads

CCT switchable between 3000K, 4000K & 6000K

Wattage switchable options from 5W to 20W

IK09 for impact protection

Guarantee	5 years (product), 5 years (battery), 2 years (on-site)
Wattage	10W - 15W - 20W
IP rating	IP65
Dimmable	Yes (DALI-2)
Input	220-240V AC
LED lifetime	L70 50,000h
Emergency version available	Manual, Self & DALI-2 options
Sensor available	Microwave + Photocell options
Install connector type	Push-fit terminal, loop-in/loop-out
Ambient temperature	-20°C - 40°C
Electric class	2

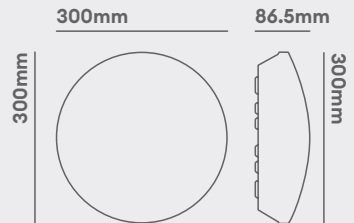









# WL95 Versa accessories

Make your WL95 Versa perfect for your installation

A variety of plug-in options available below for your install

Use the tables below to choose the perfect Plug-in for your bulkhead

Use with	WLKITPC	WLKITMWS	WLKITSELFEM	WLKITMANEM
WL95 Versa 300mm				
WL95 Versa 250mm				




Product Code	Type	Compatible with
WLKITPC	Photocell plug-in kit	WL95 Versa 300mm & 250mm
WLKITMWS	Microwave Sensor On/Off plug-in kit	WL95 Versa 300mm & 250mm
WLKITSELFEM	Self-test emergency plug-in	WL95 Versa 300mm & 250mm
WLKITMANEM	Manual-test emergency plug-in	WL95 Versa 300mm & 250mm

# Fascias

## Make your bulkhead perfect for your installation

Change the look without having to change the fitting with our bulkhead fascia options.

### Use the tables below to choose the perfect accessory for your bulkhead

Use with	No accessory	Eyelid fascia for 300mm bulkheads only
WL95 Versa white (300mm only)		
WL95 Versa black (300mm only)		

Product Code	Type	Compatible with
WL95BEW	White eyelid fascia	WL95 Versa 300mm white
WL95BE	Black eyelid fascia	WL95 Versa 300mm black

# Emergency lighting







# Emergency lighting

## Emergency range

The Collingwood emergency range is safe, reliable and full of market leading performance features. It has low operational running costs across the long product lifetime. The complete range features bulkheads, exit boxes, exit blades, escape routes and twin spots, all complying with ISO 3864-1.



① Blade

② Box / Bulkhead

③ Route

④ Max

## Mounting options

	Emergency Blade	Emergency Box	Emergency Bulkhead	Emergency Route	Emergency Twin spot	Salvus Max	Salvus Surface
Ceiling	●		●	●		●	●
Wall	●	●	●		●	●	
Suspended	●		●				
Conduit M20			●		●	●	●
BESA			●			●	
Open area lens				●			●
Corridor lens				●			●

# Self-test vs. Manual test

Regular tests need to be conducted on the emergency fittings to ensure they are still performing correctly. The two tests which need to be conducted are for emergency light operation and the battery duration. There are two methods of conducting this test, a manual test and a self-test.

## Manual test

A manual test can be performed locally by pressing the product test button that forces the emergency luminaire to go into emergency mode, or by switching off the mains.

The inspection is done in real-time, visually, by the operator in charge of the test.

## Self-test

The self-test unit automatically performs numerous tests in the background. Any failure is indicated by the LED, that can start to blink or change its colour, depending on the product type.

The inspection is done by visually checking the LED indicator status.

The inspection frequency tests required are determined by EN 50172, which our products comply with. It should last as long as it is needed to make the emergency light source turn on, so in case of our products, only a few seconds.

The battery duration test should be performed at least yearly. It should last for the rated battery duration, so for manual test products, it has to be executed when there is a minimum risk for the occupants.

	Emergency Blade	Emergency Box	Emergency Bulkhead	Emergency Route	Emergency Twin spot	Salvus Max	Salvus Surface
Self test	●	●	●	●	●	●	
Manual test	●	●	●	●		●	●

# Maintained vs Non-maintained

## Maintained

These are when the fittings are on all the time, like a normal luminaire. These are mains powered and have a battery backup, which keeps the lights on in the event of a power failure. For example, the emergency blade is maintained, so if for any reason there is a power failure the emergency blade will stay lit using the battery backup.

## Non-maintained

These only turn on in the event of a power failure. There is a set duration that the light will be live for, which depends on the battery and product type. For instance, our escape route emergency luminaire light remains off and only turns on when the mains power goes down.

Emergency lighting



LiFePO4 battery  
available



Self-test or Manual test  
available



Auxiliary floor  
illumination to light  
areas under fitting

Guarantee	3 years
Wattage	4.0W
Maintained / Non-maintained	Maintained
Viewing distance	30m
IP rating	IP20
IK rating	IK08
Input	220-240V AC
Battery	LiFePO4
Install connector type	Push-fit terminal, loop-in/loop-out
Construction material	Lens PC housing PC
Electric class	2
Mounting options	Ceiling, wall & suspended
Legends	See page 137



# Salvus Emergency Exit Blade

50lm, emergency exit blade, 30m viewing distance



Product code	Testing	Battery	W	CCT	lm
EMBL30M	Manual-test	LiFePO4	4.0W	6500K	50
EMBL30S	Self-test	LiFePO4	4.0W	6500K	50

# Salvus Emergency Exit Box

47lm, emergency exit box, 35m viewing distance



Product code	Testing	Battery	W	CCT	lm
EMBX35M	Manual-test	NiCd	3.5W	6500K	47
EMBX35S	Self-test	LiFePO4	3.5W	6500K	47

## Emergency lighting



**LiFePO4 battery**  
available




**Self-test or Manual test**  
available



**Auxiliary floor**  
illumination to light  
areas under fitting

<b>Guarantee</b>	Manual-test: 2 years Self-test: 3 years
<b>Wattage</b>	3.5W
<b>Maintained / Non-maintained</b>	Manual-test: Maintained/Non-Maintained Self-test: Maintained
<b>Viewing distance</b>	35m
<b>IP rating</b>	IP20
<b>IK rating</b>	IK08
<b>Input</b>	220-240V AC
<b>Battery</b>	NiCd
<b>Install connector type</b>	Push-fit terminal, loop-in/loop-out
<b>Construction material</b>	Lens PC housing PC
<b>Electric class</b>	2
<b>Mounting options</b>	Wall
<b>Legends</b>	See page 137

390.3mm



195.3mm



30mm

Emergency lighting



LiFePO4 battery available




Self-test or Manual test available




IP65 suitable for outdoor environments

Guarantee	2 years
Wattage	3.0W
Maintained / Non-maintained	Maintained/Non-Maintained
Viewing distance	18m
IP rating	IP65
IK rating	IK07
Input	220-240V AC
Battery	LiFePO4
Install connector type	Push-fit terminal, loop-in/loop-out
Construction material	Lens PC housing ABS
Electric class	2
Mounting options	Ceiling, wall, suspended, BESA & conduit M20
Legends	Included

355mm



110mm



56mm

# Salvus Emergency Bulkhead

145lm, emergency bulkhead, 18m viewing distance



Product code	Testing	Battery	W	CCT	lm
EMBH145M	Manual-test	LiFePO4	3.0W	6500K	145
EMBH145S	Self-test	LiFePO4	3.0W	6500K	145



# Salvus Max

High output non-maintained emergency bulkhead

wattage  
switchable



Product code	Testing	W	°	CCT	lm
EMBMAX	Manual-test	6W   10W	135°	6500K	1000-1500
EMBMAXST	Self-test	6W   10W	135°	6500K	1000-1500

## Emergency lighting



High efficacy of 167lm/W



Wattage Switchable  
between 6W & 10W



IP66 suitable for  
warehouse all  
applications

Guarantee	4 years on electronics, 2 years on battery
Wattage	6W-10W
Maintained / Non-maintained	Non-Maintained
Viewing distance	N/A
IP rating	IP66
Input	220-240V AC
Battery	LiFePO4 6.4V 6.6Ah
Install connector type	Push-fit terminal, loop-in/loop-out
Construction material	PC
Electric class	2



## Emergency lighting



High efficacy of  
130lm/W




Quick and easy  
installation with loop-in/  
loop-out connector



Low energy consumption  
of 1W

Guarantee	4 years on electronics, 2 years on battery
Wattage	1W
Maintained / Non-maintained	Maintained/Non-Maintained
Viewing distance	N/A
IP rating	IP20
Input	220-240V AC
Battery	LiFePO4 3.2V 1500mAh
Install connector type	Integrated terminals, loop-in/loop-out
Construction material	Polycarbonate
Electric class	2
Cut-out	Ø43 - 44mm



# Salvus Route

High Performance Emergency Spot




Open and corridor area lenses  
Included

Product code	Finish	Testing	Beam angle	lm
EMRBMAN	Black	Manual Test	165° / 160°x50°	130 Open - 120 Corridor
EMRBST	Black	Self-Test	165° / 160°x50°	130 Open - 120 Corridor
EMRWMAN	White	Manual Test	165° / 160°x50°	130 Open - 120 Corridor
EMRWST	White	Self-Test	165° / 160°x50°	130 Open - 120 Corridor

# Salvus Surface

High Performance Emergency Spot



Open and corridor area lenses  
Included

Product code	Finish	Testing	Beam angle	lm
EMSBRDEM	Black	Manual Test	165° / 160°x50°	280 Open - 230 Corridor
EMSBSQEM	Black	Manual Test	165° / 160°x50°	280 Open - 230 Corridor
EMSWRDEM	White	Manual Test	165° / 160°x50°	280 Open - 230 Corridor
EMSWSQEM	White	Manual Test	165° / 160°x50°	280 Open - 230 Corridor

## Emergency lighting



High efficacy of  
140lm/W




Quick and easy  
installation with loop-in/  
loop-out connector



Low energy consumption  
of 2W

Guarantee	4 years on electronics, 2 years on battery
Wattage	2W
Maintained / Non-maintained	Maintained/Non-Maintained
Viewing distance	N/A
IP rating	IP65
Input	220-240V AC
Battery	LiFePO4 3.2V 1500mAh
Install connector type	Integrated terminals, loop-in/loop-out
Construction material	Polycarbonate
Electric class	2



Emergency lighting



LiFePO4 battery  
available




Self-test available



IP65 suitable for outdoor  
environments

Guarantee	3 years
Wattage	4.8W
Maintained / Non-maintained	Non-maintained
Viewing distance	N/A
IP rating	IP65
IK rating	IK08
Input	220-240V AC
Battery	LiFePO4
Install connector type	Push-fit terminal, loop-in/loop-out
Construction material	Lens PC housing PC
Electric class	2
Mounting options	Wall



# Salvus Emergency Twin Spot

400lm, self test emergency twin spot












Product code	Testing	Battery	W	CCT	lm
EMTW400S	Self-test	LiFePO4	4.8W	6500K	400

# Salvus emergency accessories

Make your emergency lighting perfect for your install

Standardised ISO 3864-1 labels are supplied separately for the blade and box.  
The blade can be mounted from a ceiling using our suspension kit.

## Use the tables below to choose the perfect accessory

Use with	Up legend	Down legend	Left legend	Right legend	Suspension kit
Emergency blade	 EMBLUP	 EMBLDO	 EMBLLE	 EMBLRI	 EMBSLK
Emergency box	 EMBXUP	 EMBXDO	 EMBXLE	 EMBXRI	-
Emergency bulkhead	Comes with it's own fully configurable legend sticker. Use to create up, down, left or right legends.				-

Product Code	Type	Compatible with
EMBLUP	Up legend for emergency blade	Salvus emergency blade
EMBLDO	Down legend for emergency blade	Salvus emergency blade
EMBLLE	Left legend for emergency blade	Salvus emergency blade
EMBLRI	Right legend for emergency blade	Salvus emergency blade
EMBXUP	Up legend for emergency box	Salvus emergency box
EMBXDO	Down legend for emergency box	Salvus emergency box
EMBXLE	Left legend for emergency box	Salvus emergency box
EMBXRI	Right legend for emergency box	Salvus emergency box
EMBSLK	Suspension kit	Salvus emergency blade

# Anti- corrosives





# Anti-corrosives

## Wattage & CCT switchable

### Wattage switchable: one light, two wattage outputs

Caiman Versa provides both the output of a single and a twin anti-corrosive within the same product.

#### Advantages

- Reduces stockholding from twelve luminaires to be three.
- Adjust using DIP switches on the driver during installation.

Product	Single output		Twin output	
Caiman Versa 4ft	18W	2590 - 5500lm	37W	5180 - 5550lm
Caiman Versa 5ft	28W	3920 - 4200lm	56W	7840 - 8400lm
Caiman Versa 6ft	33W	4690 - 5025lm	67W	9380 - 10050lm

### CCT switchable: one light, three CCT temperatures

Our colour switchable anti corrosive allows you to stock 3 colour temperatures in 1 product (3000K, 4000K & 5700K).

#### Advantages

- Customer can choose which colour they prefer.
- Adjust using a switch during installation.

3000K Warm White



4000K Cool White




5700K Daylight



## Time saving installation

### Fully flexible first-fix bracket

A unique full mounting slider which spans the full length of the luminaire on the back of the housing. The feature removes the need for measuring up where to place your bracket drill points because the bracket can go anywhere on the slider.

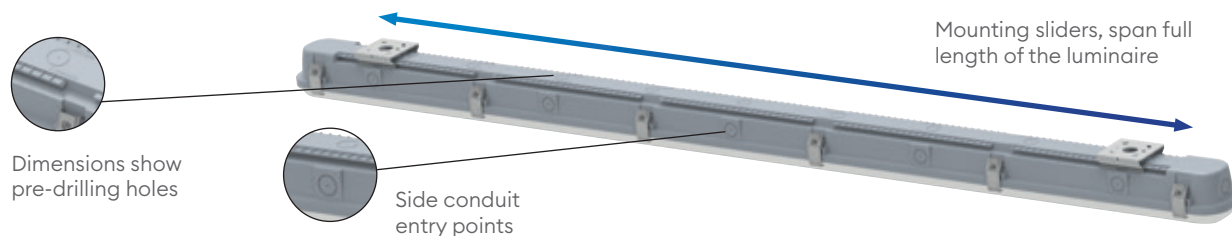

## Mounting options

### Caiman Versa

Caiman Versa is suitable for when the mains cable entry is fed via the rear or the side conduit of the product. It can be mounted to BESA using accessory ACBESA or using the standard bracket supplied, installed on ceilings, walls or suspended on chain.



### Caiman Quick Connect

Use this solution when the mains cable entry is fed via the side conduit entry to avoid the need to open any clips or luminaire to install it! Just remove cap, push-in your wires to the connector and screw on the PG Gland.



### Dimmable



0-10V, PUSH DIM  
DALI-2

### Microwave



Microwave On-Off  
Microwave STEP-DIM

### Emergency



Manual-test, Self-test  
DALI-2 test

### IP66 & IK10



High impact and high  
water and dust resistance

## Anti-corrosives



CCT switchable between  
3000K, 4000K & 5700K



Wattage Switchable



IP66 and IK10 for total  
protection

Guarantee	7 years (product), 5 years (battery), 2 years (on-site)
Wattage	18W - 37W
IP rating	IP66
IK rating	IK10
Dimmable	Yes (DALI-2, 0-10V, PUSH-DIM)
Input	220-240V AC
LED lifetime	L70 100,000h
Emergency version available	Manual, Self & DALI-2 options
Install connector type	Removeable, moveable, loop in/out
Ambient temperature	-20°C - 35°C
Electric class	1

1200mm



92.3mm




# Caiman Versa 4ft

CCT Colour & Wattage Switchable Anti-Corrosive with plug-in  
Versabox accessories

2 year  
on site  
guarantee




Sliding bracket  
spans length of luminaire



Plug & Play  
Microwave sensor



Plug & Play  
EM sensor



Product code	W	CCT	∠°	lm	lm/W	Em lm	Energy
AC4N	18W	3000K	120°	2590	144	240	
		4000K	120°	2775	154	240	
		5700K	120°	2775	154	240	
	37W	3000K	120°	5180	144	240	
		4000K	120°	5550	154	240	
		5700K	120°	5550	154	240	

\*Replace 'N' at the end of the part code with: 'NEM' for Manual-test Emergency models | 'D' for DALI-2/PUSH DIM | 'V' for 0-10V | Plug in kits also available as separate accessories.


# Caiman Quick Connect 4ft

Wire a side mains cable entry without needing to open luminaire (product is through-wired)

2 year  
on site  
guarantee



Sliding bracket  
spans length of luminaire



Plug & Play  
Microwave sensor



Product code	W	CCT	⤴	lm	lm/W	Em lm	Energy
AC4TWN	18W	3000K	120°	2590	144	N/A	
		4000K	120°	2775	154	N/A	
		5700K	120°	2775	154	N/A	
	37W	3000K	120°	5180	144	N/A	
		4000K	120°	5550	154	N/A	
		5700K	120°	5550	154	N/A	

## Anti-corrosives



CCT switchable between  
3000K, 4000K & 5700K




Wattage Switchable



IP66 for external use

Guarantee	7 years (product), 5 years (battery), 2 years (on-site)
Wattage	18W - 37W
IP rating	IP66
IK rating	IK10
Dimmable	No
Input	220-240V AC
LED lifetime	L70 100,000h
Emergency version available	No
Install connector type	Removeable, moveable, loop in/out
Ambient temperature	-20°C - 35°C
Electric class	1

1200mm



92.3mm



## Anti-corrosives



CCT switchable between  
3000K, 4000K & 5700K



Wattage Switchable



IP66 and IK10 for total  
protection

Guarantee	7 years (product), 5 years (battery), 2 years (on-site)
Wattage	28W - 56W
IP rating	IP66
IK rating	IK10
Dimmable	Yes (DALI-2, 0-10V, PUSH-DIM)
Input	220-240V AC
LED lifetime	L70 100,000h
Emergency version available	Manual, Self & DALI-2 options
Install connector type	Removeable, moveable, loop in/out
Ambient temperature	-20°C - 35°C
Electric class	1

1500mm



92.3mm



# Caiman Versa 5ft

CCT Colour & Wattage Switchable Anti-Corrosive with plug-in  
Versabox accessories

2 year  
on site  
guarantee




Sliding bracket  
spans length of luminaire



Plug & Play  
Microwave sensor



Plug & Play  
EM sensor



Product code	W	CCT	∠°	lm	lm/W	Em lm	Energy
AC5N	28W	3000K	120°	3920	140	230	
		4000K	120°	4200	150	230	
		5700K	120°	4200	150	230	
	56W	3000K	120°	7840	140	230	
		4000K	120°	8400	150	230	
		5700K	120°	8400	150	230	

\*Replace 'N' at the end of the part code with: 'NEM' for Manual-test Emergency models | 'D' for DALI-2/PUSH DIM | 'V' for 0-10V | Plug in kits also available as separate accessories.


# Caiman Quick Connect 5ft

Wire a side mains cable entry without needing to open luminaire (product is through-wired)

**2 year**  
on site  
guarantee



Sliding bracket  
spans length of luminaire



Plug & Play  
Microwave sensor



Product code	W	CCT	∠°	lm	lm/W	Em lm	Energy
AC5TWN	28W	3000K	120°	3920	140	N/A	
		4000K	120°	4200	150	N/A	
		5700K	120°	4200	150	N/A	
	56W	3000K	120°	7840	140	N/A	
		4000K	120°	8400	150	N/A	
		5700K	120°	8400	150	N/A	

## Anti-corrosives



CCT switchable between  
3000K, 4000K & 5700K



Wattage Switchable



IP66 for external use

Guarantee	7 years (product), 5 years (battery), 2 years (on-site)
Wattage	28W - 56W
IP rating	IP66
IK rating	IK10
Dimmable	No
Input	220-240V AC
LED lifetime	L70 100,000h
Emergency version available	No
Install connector type	Removeable, moveable, loop in/out
Ambient temperature	-20°C - 35°C
Electric class	1

1500mm



92.3mm



## Anti-corrosives



CCT switchable between  
3000K, 4000K & 5700K



Wattage Switchable



IP66 and IK10 for total  
protection

Guarantee	7 years (product), 5 years (battery), 2 years (on-site)
Wattage	33W - 67W
IP rating	IP66
IK rating	IK10
Dimmable	Yes (DALI-2, 0-10V, PUSH-DIM)
Input	220-240V AC
LED lifetime	L70 100,000h
Emergency version available	Manual, Self & DALI-2 options
Install connector type	Removeable, moveable, loop in/out
Ambient temperature	-20°C - 35°C
Electric class	1

1800mm



92.3mm



# Caiman Versa 6ft

CCT Colour & Wattage Switchable Anti-Corrosive with plug-in  
Versabox accessories

2 year  
on site  
guarantee




Sliding bracket  
spans length of luminaire



Plug & Play  
Microwave sensor



Plug & Play  
EM sensor



Product code	W	CCT	∠°	lm	lm/W	Em lm	Energy
AC6N	33W	3000K	120°	4690	142	200	
		4000K	120°	5025	152	200	
		5700K	120°	5025	152	200	
	67W	3000K	120°	9380	140	200	
		4000K	120°	10050	150	200	
		5700K	120°	10050	150	200	

\*Replace 'N' at the end of the part code with: 'NEM' for Manual-test Emergency models | 'D' for DALI-2/PUSH DIM | 'V' for 0-10V | Plug in kits also available as separate accessories.



# Caiman Quick Connect 6ft

Wire a side mains cable entry without needing to open luminaire (product is through-wired)

**2 year**  
on site  
guarantee



Sliding bracket  
spans length of luminaire



Plug & Play  
Microwave sensor



Product code	W	CCT	∠°	lm	lm/W	Em lm	Energy
AC6TWN	33W	3000K	120°	4690	142	N/A	
		4000K	120°	5025	152	N/A	
		5700K	120°	5025	152	N/A	
	67W	3000K	120°	9380	140	N/A	
		4000K	120°	10050	150	N/A	
		5700K	120°	10050	150	N/A	

## Anti-corrosives



CCT switchable between  
3000K, 4000K & 5700K



Wattage Switchable



IP66 for external use

Guarantee	7 years (product), 5 years (battery), 2 years (on-site)
Wattage	33W - 67W
IP rating	IP66
IK rating	IK10
Dimmable	No
Input	220-240V AC
LED lifetime	L70 100,000h
Emergency version available	No
Install connector type	Removeable, moveable, loop in/out
Ambient temperature	-20°C - 35°C
Electric class	1

1800mm



92.3mm













73mm

# Caiman anti-corrosive accessories

Make your anti-corrosive perfect for your installation


Optional PIR sensor and emergency accessories combine excellence and unrivalled cost savings.

Use the tables below to choose the perfect accessory for your Caiman

	ACKITMANEM	ACKITSELFEM	ACKITDALIEM	ACKITMWS	ACKITMWSDIM
Accessory on its own					
Accessory on product					

## Product codes

Product Code	Type	Compatible with
ACKITMANEM	Manual Test Emergency plug-in Versabox	Caiman Versa
ACKITSELFEM	Self Test Emergency plug-in Versabox	Caiman Versa
ACKITDALIEM	DALI-2 Emergency plug-in Versabox (requires DALI-2 driver)	Caiman Versa
ACKITMWS	Microwave Sensor on/off plug-in Versabox	Caiman Versa & Caiman Quick Connect
ACKITMWSDIM	Microwave Sensor Dim plug-in Versabox (requires 0-10V driver)	Caiman Versa
ACREMOTEMWS	Remote for Microwave Sensor	Caiman Versa
ACBESA	BESA Mounting Bracket	Caiman Versa

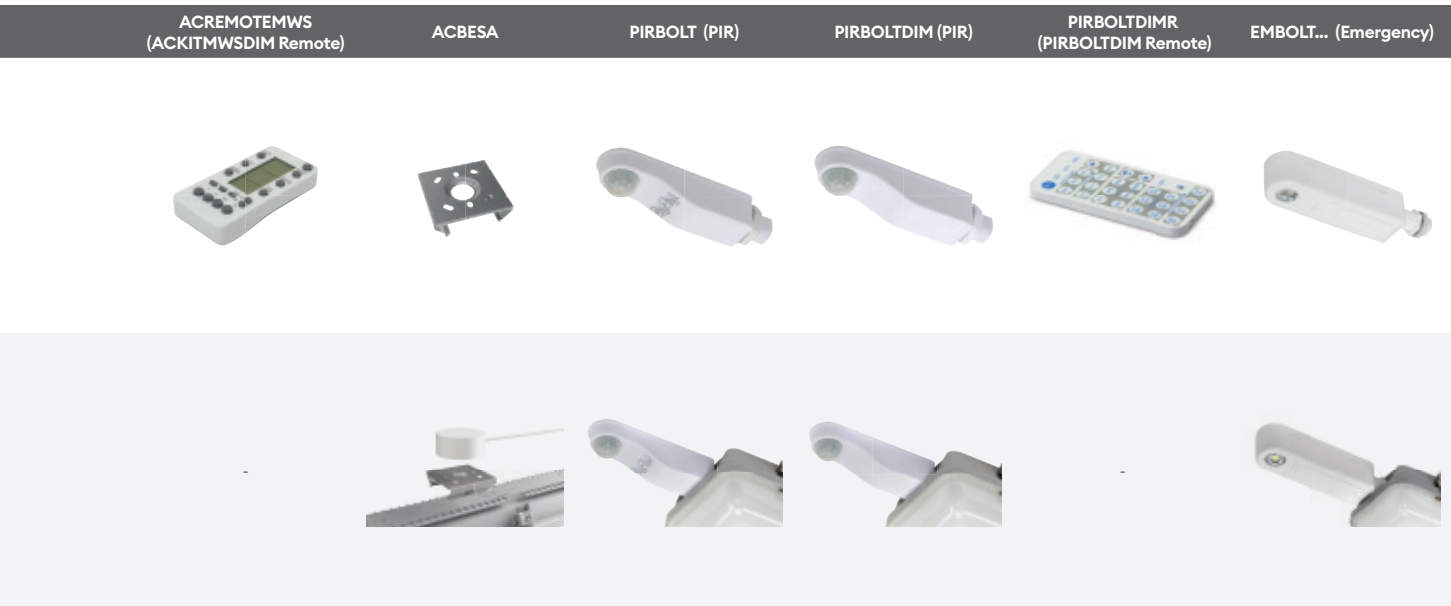

Product Code	Type	Compatible with
PIRBOLT	On/Off PIR sensor with Lux level switch	Caiman Versa
PIRBOLTDIM	Dimming PIR Sensor with Lux level switch (requires 0-10V driver)	Caiman Versa
PIRBOLTDIMR	Remote control for use with PIRBOLTDIM	Caiman Versa
EMBOLTMCOR	3 hour emergency conversion pack, corridor area, manual test	Caiman Versa
EMBOLTMOPEN	3 hour emergency conversion pack, open area, manual test	Caiman Versa
EMBOLTSCOR	3 hour emergency conversion pack, corridor area, self-test	Caiman Versa
EMBOLTSOPEN	3 hour emergency conversion pack, open area, self-test	Caiman Versa

# Anti-corrosives

- IP66** IP66 for total dust ingress protection
- IK10** IK10 rated high resistance against impact and vandalism
-  Tool-less installation method making for a fast installation

Guarantee	5 years guarantee
Wattage	20W
IP rating	IP66
IK rating	IK10
Dimmable	No
Input	220-240V AC
LED lifetime	L70 50,000h
Emergency version available	No
Install connector type	Push-fit terminal, loop-in/loop-out
Ambient temperature	-20°C - 30°C
Electric class	2



# Polaris 4ft

Single & Twin

2 year  
on site  
guarantee




Tool-less  
installation



Fixing clip



Product code	Feature	Type	W	CCT	∠°	lm	lm/W	Energy
POL112N	Single	Standard	20W	4000K	130°	2600	130	
POL212N	Twin	Standard	34W	4000K	130°	4700	138	

# Polaris 5ft

Single & Twin

2 year  
on site  
guarantee



Tool-less  
installation



Fixing clip




Product code	Feature	Type	W	CCT	∠°	lm	lm/W	Energy
POL115N	Single	Standard	30W	4000K	130°	4000	133	
POL215N	Twin	Standard	50W	4000K	130°	6750	135	

## Anti-corrosives

- IP66 for total dust ingress protection
- IK10 rated high resistance against impact and vandalism
- Tool-less installation method making for a fast installation

Guarantee	5 years guarantee
Wattage	30W
IP rating	IP66
IK rating	IK10
Dimmable	No
Input	220-240V AC
LED lifetime	L70 50,000h
Emergency version available	No
Install connector type	Push-fit terminal, loop-in/loop-out
Ambient temperature	-20°C - 30°C
Electric class	2



# High bays





## Springbok Lite

Economical high bay for fast return on investment

### Energy savings

**Payback as quick as 2 months**

Provide slightly more light, whilst using much less power, resulting in excellent cost savings and quick payback.

Springbok Lite	Replaces old HIT / HSE fittings	Replaces T5 fitting	Energy savings
200W	400W	2 x 80W	<b>Saving up to 46%</b>
150W	250W	4 x 49W	<b>Saving up to 54%</b>
80W	150W	2 x 80W	<b>Saving up to 43%</b>

**Adding lighting control can save up to 82% of your existing energy usage.**

### Refractor accessories

Boost your light distribution by 20% with a decorative refractor. Reduces glare to <UGR22.



**HBL1REFR**  
For 80W product



**HBL2REFR**  
For 100W product



**HBL3REFR**  
For 200W product

## Microwave sensors

### For up to an additional 82% energy savings

For added control and energy savings use a microwave sensor kit.  
Product code : **HBLMWS**

#### Motion sensor

Only turn your light on when movement is detected.

#### Daylight switching

Only turn your light **on** when there is not enough natural light.


#### Quick & easy installation

Kit includes a junction box for cabling and counter weight for balance.



## Quick & easy installation

Pre-wired with 1.5m of H05RN-F cable for ease of installation.



## IP65 & IK08

High impact resistance ensures that accidental collisions will not adversely effect the performance of the product. Combine this with high water and dust resistance and it means that the range of installation environments is vast.



## Warranty

Long warranty for piece of mind.



**4 year  
guarantee**



**2 year on-site  
warranty**

# Area Bay

Designed to perform, built to last  
& connected to save energy



## Best practice for energy & cost savings

Save energy & money on your project by following these 3 easy steps, and make savings like the example below.

### 1 Quality optics

Light the space using less fittings with our unique lens optic, designed to direct the light where it is needed.

Efficient lighting design

### 2 Motion detection

Use our **HBPIR** or **HBMWS** motion sensor to ensure your light is only on when a person is detected.

Save up to 60%

### 3 Daylight detection

Enable daylight switching, or if your zone is automated, daylight harvesting, to ensure your electric light works in sync with the natural light within the space.

Save up to an additional 22%

Energy rate £/kWh: £0.37	Existing fitting	1 Collingwood fitting	2 Collingwood fitting with motion sensor	3 Collingwood fitting with motion sensor and daylight detection
Average lamp life	12,000 hours	54,000 hours	54,000 hours	54,000 hours
Quantity of fittings	100	100	100	100
Watts per fitting	400W	150W	150W	150W
Energy £/Year	£106,649	£48,922	£19,569	£8,806
Energy savings £/Year	-	£57,727	£87,080	£97,843
Energy savings over 5 years	-	£288,635	£435,400	£489,215

## Quality optics

To light a space efficiently, a luminaire optic must be designed to direct the light to where it is needed. Our unique lens optic changes the light distribution to create the perfect wide beam application.

Less fittings required providing energy and cost savings.



## Motion sensors - Quick & easy installation

Save time on the installation ultimately savings costs on installation.

### Quick tool-less connection

Tool-less, plug-in and twist sensors make installation quick & easy for you to adopt lighting control, even interchange your sensors should your floorspace be re-configured.



Takes under  
**3 seconds**



Installation is  
**Tool-less**

### Simple & easy remote

Commission your Area Bay from the floor.

**Hold Time:** how long the light stays on after movement is no longer detected

**Stand-by Dimming:** what level the light should dim to after movement is no longer detected

**Stand-by Period:** how long after no movement is detected, does the luminaire wait until switching off

**Detection Range:** enables you to adjust the sensitivity of sensor

**Daylight Threshold:** set to only switch the light on when the natural light in the space is insufficient for the task



## PIR Vs Microwave sensors

It's important to know when to choose between a PIR sensor and a Microwave sensor.

### PIR sensor

Ideal for use in aisles.

Perfect for avoiding nuisance triggering in areas that may have vibrations.

**Product code : HBPIR**  
with daylight switch

**Product code : HBPIRDL**  
PIR with daylight harvest sensor



### Microwave sensor

Ideal for use in open areas.

Perfect for areas that need to trigger when the sensor is not in a direct line of sight.

**Product code : HBMWS**  
with daylight switch



# Area Bay

Designed to perform, built to last  
& connected to save energy

## Refractor accessories

Boost your light distribution by 20% with a decorative refractor.  
Reduces glare to <UGR22.



**HBA12REFR**  
For 100W - 150W product



**HBA3REFR**  
For 200W product



**HBA4REFR**  
For 240W product

## Step-Dim

Our sensor can signal the light to switch **off** when no motion is detected, or DIM down to a low level to avoid complete darkness and help safety.



## Warranty

Long warranty for piece of mind.



5 year  
guarantee



2 year on-site  
warranty


# Design guide

## Which high bay is suited to your project?

Use the diagram below to choose your ideal high bay, or for a consultation on your requirements, contact our expert team today. The designers inside The Studio at Collingwood are able to offer expertise throughout the lighting design process, putting together full schemes based around our comprehensive product range. Detailed client consultation ensures a high quality and tailored service.

### Springbok Lite - Open goods storage

Use the diagram below for open goods storage areas (**200lux is ideal**).

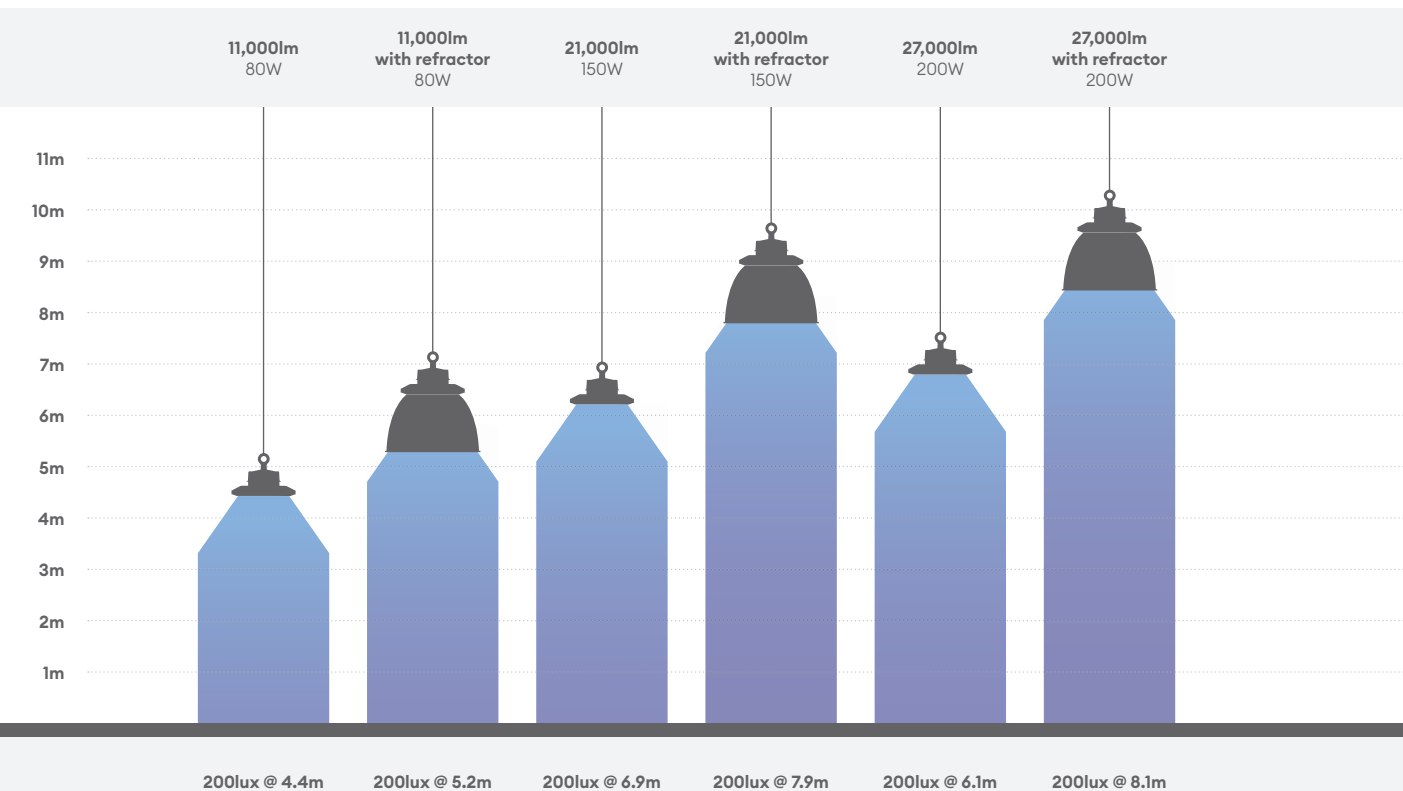


# Design guide

## Which high bay is suited to your project?

Use the diagram below to choose your ideal high bay, or for a consultation on your requirements, contact our expert team today. The designers inside Collingwood are able to offer expertise throughout the lighting design process, putting together full schemes based around our comprehensive product range. Detailed client consultation ensures a high quality and tailored service.

### Area Bay - Open goods storage


Use the below for open goods storage areas (200lux is ideal).

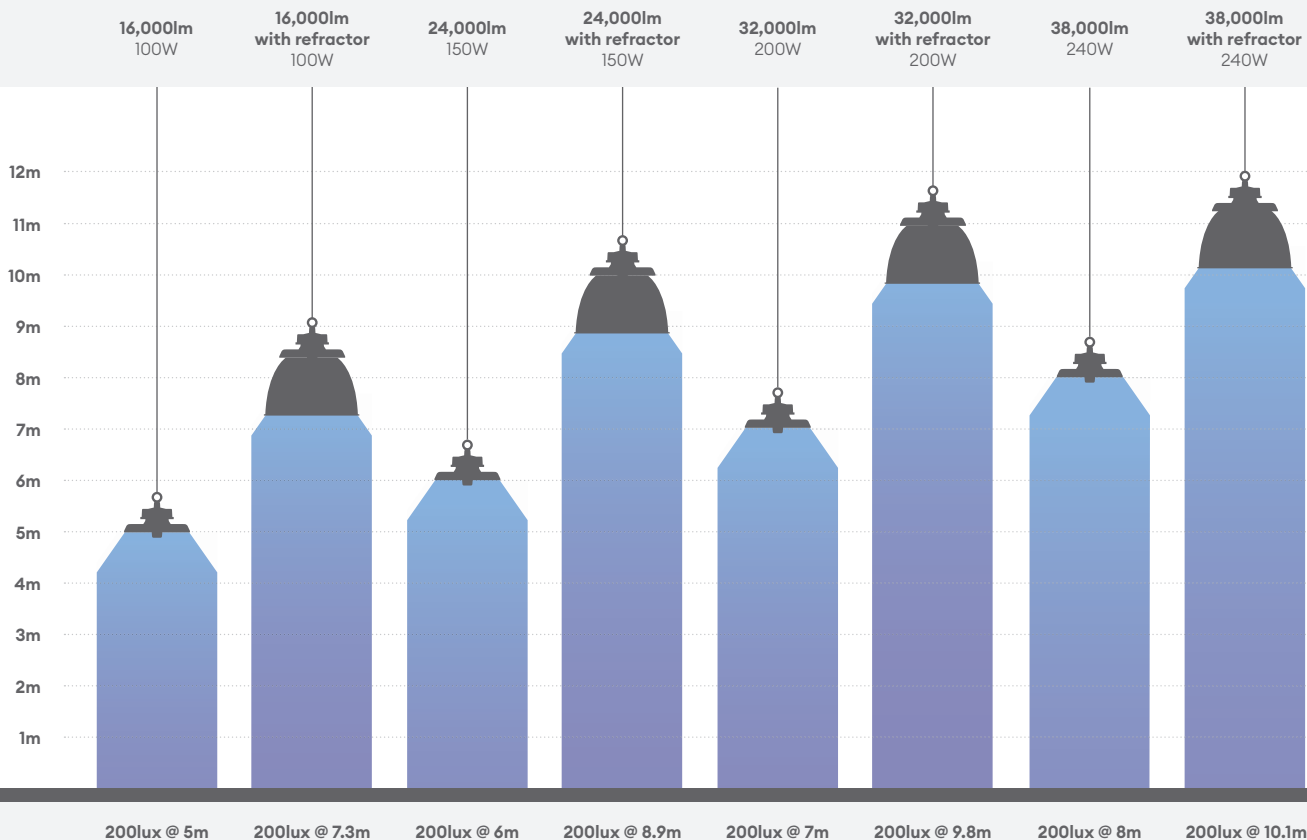



# Area Bay - Rack storage floor

Use the below for rack storage floors (150lux is ideal).

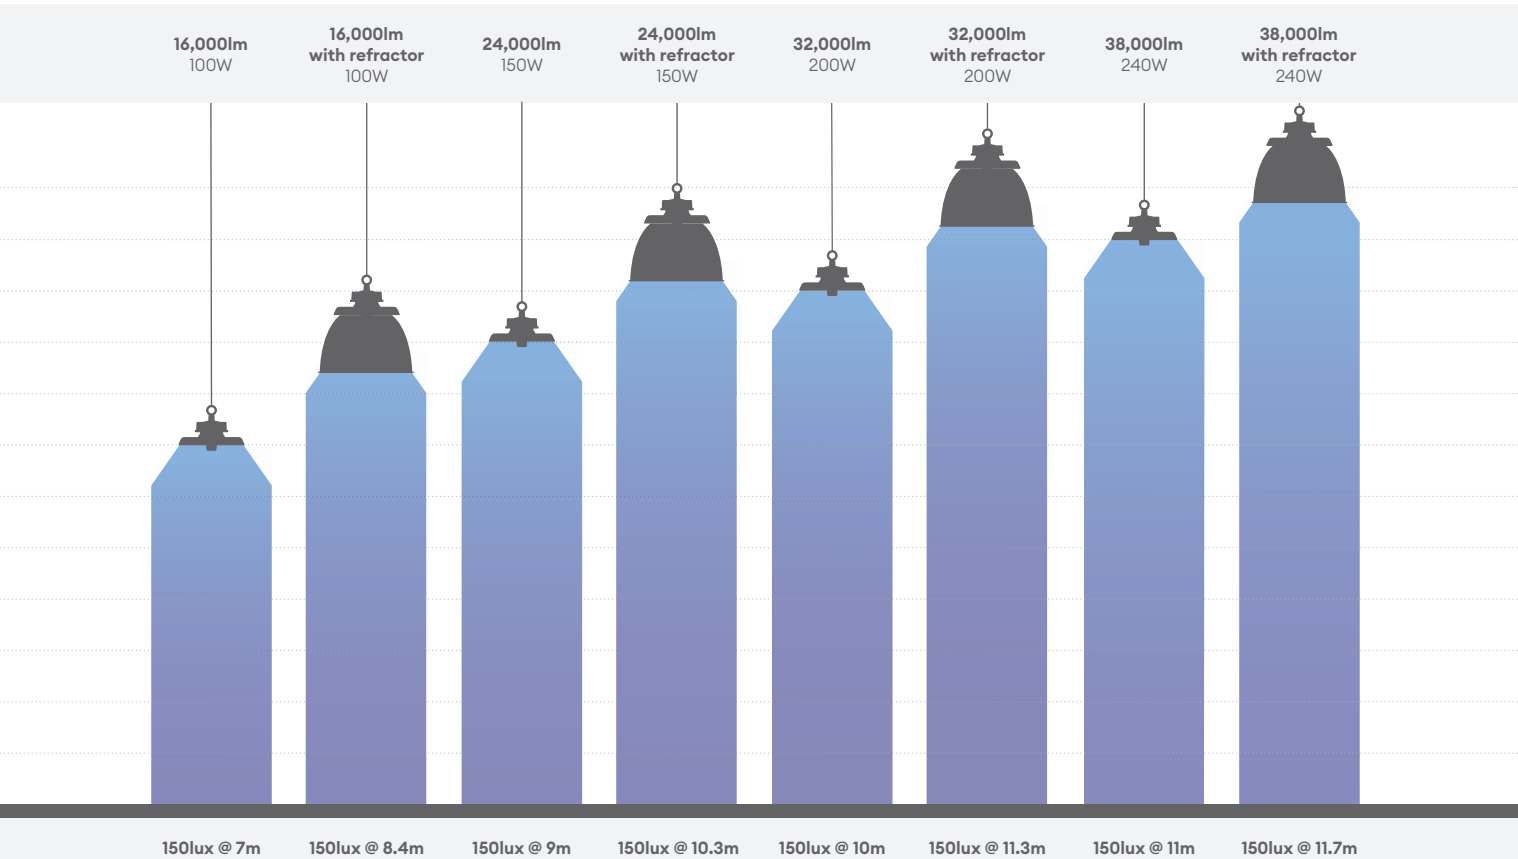

# High bays



High efficacy of  
160lm/W




Very light weight for  
easy installation



Emergency option  
available


Guarantee	5 years, 2 years on emergency battery
Wattage	100W
IP rating	IP65
IK rating	IK10
Dimmable	Yes (0-10V, PWM and DALI-2)
Input	220-240V AC Surge Protection 6KV
LED lifetime	L80 54,000h
Emergency version available	Yes
Install connector type	Flying lead
Ambient temperature	-40°C - 50°C
Electric class	1

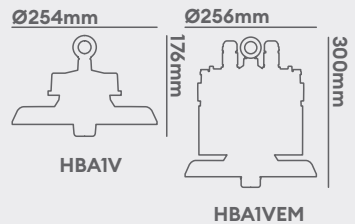

# Area Bay 16,000lm 100W

100W High bay luminaire (Replaces 2x80W T5)

2 year  
on site  
guarantee

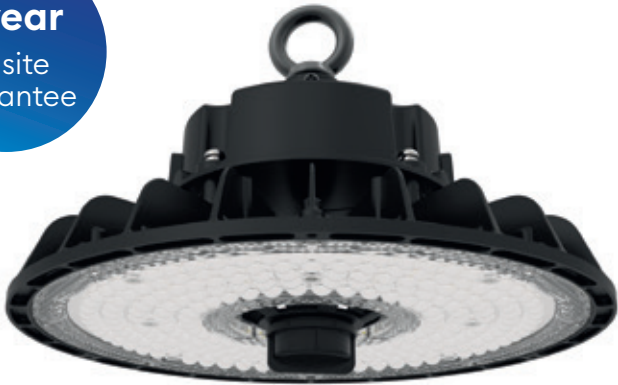

UGR22  
Refractor




Product code	Finish	Type	W	CCT	Beam angle	Im	Im/W	Em Im	Energy
HBA1V	Matt black RAL9017	Standard	100W	4000K	110°	16000	160	-	
HBA1VEM	Matt black RAL9017	Emergency	100W	4000K	110°	16000	160	650	
HBA1D	Matt black RAL9017	DALI-2	100W	4000K	110°	16000	160	-	

# Area Bay 24,000lm 150W

150W High bay luminaire (Replaces 250W or 4X49W T5)

2 year  
on site  
guarantee

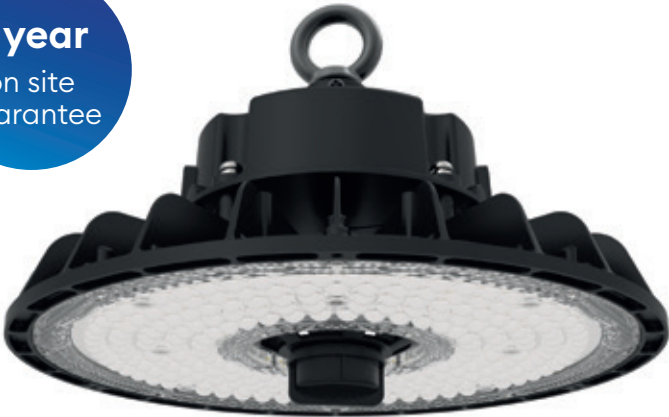

UGR22  
Refractor




Product code	Finish	Type	W	CCT	⤴	lm	lm/W	Em lm	Em lm
HBA2V	Matt black RAL9017	Standard	150W	4000K	110°	24000	160	-	
HBA2VEM	Matt black RAL9017	Emergency	150W	4000K	110°	24000	160	650	
HBA2D	Matt black RAL9017	DALI-2	150W	4000K	110°	24000	160	-	

## High bays

- High efficacy of 160lm/W**
- Very light weight for easy installation**
- Emergency option available**

Guarantee	5 years, 2 years on emergency battery
Wattage	150W
IP rating	IP65
IK rating	IK10
Dimmable	Yes (0-10V, PWM and DALI-2)
Input	220-240V AC Surge Protection 6KV
LED lifetime	L80 54,000h
Emergency version available	Yes
Install connector type	Flying lead
Ambient temperature	-40°C - 50°C
Electric class	1



## High bays



**High efficacy of**  
160lm/W




**Very light weight for**  
easy installation



**Emergency option**  
available

Guarantee	5 years, 2 years on emergency battery
Wattage	200W
IP rating	IP65
IK rating	IK10
Dimmable	Yes (0-10V, PWM and DALI-2)
Input	220-240V AC Surge Protection 6KV
LED lifetime	L80 54,000h
Emergency version available	Yes
Install connector type	Flying lead
Ambient temperature	-40°C - 50°C
Electric class	1

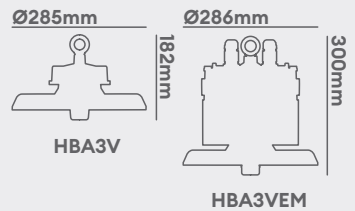

# Area Bay 32,000lm 200W

200W High bay luminaire (Replaces 400W or 4x80W T5)

**2 year**  
on site  
guarantee



**UGR22**  
Refractor



Product code	Finish	Type	W	CCT	∠°	lm	lm/W	Em lm	Energy
HBA3V	Matt black RAL9017	Standard	200W	4000K	110°	32000	160	-	
HBA3VEM	Matt black RAL9017	Emergency	200W	4000K	110°	32000	160	650	
HBA3D	Matt black RAL9017	DALI-2	200W	4000K	110°	32000	160	-	

# Area Bay 38,000lm 240W

240W High bay luminaire

2 year  
on site  
guarantee



UGR22  
Refractor



Product code	Finish	Type	W	CCT	Beam angle	Im	lm/W	Em lm	Energy
HBA4V	Matt black RAL9017	Standard	240W	4000K	110°	38400	160	-	
HBA4VEM	Matt black RAL9017	Emergency	240W	4000K	110°	38400	160	650	
HBA4D	Matt black RAL9017	DALI-2	240W	4000K	110°	38400	160	-	

## High bays



High efficacy of  
160lm/W



Very light weight for  
easy installation



Emergency option  
available

Guarantee	5 years, 2 years on emergency battery
Wattage	240W
IP rating	IP65
IK rating	IK10
Dimmable	Yes (0-10V, PWM and DALI-2)
Input	220-240V AC Surge Protection 6KV
LED lifetime	L80 54,000h
Emergency version available	Yes
Install connector type	Flying lead
Ambient temperature	-40°C - 50°C
Electric class	1

Ø315mm



HBA4V

Ø316mm














HBA4VEM

# Area bay accessories

Make your area bay perfect for your installation

Optional microwave sensors, brackets and remote control accessories combine excellence and unrivalled cost savings.

Use the tables below to choose the perfect accessory

	HBPIR	HBDLS	HBPIRDL	HBMWS	HBREM	HBLEMGREM
Accessory on its own						
Accessory on product					-	

Product Code	Type	Compatible with
HBPIR	Passive infra-red (PIR) motion sensor with daylight threshold switch (Max. recommended mounting height is 13 metres)	Area bay
HBDLS	Daylight harvesting sensor with photocell (Max. recommended mounting height is 13 metres)	Area bay
HBPIRDL	Passive infra-red motion sensor with daylight dimming/harvesting	Area bay
HBMWS	Microwave motion sensor with daylight threshold switch (Max. recommended mounting height is 13 metres)	Area bay
HBREM	Remote control for commissioning	Area bay
HBLEMGREM	High Bay, 6W 1000lm, Emergency Conversion Pack, Manual test	Area bay



Product Code	Type	Compatible with
HBA12REFR	80° prismatic refractor for intensifying light beam	Area bay
HBA3REFR	80° prismatic refractor for intensifying light beam	Area Bay
HBA4REFR	80° prismatic refractor for intensifying light beam	Area Bay
HBROD	HB Rod Mount 1.5M Kit (M20 thread for fixing)	Area Bay
HBBRA	HB Bracket Mount for Standard Luminaire	Area Bay
HBBRAEXT	HB Extended Bracket Mount for Standard Luminaire	Area Bay
HBBRAEM	HB Bracket Mount for Emergency Luminaire	Area Bay



## High bays



High efficacy of  
138lm/W




Sensor kit includes  
junction box and  
counter weight



Emergency option  
available

Guarantee	4 years (product), 2 years (battery), 2 years (on-site)
Wattage	80W
IP rating	IP65
IK rating	IK08
Dimmable	No
Input	220-240V AC Surge Protection 6KV
LED lifetime	L70 54,000h
Emergency version available	Yes
Install connector type	Flying lead
Ambient temperature	-20°C - 40°C
Electric class	1

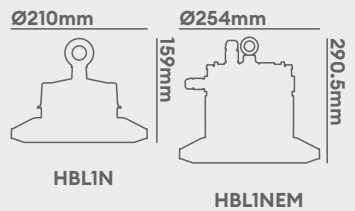

HBL1N

HBL1NEM

# Springbok Lite

## 11,000lm 80W

80W High bay luminaire (Replaces 150W or 2x80W T5)

2 year  
on site  
guarantee



UGR22  
Refractor



Product code	Finish	Type	W	CCT	Beam angle	lm	lm/W	Em lm	Energy
HBL1N	Matt black RAL9017	Standard	80W	4000K	110°	11000	138	530	
HBL1NEM	Matt black RAL9017	Emergency	80W	4000K	110°	11000	138	530	

# Springbok Lite

## 21,000lm 150W

150W High bay luminaire (Replaces 250W or 4X49W T5)

**2 year**  
on site  
guarantee



UGR22  
Refractor



Product code	Finish	Type	W	CCT	Beam angle	lm	lm/W	Em lm	Energy
HBL2N	Matt black RAL9017	Standard	150W	4000K	110°	21000	140	530	
HBL2NEM	Matt black RAL9017	Emergency	150W	4000K	110°	21000	140	530	

### High bays



High efficacy of  
140lm/W




Sensor kit includes  
junction box and  
counter weight



Emergency option  
available

Guarantee	4 years (product), 2 years (battery), 2 years (on-site)
Wattage	150W
IP rating	IP65
IK rating	IK08
Dimmable	No
Input	220-240V AC Surge Protection 6KV
LED lifetime	L70 54,000h
Emergency version available	Yes
Install connector type	Flying lead
Ambient temperature	-20°C - 40°C
Electric class	1

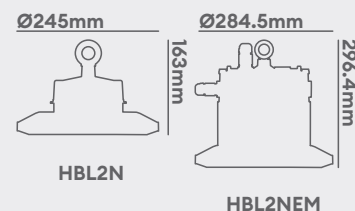

# High bays



High efficacy of 135lm/W




Sensor kit includes junction box and counter weight



Emergency option available

Guarantee	4 years (product), 2 years (battery), 2 years (on-site)
Wattage	200W
IP rating	IP65
IK rating	IK08
Dimmable	No
Input	220-240V AC Surge Protection 6KV
LED lifetime	L70 54,000h
Emergency version available	Yes
Install connector type	Flying lead
Ambient temperature	-20°C - 40°C
Electric class	1

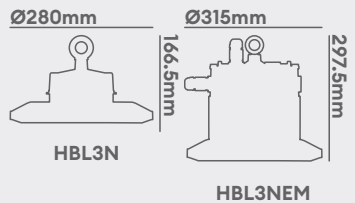

# Springbok Lite


## 27,000lm 200W

200W High bay luminaire (Replaces 400W or 4x80W T5)

2 year  
on site  
guarantee



UGR22  
Refractor



Product code	Finish	Type	W	CCT	°	Im	lm/W	Em lm	Energy
HBL3N	Matt black RAL9017	Standard	200W	4000K	110°	27000	135	530	
HBL3NEM	Matt black RAL9017	Emergency	200W	4000K	110°	27000	135	530	

# Springbok Lite accessories

Make your high bay perfect for your installation

Optional reflectors, refractor and microwave sensor accessories combine excellence and unrivalled cost savings. The reflector and its 80 degrees beam angle will intensify the lighting direction, while the refractor decreases its intensity, softening the glare.

Use the tables below to choose the perfect accessory



Product Code	Type	Compatible with
HBL1REFR	80° prismatic refractor for intensifying light beam	Springbok Lite 80W
HBL2REFR	80° prismatic refractor for intensifying light beam	Springbok Lite 150W
HBL3REFR	80° prismatic refractor for intensifying light beam	Springbok Lite 200W
HBLMWS	Microwave sensor kit inc junction box and counterweight	Springbok Lite 80W, 150W & 200W
HBLEMGREM	High Bay, 6W 1000lm, Emergency Conversion Pack	Springbok Lite 80W, 150W & 200W
HBROD	HB Rod Mount 1.5M Kit (M20 thread for fixing)	Springbok Lite
HBBRA	HB Bracket Mount for Standard Luminaire	Springbok Lite
HBBRAEXT	HB Extended Bracket Mount for Standard Luminaire	Springbok Lite
HBBRAEM	HB Bracket Mount for Emergency Luminaire	Springbok Lite

# High/Low bays





# High/Low bays

## Wattage & CCT switchable

### Wattage switchable: one light, three wattage outputs

RackBay provides both the output of a single wattage or three wattages within the same product. Adjust the wattage switch during installation.

Product	0-10V wattage switchable output	
<b>Rackbay 60-100W</b> 3000K/4000K	60-80-100W	8700/9000lm, 11600/12000lm, 14500/15000lm
<b>Rackbay 160-200W</b> 3000K/4000K	160-180-200W	22400/24000lm, 25200/27000lm, 28000/30000lm
<b>Rackbay 200-240W</b> 3000K/4000K	200-220-240W	28000/30000lm, 30800/33000lm, 33600/36000lm

Product	DALI-2 single wattage output	
<b>Rackbay 100W</b> 3000K/4000K	100W	14500/15000lm
<b>Rackbay 200W</b> 3000K/4000K	200W	28000/30000lm
<b>Rackbay 240W</b> 3000K/4000K	240W	33600/36000lm

### CCT switchable: one light, two CCT temperatures

Our colour switchable rackbays allows you to stock 2 colour temperatures in 1 product (3000K & 4000K).

#### Advantages

- Customer can choose which colour they prefer.
- Adjust using a switch during installation.

#### 3000K Warm White



#### 4000K Cool White





# Mounting heights

Use the diagram below to choose your ideal Rack bay, or for a consultation on your requirements, contact our expert team today.

Product	Recommended mounting height
Rackbay 60-100W	less than 5m
Rackbay 160-200W	5 -10m
Rackbay 200-240W	more than 10m to a maximum of 14m

# Sensor options

A choice of PIR, microwave and daylight control options save energy and take just a few seconds to fit.



# Emergency bolt-on

The emergency bolt-on are available for aisles, corridors and open areas.

## Up to 10m high

Install as high as 10m high.

## Quick attachment

Fast 4 minute conversion time.

## Easy attachment

M20 interface for easy installation.



EMBOLTM RACK



EMBOLT....

# Easy installation

The RackBay has been designed to be as easy as possible to install and maintain.

## Lightweight

With its unique and skilful design, the RackBay is extremely lightweight, allowing easy installation and maintenance whilst providing high lumen output.

## Aisle spaces

110x55 lens optics provide a rectangular light distribution that is ideal for mounting between 3m and 14m heights.

## Compact

Small in size, so it can be installed by an individual.

# Dimmable

As standard, the RackBay offers DALI-2 or 0-10V dimming technology, providing flexibility of control.



DALI-2, 0-10V

# IP20 & IK07

High impact resistance ensures that accidental collisions will not adversely effect the performance of the product. Combine this with IP20 resistance, meaning a great choice for warehouse racking areas.



## High/Low bays



**Colour Switchable**  
between 3000K and  
4000K



**Wattage Switchable**  
from 60W to 240W



**High efficacy of**  
150lm/W

<b>Guarantee</b>	5 years, 2 years on-site
<b>Wattage</b>	100W
<b>IP rating</b>	IP20
<b>IK rating</b>	IK07
<b>Dimmable</b>	Yes (DALI-2, 0-10V)
<b>Input</b>	220-240V AC Surge Protection 6KV
<b>LED lifetime</b>	L70 100,000h
<b>Emergency version available</b>	Yes, using converter
<b>Install connector type</b>	Flying lead
<b>Ambient temperature</b>	-30°C - 50°C
<b>Electric class</b>	1
<b>Mounting options</b>	Ceiling & suspended



# RackBay CSP 60-100W

Colour & wattage switchable low/high bay suitable for mounting between 3 and 14 metres high

**2 year**  
on site  
guarantee



**Bolt-on accessories**  
Emergency bolt-on  
accessories available

Product code	Finish	Type	W	CCT	°	lm	lm/W	Energy
LBR1D	White	DALI-2	100W	3000K	110x55°	14500	145	
				4000K		15000	150	
LBR1V	White	0-10V	60W	3000K	110x55°	8700	145	
				4000K		9000	150	
			80W	3000K	110x55°	11600	145	
				4000K		12000	150	
			100W	3000K	110x55°	14500	145	
				4000K		15000	150	

# RackBay CSP 160-200W

Colour & wattage switchable low/high bay suitable for mounting between 3 and 14 metres high


2 year  
on site  
guarantee




**Bolt-on accessories**  
Emergency bolt-on  
accessories available

Product code	Finish	Type	W	CCT	∠	lm	lm/W	Energy
LBR2D	White	DALI-2	200W	3000K	110x55°	28000	145	
				4000K		30000	150	
LBR2V	White	0-10V	160W	3000K	110x55°	22400	145	
				4000K		24000	150	
			180W	3000K	110x55°	25200	145	
				4000K		27000	150	
			200W	3000K	110x55°	28000	145	
				4000K		30000	150	

## High/Low bays

 Colour Switchable  
between 3000K and  
4000K

 Wattage Switchable  
from 60W to 240W

 High efficacy of  
150lm/W

Guarantee	5 years, 2 years on-site
Wattage	200W
IP rating	IP20
IK rating	IK07
Dimmable	Yes (DALI-2, 0-10V)
Input	220-240V AC Surge Protection 6KV
LED lifetime	L70 100,000h
Emergency version available	Yes, using converter
Install connector type	Flying lead
Ambient temperature	-30°C - 50°C
Electric class	1
Mounting options	Ceiling & suspended



## High/Low bays



**Colour Switchable**  
between 3000K and  
4000K




**Wattage Switchable**  
from 60W to 240W



**High efficacy of**  
150lm/W

<b>Guarantee</b>	5 years, 2 years on-site
<b>Wattage</b>	240W
<b>IP rating</b>	IP20
<b>IK rating</b>	IK07
<b>Dimmable</b>	Yes (DALI-2, 0-10V)
<b>Input</b>	220-240V AC Surge Protection 6KV
<b>LED lifetime</b>	L70 100,000h
<b>Emergency version available</b>	Yes, using converter
<b>Install connector type</b>	Flying lead
<b>Ambient temperature</b>	-30°C - 50°C
<b>Electric class</b>	1
<b>Mounting options</b>	Ceiling & suspended



# RackBay CSP 200-240W

Colour & wattage switchable low/high bay suitable for mounting between 3 and 14 metres high

**2 year**  
on site  
guarantee



**Bolt-on accessories**  
Emergency bolt-on  
accessories available

Product code	Finish	Type	W	CCT	△	lm	lm/W	Energy
LBR3D	White	DALI-2	240W	3000K	110x55°	33600	145	
				4000K		36000	150	
LBR3V	White	0-10V	200W	3000K	110x55°	28000	145	
				4000K		30000	150	
			220W	3000K	110x55°	30800	145	
				4000K		33000	150	
			240W	3000K	110x55°	33600	145	
				4000K		36000	150	





# RackBay accessories


Make your rackbay perfect for your installation

Optional lenses, PIR sensors and emergency accessories combine excellence and unrivalled cost savings.

Use the tables below to choose the perfect accessory for your RackBay

	HBPIR	HBDLS	HBPIRDL	HBMWS	HBREM
Accessory on its own					
Accessory on product					

Product Code	Type	Compatible with
HBPIR	Passive infra-red (PIR) motion sensor with daylight threshold switch (Max. recommended mounting height is 13 metres)	RackBay
HBDLS	Daylight harvesting sensor with photocell (Max. recommended mounting height is 13 metres)	RackBay
HBPIRDL	Passive infra-red motion sensor with daylight dimming/harvesting	RackBay
HBMWS	Microwave motion sensor with daylight threshold switch (Max. recommended mounting height is 13 metres)	RackBay
HBREM	Remote control for commissioning	RackBay

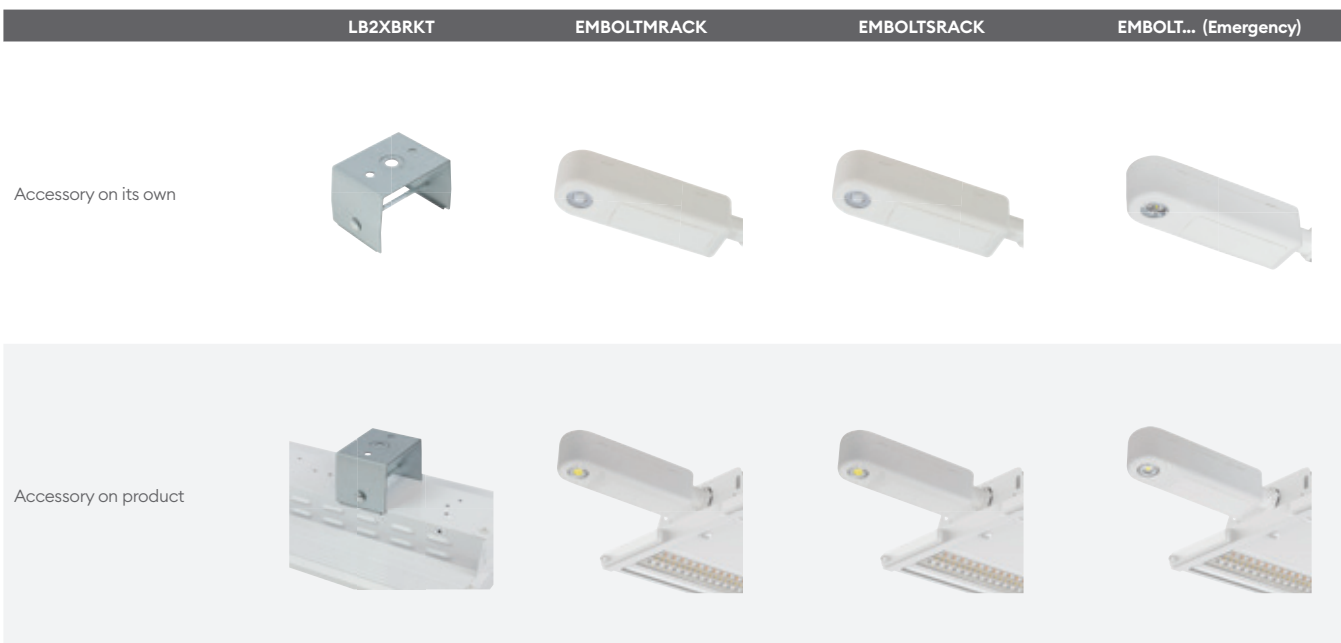

Product Code	Type	Compatible with
LB2XBRKT	2 x Mounting brackets	RackBay
EMBOLTRACK	Up to 10m Manual-test racking aisle area emergency bolt-on - Use >6m	RackBay
EMBOLSRACK	Up to 10m Self-test racking aisle area emergency bolt-on - Use >6m	RackBay
EMBOLTCOR	Up to 6m Manual-test corridor emergency bolt-on	RackBay
EMBOLTMOPEN	Up to 6m Manual-test open area lens emergency bolt-on	RackBay
EMBOLTSCOR	Up to 6m Self-test corridor emergency bolt-on	RackBay
EMBOLTSOPEN	Up to 6m Self-test open area lens emergency bolt-on	RackBay



# Industrial floodlights



# Industrial floodlights

## Easy installation

### Tool free access

The skilfully designed bracket simplifies the floodlight installation, cutting down costs and time, by allowing tool free access to the fixing screws.

### Angle stamped bracket

The floodlights have additional features included such as the mounting angles, which are stamped on the adjustable bracket for precise angles, along with star washers so the bracket can stay in the same position once angled.

### 1m cable

Installing the K2 floodlights couldn't be easier with a 1m of cable included for ease of installation, in line with Collingwood's demand for high quality, a nickel plated cable gland is included.

---

## Daylight savings

### Photocell kit accessory (PCELLKIT)

Outdoor photocell (Dusk to Dawn) sensor kit for use with all outdoor luminaires to keep the lights **off** when it is daylight outside.

Floodlight	Floodlights per photocell
Indy K3 - 65W - 125W	3
Indy K3 - 125W - 200W	2
Indy K3 - 300W	1



---

## Flicker free

In line with Collingwood values, the best electrical components have been included in the product design. This has resulted in our confidence to assert that the floodlights are flicker free fittings. Having flicker free floodlights, results in better visual comfort, and ensures a crisp image along side CCTV cameras.

## Windage factors

### Built for the toughest of environments

The windage factor for our range of floodlights are as follows:

K3 65-125W (2.5kg) 1.39m<sup>2</sup>

K3 125-200W (4.5kg) 1.09m<sup>2</sup>


K3 300W (7.1kg) 0.74m<sup>2</sup>



## Beam angle

### Symmetric

Symmetric beam angle provides light in a conic shape, illuminating the surface in all directions, from the centre to all sides, as the lens pushes the light equally in all directions.

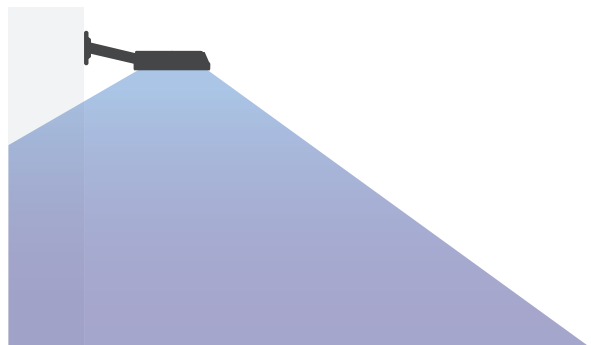

## IP65 & IK08

### Built for the toughest of environments

Durable and versatile, the K3 floodlights are IP65 rated and are suitable for outdoors, whether it is for a large warehouse, loading bays, or car parks.

The breather vent maintains the IP65 rating and prevents condensation. This prevents product losing output or product failure.



## Wattage switchable

### One light, three wattage outputs

Switchable Product enables one luminaire to meet various lux levels within a project using a lumen output switch

Low



Mid



High



# Industrial floodlights



High efficacy up to 156lm/W




Wattage switchable between 65-125W



Suitable for use in coastal applications

Guarantee	5 years (product), 2 years (on-site)
Wattage	65 / 80 / 125
IP rating	IP65
IK rating	IK07
Tilttable	180°
Dimmable	No
Input	220-240V AC Surge Protection 6KV
LED lifetime	L70 50,000h
Emergency version available	No
Install connector type	Flying lead
Ambient temperature	-40°C - 40°C
Electric class	1



# Indy K3 65-80-125W

Wattage Switchable Symmetrical Floodlight

2 year  
on site  
guarantee



**Photocell accessory PCELLKIT**  
compatible, 3 floodlights per photocell

Product code	Finish	W	CCT	∠	lm	lm/W	Energy
IFLB1N30	Black	65	3000K	120°	9500	146	
		80	3000K	120°	12000	150	
		125	3000K	120°	19000	152	
IFLB1N40	Black	65	4000K	120°	10000	154	
		80	4000K	120°	12500	156	
		125	4000K	120°	19500	156	

# Indy K3 125-165-200W

Wattage Switchable Symmetrical Floodlight

2 year  
on site  
guarantee



**Photocell accessory PCELLKIT**  
compatible, 2 floodlights per  
photocell

Product code	Finish	W	CCT	Beam angle	lm	lm/W	Energy
IFLB2N30	Black	125	3000K	120°	19000	152	
		165	3000K	120°	24500	148	
		200	3000K	120°	27000	135	
IFLB2N40	Black	125	4000K	120°	19500	156	
		165	4000K	120°	25000	156	
		200	4000K	120°	27500	152	

## Industrial floodlights



High efficacy up to  
152lm/W




Wattage switchable  
between 125-200W



Suitable for use in  
coastal applications

Guarantee	5 years (product), 2 years (on-site)
Wattage	125 / 165 / 200
IP rating	IP65
IK rating	IK07
Tilttable	180°
Dimmable	No
Input	220-240V AC Surge Protection 6KV
LED lifetime	L70 50,000h
Emergency version available	No
Install connector type	Flying lead
Ambient temperature	-40°C - 40°C
Electric class	1



# Industrial floodlights



High efficacy up to 147lm/W




High power 300W



Suitable for use in coastal applications

Guarantee	5 years (product), 2 years (on-site)
Wattage	300
IP rating	IP65
IK rating	IK07
Tilttable	180°
Dimmable	No
Input	220-240V AC Surge Protection 6KV
LED lifetime	L70 50,000h
Emergency version available	No
Install connector type	Flying lead
Ambient temperature	-40°C - 40°C
Electric class	1



# Indy K3 300W

Symmetrical floodlight suitable for commercial and industrial applications



**Photocell accessory PCELLKIT**  
compatible, 1 floodlight per photocell

Product code	Finish	W	CCT	∠°	lm	lm/W	Energy
IFLB3N30	Black	300	3000K	120°	44000	147	
IFLB3N40	Black	300	4000K	120°	44500	138	



# K3 floodlight accessories

Make your floodlight perfect for your installation

Make your floodlights more energy efficient and better for the environment by using cell kit accessories.

Use the table to choose how may photocell’s you require per product

PCELLKIT (Photocell kit)

Accessory on its own



Accessory on product

Install photocell kit in a separate location to floodlight

Floodlight	Floodlights per photocell
Indy K3 - 65W - 125W	3
Indy K3 - 125W - 200W	2
Indy K3 - 300W	1

Product Code	Type	Compatible with
PCELLKIT	Cell kit accessory	Indy K3 range

# Ready for **landscape season**

Check out our vast range of high quality landscape lighting







**Scan the QR code**

to visit our  
landscape range

# Landscape 2024

View the rest of our range at [www.collingwoodlighting.com](http://www.collingwoodlighting.com)



## Ground light

### GL019

Discreet yet powerful, our IP68 rated ground lights are perfect for outdoor and indoor use. Available in ultra-low glare through to frosted. Their small size makes them perfect for accent lighting.



## Spike light

### SL220

Stylish and versatile. With a 90° vertical and horizontal tilt, spike lights bring outdoor features and spaces to life. Available in four colour finishes, IP65 rated, these low energy lights can be adjusted as your garden grows.



## Marker light

### GL100 & GL200

Perfect for paths and steps, these domed lights are constructed of marine grade stainless steel or brass and comes with a 7-year warranty.







## Hooded light

### GL019 Eyelid

For steps, wall or ground lighting, hooded design directs light across the surface whilst reducing glare and eliminating upward light spill. Available in stainless steel and black finishes.



## Rotatable spot

### UL030 & UL010

A stylish swivel mounted outdoor light. Engineered to last with a 70,000hr life span and IP68 rated, this fully submersible light is the ideal way to bring your pond, swimming pool or landscape to life.



## LED line

### Volta wall washer

Ideal for highlighting architectural features, our LED line washes the facade of your property with light, whilst minimising light spill.



# 1901

Design your light  
Configure your solution in seconds



Over a century of design, expertise and innovation in lighting. The 1901 collection is elegantly understated, and yet infinitely customisable. Emitting an unparalleled quality of light, these LED luminaires add radiance to a room, whilst enhancing the purity of the natural colours.

Each downlight, spot light and pendant are custom built and hand finished to your specification. This design versatility, creates a limitless collection to complement each space. A uniform and stylish look, with layers of light that flow seamlessly throughout a room, or the entire property.

Your lighting scheme, your way, without compromise.



### Scan the QR code

to visit our online configurator and build your perfect 1901 product



### Pendants

- Semi-recessed or surface mounted
- Cable options
- IP44
- 12°, 24° or 50° beam angles
- 2700K, 3000K or 4000K
- Dim to Warm available
- DALI2, Mains or 1-10V dimmable



### Spots

- Semi-recessed or surface mounted
- Adjustable
- IP44
- 12°, 24° or 50° beam angles
- 2700K, 3000K or 4000K
- Dim to Warm available
- DALI2, Mains or 1-10V dimmable

### Fire-rated downlights

- Round or square
- Fixed or adjustable
- Bezel or plaster-in trimless
- IP44 or IP65
- 12°, 24° or 50° beam angles
- 2700K, 3000K or 4000K
- Dim to Warm available
- DALI2, Mains or 1-10V dimmable



# Catalogue 2024

**New Design**

**New Content**

**Made Sustainably**

**Over 100 New Products**



**Scan the QR code**  
for our online catalogue

Available to **order** or **download** now, for our full portfolio of Collingwood products.





## Collingwood

Brooklands House, Sywell Aerodrome  
Sywell Northampton, NN6 0BT

☎ +44 (0) 1604 495 151

✉ [sales@collingwoodgroup.com](mailto:sales@collingwoodgroup.com)

💻 [collingwoodlighting.com](http://collingwoodlighting.com)

Published August 2024



Follow Collingwood on social media

